

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

MA14272™

RATIONALE

GRAPHICS REDRAWN. "REQUIREMENTS" AND "NOTES" COMBINED. REFERENCED SPECIFICATIONS UPDATED. PTFE MATERIAL SPECIFICATION UPDATED. TYPO IN HEADING OF TABLE 1 CORRECTED. GENERAL FORMATTING UPDATED TO ALIGN WITH CURRENT DOCUMENT STANDARDIZATION. REVISION INDICATOR NOTE ADDED.

NOTICE

THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD DS14272. THIS SAE STANDARD MAY RETAIN THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.

ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL'S) MAY CONTINUE TO BE MANDATORY FOR DoD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.

FEDERAL SUPPLY CLASS
5340


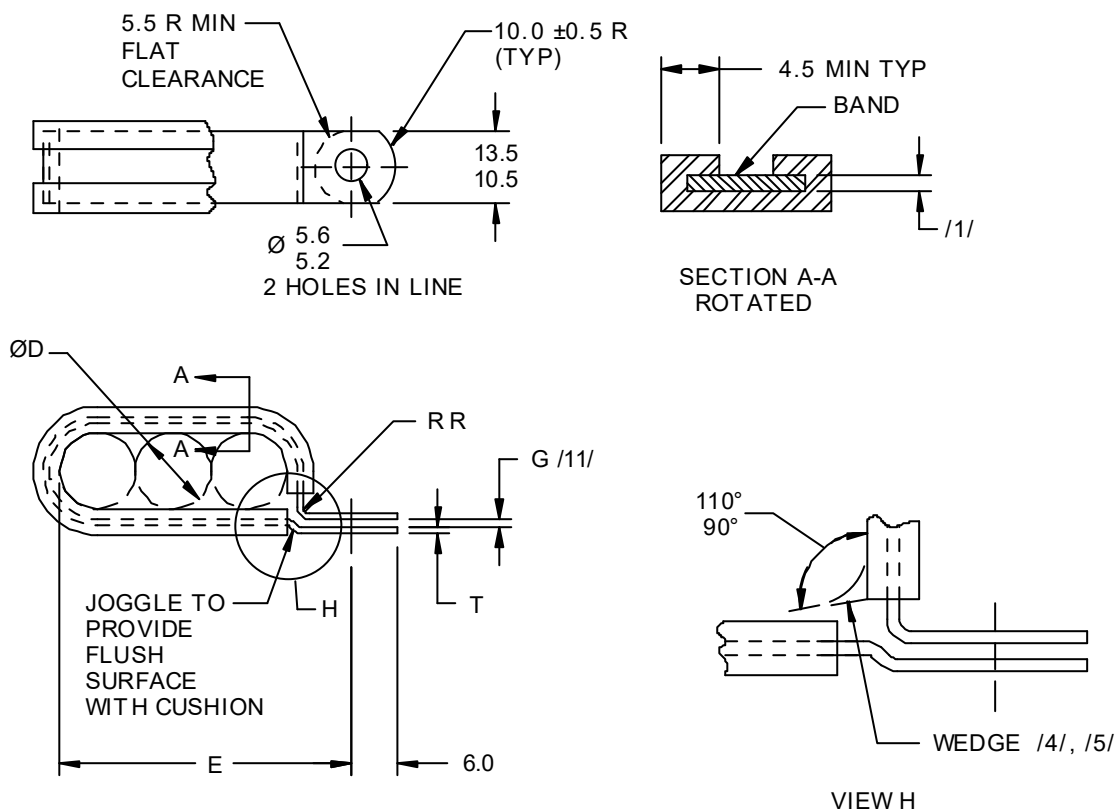


FIGURE 1

For more information on this standard, visit
<https://www.sae.org/standards/content/MA14272A/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3E

PROCUREMENT SPECIFICATION: MIL-C-8603



METRIC AEROSPACE STANDARD

(R) CLAMP, LOOP, CUSHIONED, ELONGATED, METRIC

MA14272™
SHEET 1 OF 4

REV.
A

Copyright © 2020 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

NOTES:

/1/ MATERIAL:

BAND:

- a. CODE LETTER D - ALUMINUM ALLOY, 2024-0 PER AMS-QQ-A-250/5, HEAT TREATED TO T42 CONDITION IN ACCORDANCE WITH AMS2770.
- b. CODE LETTER C - CORROSION RESISTANT STEEL, TYPE 302 IN ACCORDANCE WITH AMS5516 ANNEALED OR TYPE 321 IN ACCORDANCE WITH AMS5510.

CUSHION:

- a. CODE LETTER E - ETHYLENE PROPYLENE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
- b. CODE LETTER F - NITRILE RUBBER, 65-75 DUROMETER "A" IN ACCORDANCE WITH AMS3215 AND PROCUREMENT SPECIFICATION, 1.6 MM THICK.
- c. CODE LETTER G - CHLOROPRENE RUBBER, 65-75 DUROMETER "A" IN ACCORDANCE WITH AMS3209 AND PROCUREMENT SPECIFICATION, 1.6 MM THICK.
- d. CODE LETTER H - SILICONE RUBBER, 55-65 DUROMETER "A" IN ACCORDANCE WITH AMS3303, 1.6 MM THICK.
- e. CODE LETTER J - FLUOROSILICONE RUBBER IN ACCORDANCE WITH MIL-DTL-25988, TYPE II, CLASS 1, GRADE 60, 1.6 MM THICK.
- f. CODE LETTER T - POLYTETRAFLUOROETHYLENE (PTFE) IN ACCORDANCE WITH AMS3660, 0.6 MM THICK. /3/

2. FINISH:

MATERIAL CODE LETTER C - PASSIVATED IN ACCORDANCE WITH AMS2700.

MATERIAL CODE LETTER D - CHEMICAL FILM PER MIL-DTL-5541, CLASS 1A.

/3/ SURFACE TREATMENT:

CUSHIONS FABRICATED FROM PTFE SHALL BE SODIUM TREATED IN ACCORDANCE WITH THE SURFACE TREATMENT PARAGRAPHS OF AMS2491 TO REDUCE THE MATERIAL'S LUBRICITY.

ALL OTHER PARAGRAPHS OF AMS2491 SHALL NOT APPLY.

/4/ WHEN SPECIFIED, THE WEDGE SHALL BE INTEGRALLY MOLDED TO CUSHION USING PRESSURE AND HEAT TO ACCOMPLISH A BOND BETWEEN CUSHION AND WEDGE. /8/

/5/ THE WEDGE SHALL OVERLAP AND TOUCH THE OPPOSITE END OF THE CUSHION WHEN CLAMP MOUNTING HOLES ARE ALIGNED AND THE CLAMP IS COMPLETELY CLOSED.

6. CUSHION SELECTION GUIDE:

CHLOROPRENE
(MATERIAL CODE LETTER G):

RECOMMENDED FOR GENERAL PURPOSE USE IN AREAS CONTAMINATED WITH PETROLEUM BASE HYDRAULIC FLUID AND OCCASIONAL FUEL SPLASH. EXCELLENT OZONE RESISTANCE. NOT RESISTANT TO PHOSPHATE ESTER BASED FLUIDS. NOT FOR USE WITH TITANIUM TUBING. COLOR SHALL BE BLACK WITH A BLUE IDENTIFIER IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

POLYTETRAFLUOROETHYLENE (PTFE):
(MATERIAL CODE LETTER T)

RECOMMENDED FOR USE AT ELEVATED TEMPERATURES IN HYDROCARBON FUEL CONTAMINATED AREAS. ALSO RECOMMENDED FOR USE IN AREAS CONTAMINATED WITH PHOSPHATE TYPE HYDRAULIC FLUIDS AND OTHER SYNTHETIC LUBRICANTS. EXCELLENT OZONE RESISTANCE. COLOR SHALL BE SOLID BROWN.

FLUOROSILICONE:
(MATERIAL CODE LETTER J)

RECOMMENDED FOR USE AT ELEVATED TEMPERATURES IN PETROLEUM BASED FLUID CONTAMINATED AREAS. NOT RESISTANT TO PHOSPHATE ESTER BASED FLUIDS. EXCELLENT OZONE RESISTANCE. COLOR SHALL BE SOLID BLUE.

	METRIC AEROSPACE STANDARD	MA14272™	REV.
	(R) CLAMP, LOOP, CUSHIONED, ELONGATED, METRIC	SHEET 1 OF 1	A