

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
A

MA2101

FEDERAL SUPPLY CLASS
4720

RATIONALE

MA2101A HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

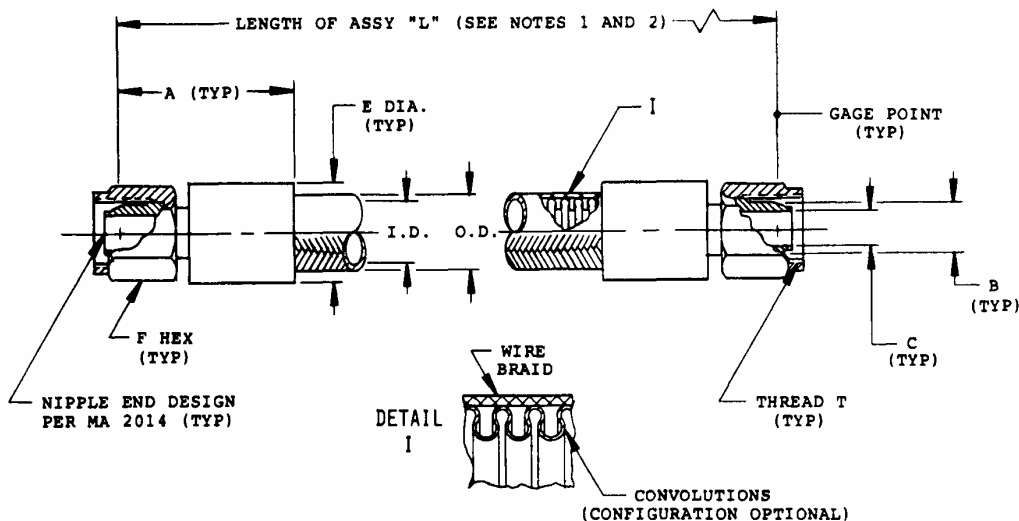


FIGURE 1

TABLE 1

HOSE ASSY PART NUMBER	HOSE ASSY SIZE (DN) ¹	THREAD T PER MA1370 4H 5H	A MAX MM	B GAGE DIA BASIC	C DIA MIN THRU MM	E DIA MAX ENVELOPE MM	F HEX (REF) MM
MA2101E	06	MJ12X1.25	31.8	7.5	3.35	22.9	14
MA2101G	08	MJ14X1.5	35.1	9.5	6.50	30.5	17
MA2101H	12	MJ18X1.5	39.6	13.5	8.76	33.0	22
MA2101J	16	MJ22X1.5	44.5	17.5	10.92	38.1	27
MA2101K	20	MJ27X1.5	49.3	21.5	14.4	44.2	32
MA2101M	25	MJ33X1.5	53.9	26.5	19.3	58.4	41
MA2101N	32	MJ42X2	60.5	33.7	23.4	72.4	46


¹ DN = NOMINAL TUBE OUTSIDE DIAMETER

TABLE 2

HOSE SIZE (DN) NOM	HOSE		21 °C (70 °F)			BALL DIA MM (SEE NOTE 5)	CORRECTION FACTOR MM (SEE NOTE 2)
	ID MIN MM	OD MAX MM	OPERATING PRESSURE MAX KPA	PROOF PRESSURE MIN KPA	BURST PRESSURE MIN KPA		
06	5.5	11.0	13 750	20 650	55 150	3	4.1
08	7.0	13.5	12 000	18 000	48 000	6	4.5
12	11.0	20.5	9 600	14 500	38 600	8	4.8
16	14.0	24.0	8 300	13 400	33 000	10	5.0
20	17.5	29.0	7 200	10 700	29 000	14	5.8
25	23.0	36.0	5 500	8 300	22 000	18	7.8
32	30.0	44.0	3 800	5 700	15 200	22	9.4

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/MA2101A>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D (SEE NOTE 7)

PROCUREMENT SPECIFICATION: MA2100



AEROSPACE STANDARD

HOSE ASSEMBLY, METAL, MEDIUM PRESSURE,
FLARELESS, WELDED, STRAIGHT TO STRAIGHT
FITTING ENDS, METRIC

MA2101
SHEET 1 OF 2

REV.
A

Documents

Copyright 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 3

HOSE ASSEMBLY LENGTH	AVAILABLE LENGTH INCREMENT	LENGTH TOLERANCE
UNDER 457 MM	(NOT LESS THAN) 3 MM	±3 MM
457 TO 914 MM	(NOT LESS THAN) 7 MM	±7 MM
914 TO 1270 MM	(NOT LESS THAN) 13 MM	±13 MM
OVER 1270 MM	(NOT LESS THAN) 26 MM	±1%

CONSTRUCTION AND PERFORMANCE: THESE HOSE ASSEMBLIES SHALL MEET THE CONSTRUCTION AND PERFORMANCE REQUIREMENTS OF MA2100 (ISO/DIS7314).

OPERATING CHARACTERISTICS: SEE PROCUREMENT SPECIFICATION.

MATERIALS AND FINISH: 321 OR OTHER CORROSION RESISTANT STEEL, PASSIVATED, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

IDENTIFICATION: SEE MA2100, 3.7

PROCUREMENT SPECIFICATION: MA2100 (ISO/DIS7314)

NOTES:

1. LENGTH "L" IS MEASURED FROM GAGE POINT TO GAGE POINT. SEE TABLE 3 FOR AVAILABLE LENGTH INCREMENTS. IN THE EXAMPLE OF PART NUMBER BELOW, LENGTH "L" IS DEFINED BY A FOUR DIGIT DASH NUMBER DESCRIBING THE HOSE ASSEMBLY LENGTH IN MM.
2. TO CONVERT "GAGE POINT TO GAGE POINT" TO "END TO END" MEASUREMENT, ADD TO "L" THE APPROPRIATE TABLE 2 CORRECTION FACTOR FOR EACH END FITTING.
3. THE HOSE ASSEMBLIES ARE INTENDED FOR USE IN LOW AND MEDIUM PRESSURE PNEUMATIC SYSTEMS UP TO 425 °C WITH SHORT DURATION EXCURSIONS TO 650 °C. MAXIMUM RATED OPERATING PRESSURE IS DEPENDENT ON AMBIENT OPERATING TEMPERATURE AND CAN BE DETERMINED FROM MA2100, TABLE 2.
4. DIMENSIONS IN MM. DIMENSIONING AND TOLERANCING ARE PER ANSI Y14.5M AND UNIT SYMBOLS ARE PER ANSI Y10.19, SAE J916 AND ANSI Z210.1.
5. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED THROUGH THE END FITTING. HOWEVER, A BALL OF THE SIZE DIAMETER LISTED IN TABLE 2 SHALL PASS THROUGH THE END FITTING AFTER THE END FITTING IS ATTACHED TO THE HOSE ASSEMBLY.
6. DO NOT USE UNASSIGNED SIZE CODES.
7. CHANGES TO THIS STANDARD DRAWING SHALL BE COORDINATED WITH SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS.
8. EXAMPLE OF PART NUMBER:

MA2101 **E** **0360**
 = 360 mm LENGTH (SEE NOTE 2)
 = DN06 NOMINAL DIAMETER SIZE (SEE TABLE 1)
 = BASIC PART NUMBER FOR A METAL, WELDED, MEDIUM PRESSURE HOSE ASSEMBLY WITH STRAIGHT TO STRAIGHT END FITTINGS

9. THE CHANGE BAR (I) LOCATED IN THE LEFT MARGIN IS FOR THE CONVENIENCE OF THE USER IN LOCATING AREAS WHERE TECHNICAL REVISIONS, NOT EDITORIAL CHANGES, HAVE BEEN MADE TO THE PREVIOUS ISSUE OF THIS DOCUMENT. AN (R) SYMBOL TO THE LEFT OF THE DOCUMENT TITLE INDICATES A COMPLETE REVISION OF THE DOCUMENT.

	AEROSPACE STANDARD		MA2101 SHEET 2 OF 2	REV. A
	HOSE ASSEMBLY, METAL, MEDIUM PRESSURE, FLARELESS, WELDED, STRAIGHT TO STRAIGHT FITTING ENDS, METRIC			

 Documents