

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

MA2171

RATIONALE

MA2171 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

FEDERAL SUPPLY CLASS
4720

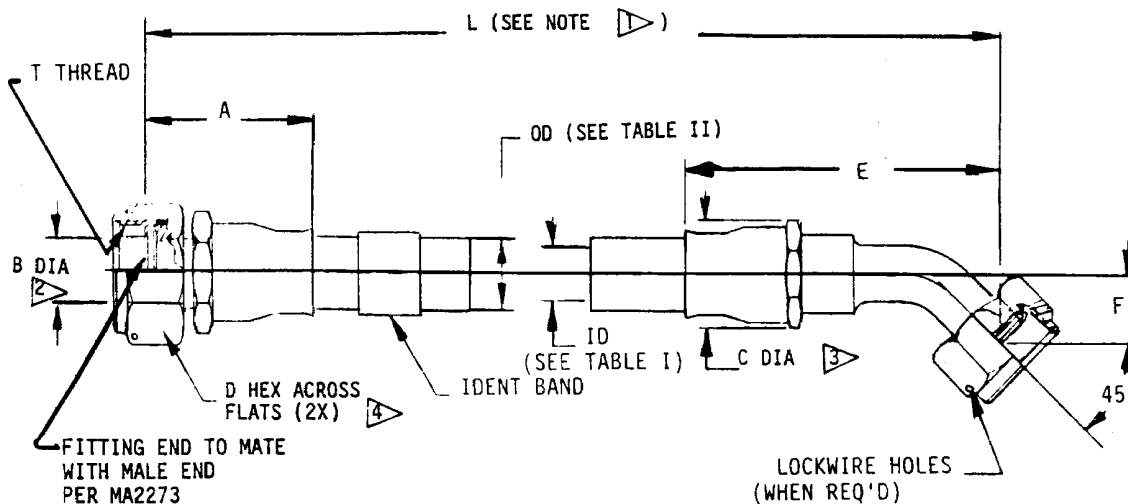



FIGURE 1

TABLE 1

HOSE ASSEMBLY NO. AND SIZE CODE		THREAD T PER AS1370 (ISO 5855) 4H-5H REF		I.D. MIN	A MAX	B		C  DIA MAX WITHOUT SLEEVING	D HEX REF	E MAX	F			
						BALL SIZE MIN THRU DIA					MIN DASH NO.	MAX mm	MIN	MAX
MA2171-06	6.0	MJ	12x1.25	5.38	33.02	4807	2.768	17.5	16.0	48.26	11.43	13.97		
MA2171-10	10.0	MJ	16x1.5	7.57	36.58	4812	4.775	20.32	21.0	59.69	13.13	15.24		
MA2171-12	12.0	MJ	18x1.5	9.93	40.64	4816	7.950	24.6	22.0	63.50	13.03	17.15		
MA2171-16	16.0	MJ	22x1.5	12.32	43.18	4818	9.525	27.9	27.0	68.58	15.75	19.43		
MA2171-20	20.0	MJ	27x1.5	15.29	46.99	4821	11.912	35.0	32.0	80.01	19.30	22.20		
MA2171-25	25.0	MJ	33x1.5	21.64	50.80	4829	18.262	42.2	41.0	88.90	22.61	24.13		

SAE values your input. To provide feedback
on this Technical Report, please visit
<http://www.sae.org/technical/standards/MA2171>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3D

PROCUREMENT SPECIFICATION: MA2007



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PTFE
CRES REINFORCED, 204 °C, 21,000 KPA, LIGHTWEIGHT
BEAM SEAL, STRAIGHT TO 45°, METRIC

MA2171
SHEET 1 OF 6

Copyright 2015 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

TABLE 2

SLEEVE CODE	SLEEVE MATERIAL	TEMP LIMIT °C	TOL- RANCE	HOSE OR SLEEVE OUTSIDE DIAMETER 					
				HOSE SIZE					
				06	10	12	16	20	25
-	(--) INDICATES HOSE ONLY NO SLEEVE	204	MAX	9.91	12.45	15.62	18.54	25.15	32.26
			MIN	9.14	11.56	14.86	17.53	24.13	31.24
A	ABRASION SLEEVE TUBULAR (TFE-AS1291 - Code B) 	204	MAX	12.70	15.24	18.54	21.34	28.19	35.56
			MIN	11.18	13.72	17.02	19.81	26.67	34.04
B	ABRASION SLEEVE COIL NYLON (AS1294) 	135	MAX	11.43	13.97	17.65	20.57	27.43	34.54
			MIN	9.91	12.45	16.13	19.05	25.91	33.02
C	FIRESLEEVE (AS1072 SIL-FG) (15 min)   	204	MAX	15.88	19.05	22.22	25.40	31.75	38.10
			MIN	12.7	15.88	19.05	22.22	28.58	34.92
E	ABRASION SLEEVE SHRINK-ON (FEB) 	177	MAX	10.77	13.72	16.89	20.07	27.18	34.29
			MIN	9.50	12.19	15.62	18.54	25.65	32.77
F	ABRASION SLEEVE SHRINK-ON (Polyolefin AS1073-Code B) 	135	MAX	11.43	14.22	17.65	20.57	27.43	34.54
			MIN	10.16	12.83	16.38	19.05	25.91	33.02
H	FIRESLEEVE INTEGRAL SILICONE (15 min) (AS1722)  	204	MAX	16.76	18.92	22.73	25.53	30.99	38.48
			MIN	15.24	17.40	21.21	24.00	29.46	36.96
K	INTEGRAL ABRASION SLEEVE (BRAIDED) POLYESTER 	149	MAX	12.45	14.48	17.65	20.32	27.18	34.29
			MIN	11.28	13.59	16.51	19.30	26.16	33.27
L	ABRASION SLEEVE COIL (PTFE-AS1293) 	204	MAX	13.97	15.24	18.54	21.90	28.19	35.56
			MIN	11.18	13.72	17.02	20.37	26.67	34.04



AEROSPACE STANDARD

HOSE ASSEMBLY, POLYTETRAFLUOROETHYLENE, PTFE
CRES REINFORCED, 204 °C, 21,000 KPA, LIGHTWEIGHT
BEAM SEAL, STRAIGHT TO 45°, METRIC

MA2171

SHEET 2 OF 6



Documents

Document Sharing Hub