

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A
MA3295™

FEDERAL SUPPLY CLASS
5340

RATIONALE


THIS TECHNICAL REPORT IS BEING STABILIZED BECAUSE IT COVERS TECHNOLOGY, PRODUCTS, OR PROCESSES WHICH ARE MATURE AND NOT LIKELY TO CHANGE IN THE FORESEEABLE FUTURE.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/MA3295A/>

THIRD ANGLE PROJECTION



CUSTODIAN: G-3/G-3E

PROCUREMENT SPECIFICATION: NONE



METRIC AEROSPACE STANDARD

CLIP - SPRING, TENSION,
INNER 5 MM BOLT HOLE,
AMS5525, METRIC

MA3295™

REV.
A



Documents

Copyright © 2023 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1990-11 REAFFIRMED 2012-12 STABILIZED 2023-10

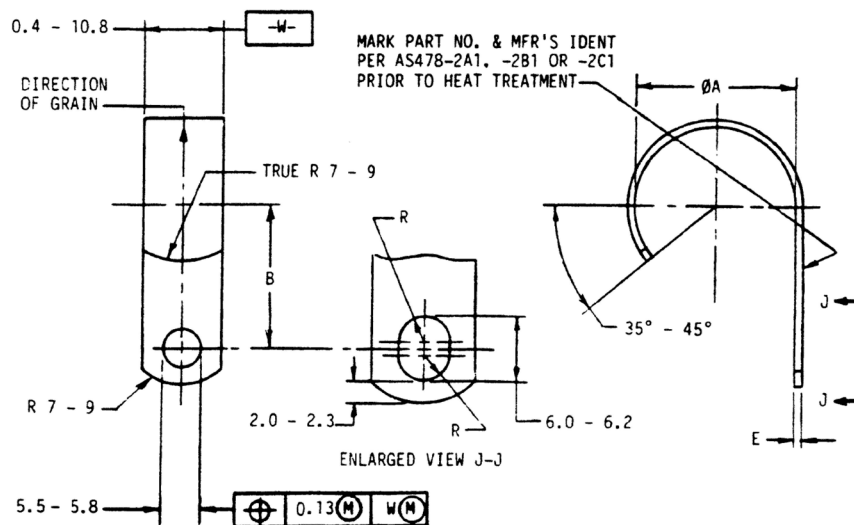


FIGURE 1

TABLE 1

PART NUMBER	NOMINAL TUBE OD METRIC mm	SUITABLE FOR TUBE INCH	θA	B	E	APPROX MASS kg/100
MA3295-02	3.2	0.125	7.2 - 7.8	13.1 - 13.6	0.7 - 0.9	0.203
MA3295-02	4	--	7.2 - 7.8	13.1 - 13.6	0.7 - 0.9	0.203
MA3295-04	5	0.1875	9.2 - 9.8	14.0 - 14.5	0.7 - 0.9	0.235
MA3295-04	6	0.250	9.2 - 9.8	14.0 - 14.5	0.7 - 0.9	0.235
MA3295-06	8	0.3125	11.2 - 11.8	15.0 - 15.5	0.7 - 0.9	0.268
MA3295-07	10	0.375	13.2 - 13.8	15.9 - 16.4	0.7 - 0.9	0.300
MA3295-08	--	0.4375	15.0 - 15.8	17.3 - 17.8	0.9 - 1.1	0.419
MA3295-08	12	0.500	15.0 - 15.8	17.3 - 17.8	0.9 - 1.1	0.419
MA3295-10	14	0.5625	17.0 - 17.8	18.2 - 18.7	0.9 - 1.1	0.459
MA3295-11	16	0.625	19.0 - 19.8	19.1 - 19.6	0.9 - 1.1	0.499
MA3295-12	18	0.6875	21.0 - 21.8	20.0 - 20.5	0.9 - 1.1	0.539
MA3295-13	20	0.750	23.0 - 23.8	21.0 - 21.5	0.9 - 1.1	0.580
MA3295-14	22	0.875	25.0 - 25.8	22.0 - 22.5	0.9 - 1.1	0.621
MA3295-15	25	1.000	28.0 - 28.8	23.5 - 24.0	0.9 - 1.1	0.682
MA3295-16	30	1.125	33.0 - 33.8	25.8 - 26.3	0.9 - 1.1	0.782
MA3295-17	32	1.250	35.0 - 35.8	27.0 - 27.5	0.9 - 1.1	0.824
MA3295-18	40	1.500	43.0 - 43.8	30.8 - 31.3	0.9 - 1.1	0.986



METRIC AEROSPACE STANDARD

CLIP - SPRING, TENSION,
INNER 5 MM BOLT HOLE,
AMS5525, METRIC

MA3295™
SHEET 1 OF 2

REV.



Documents

Document Sharing Hub