


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5340	
	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. THIS STANDARD HAS BEEN STABILIZED. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
MA3393	SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/MA3393A THIRD ANGLE PROJECTION 	
CUSTODIAN: G-3/G-3E (STABILIZED BY E-25)		PROCUREMENT SPECIFICATION: MA3399
	METRIC AEROSPACE STANDARD CLIP - SPRING, TENSION, OUTER 6.7 MM BOLT HOLE, AMS 5525, METRIC	MA3393 REV. A

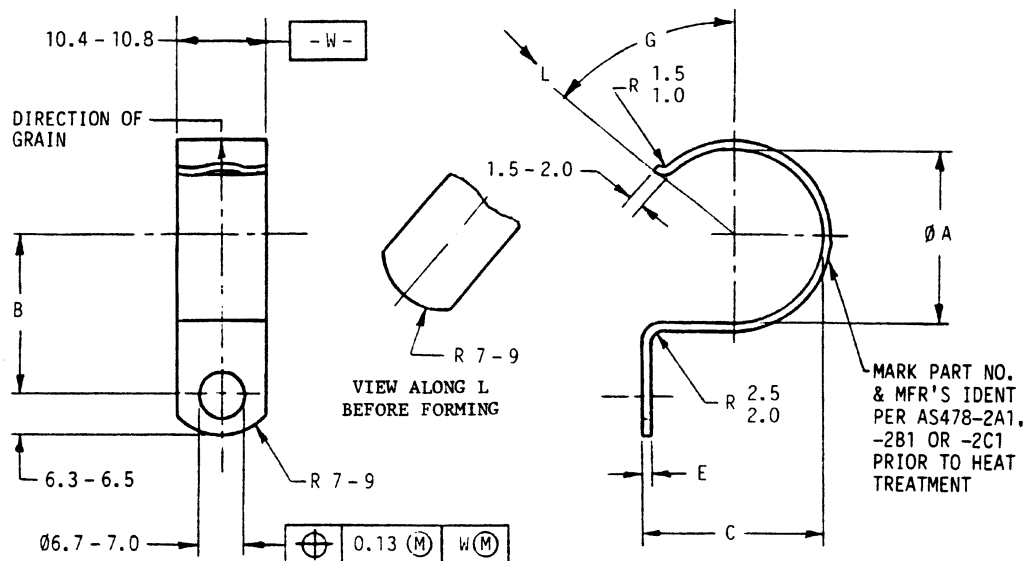


FIGURE 1

TABLE 1

PART NUMBER	NOMINAL TUBE OD METRIC mm	SUITABLE FOR TUBE INCH	ØA	B	C	E	G	APPROX MASS kg/100
MA3393-02	3.2	0.125	8.1 - 8.7	15.0 - 15.5	8.1 - 8.7	0.7 - 0.9	35° - 45°	0.220
MA3393-02	4	—	8.1 - 8.7	15.0 - 15.5	8.1 - 8.7	0.7 - 0.9	35° - 45°	0.220
MA3393-04	5	0.188	10.0 - 10.6	16.0 - 16.5	10.0 - 10.6	0.7 - 0.9	35° - 45°	0.251
MA3393-04	6	0.250	10.0 - 10.6	16.0 - 16.5	10.0 - 10.6	0.7 - 0.9	35° - 45°	0.251
MA3393-06	8	0.312	11.9 - 12.5	17.0 - 17.5	11.9 - 12.5	0.7 - 0.9	35° - 45°	0.282
MA3393-07	10	0.375	13.7 - 14.3	18.0 - 18.5	13.7 - 14.3	0.7 - 0.9	35° - 45°	0.311
MA3393-08	—	0.438	15.7 - 16.7	19.0 - 19.5	15.9 - 16.5	0.9 - 1.1	45° - 55°	0.450
MA3393-08	12	0.500	15.7 - 16.7	19.0 - 19.5	15.9 - 16.5	0.9 - 1.1	45° - 55°	0.450
MA3393-10	14	0.562	17.5 - 18.5	20.0 - 20.5	17.7 - 18.3	0.9 - 1.1	45° - 55°	0.490
MA3393-11	16	0.625	19.3 - 20.3	21.0 - 21.5	19.5 - 20.1	0.9 - 1.1	55° - 65°	0.540
MA3393-12	18	0.688	21.1 - 22.1	22.0 - 22.5	21.3 - 21.9	0.9 - 1.1	55° - 65°	0.580
MA3393-13	20	0.750	23.0 - 24.0	23.0 - 23.5	23.2 - 23.8	0.9 - 1.1	55° - 65°	0.620
MA3393-14	22	0.875	24.6 - 25.6	23.5 - 24.0	24.8 - 25.4	0.9 - 1.1	55° - 65°	0.657
MA3393-15	25	1.000	27.3 - 28.3	25.0 - 25.5	27.5 - 28.1	0.9 - 1.1	55° - 65°	0.717
MA3393-16	30	1.125	32.3 - 33.3	27.5 - 28.0	32.5 - 33.1	0.9 - 1.1	55° - 65°	0.825
MA3393-17	32	1.250	34.3 - 35.3	28.5 - 29.0	34.5 - 35.1	0.9 - 1.1	55° - 65°	0.870
MA3393-18	40	1.500	42.3 - 43.3	32.5 - 33.0	42.5 - 43.1	0.9 - 1.1	55° - 65°	0.991



METRIC AEROSPACE STANDARD

CLIP - SPRING, TENSION, OUTER
6.7 MM BOLT HOLE, AMS 5525, METRIC

MA3393
SHEET 1 OF 2

REV.



Documents

Document Sharing Hub