

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	SAE MA3421		FEDERAL SUPPLY CLASS 5310	
	RATIONALE THIS NONCURRENT STANDARD HAS BEEN STABILIZED. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.			
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/MA3421B THIRD ANGLE PROJECTION 			ISSUED 1985-12 NONCURRENT 1996-11 REAFFIRMED 2001-09 REVISED 2007-09 STABILIZED 2013-03	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: NONE		
SAE Aerospace An SAE International Group		METRIC AEROSPACE STANDARD NUT, PLAIN HEX - DRLD, UNS G87400, CADMIUM PLATE, MJ THREAD, METRIC		SAE MA3421 REV. B

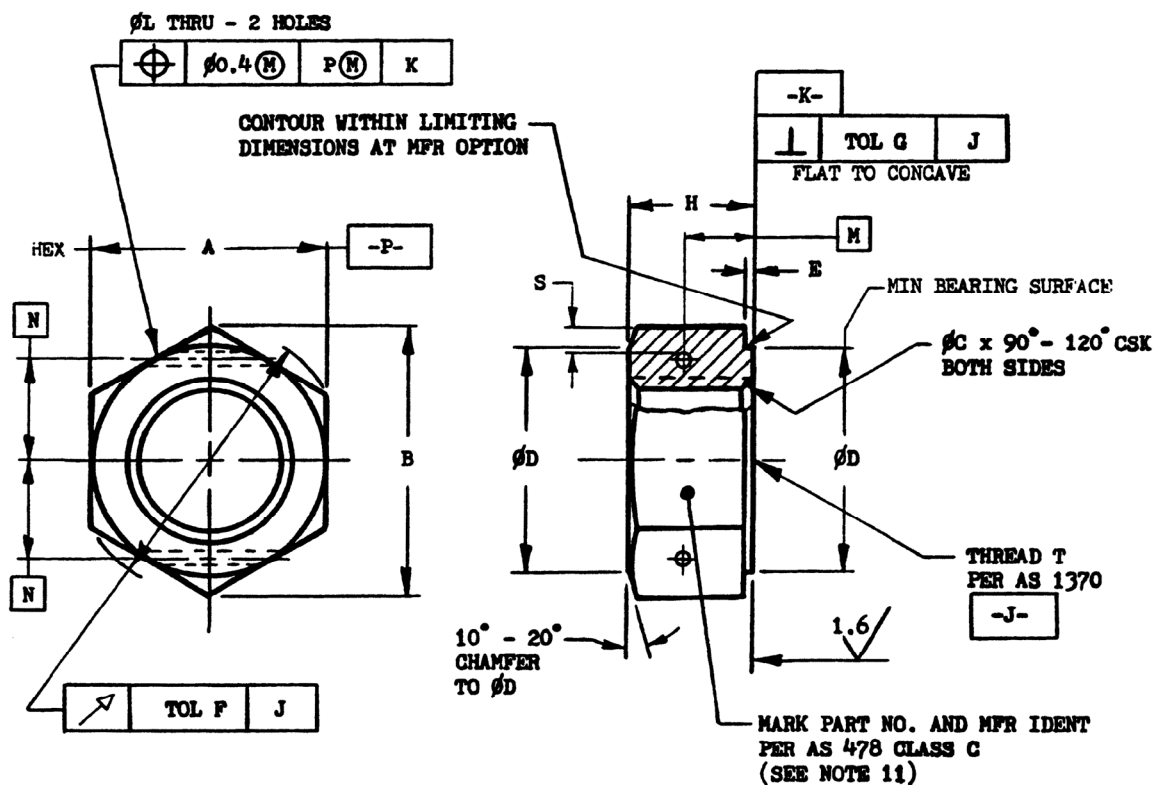


TABLE I. DIMENSIONS

PART NO.	THREAD T	A	B MIN	C	D MIN
MA3421-05	MJ5 x 0.8-4H6H	8.78 - 9.00	9.8	5.2 - 5.8	8.3
MA3421-06	MJ6 x 1-4H5H	10.73 - 11.00	12.0	6.3 - 7.1	10.2
MA3421-07	MJ7 x 1-4H5H	11.73 - 12.00	13.2	7.3 - 8.1	11.2
MA3421-08	MJ8 x 1-4H5H	13.73 - 14.00	15.5	8.3 - 9.1	13.2
MA3421-10	MJ10 x 1.25-4H5H	16.73 - 17.00	18.9	10.3 - 11.1	16.0
MA3421-12	MJ12 x 1.25-4H5H	18.67 - 19.00	21.1	12.3 - 13.1	18.0
MA3421-14	MJ14 x 1.5-4H5H	21.67 - 22.00	24.5	14.4 - 15.2	21.0
MA3421-16	MJ16 x 1.5-4H5H	23.67 - 24.00	26.8	16.4 - 17.2	23.0
MA3421-18	MJ18 x 1.5-4H5H	26.67 - 27.00	30.2	18.4 - 19.2	26.0
MA3421-20	MJ20 x 1.5-4H5H	29.67 - 30.00	33.6	20.4 - 21.2	29.0

1/ TOLERANCE GRADES TO ANSI B4.2 - 1978