

SEMI G90-0811 (Reapproved 0823) SPECIFICATION FOR 300 mm WAFER COIN-STACK TYPE SHIPPING CONTAINER USED FOR TEST AND PACKAGING PROCESSES

This Standard was technically approved by the 3D Packaging and Integration Global Technical Committee.
This edition was approved for publication by the global Audits and Reviews Subcommittee on July 7, 2023.
Available at www.semiviews.org and www.semi.org in August 2023; originally published August 2011;
previously published March 2018.

NOTICE: The section symbol (§) is used to reference a numbered section, paragraph, or header and all subordinate paragraphs, headers, and embedded material (i.e., EXCEPTIONs, lists) therein. The paragraph symbol (§) is used to reference a particular numbered paragraph and embedded material therein. When duplicated (i.e., §§ and §§§) the symbols are used to reference more than one section or paragraph, respectively.

NOTICE: Paragraphs entitled ‘NOTE:’ are not an official part of this Standard or Safety Guideline and are not intended to modify or supersede the official Standard or Safety Guideline. These have been supplied by the global technical committee to enhance the usage of the Standard or Safety Guideline.

1 Purpose

1.1 The purpose of this Standard is to standardize the specifications for 300 mm wafer coin-stack type shipping container used for test and packaging processes for wafers.

2 Scope

2.1 This Specification defines the dimensions of container (refer to §5.1.1) and requirements for securing the interface between container and processing equipment or wafer transportation equipment.

2.2 This Standard specifies the requirements for wafer spacers used for separation of wafers and for a cushion material used for wafer protection.

2.3 This Standard specifies the electrical characteristics and requirements for hazardous substance for the material of container.

NOTICE: SEMI Standards and Safety Guidelines do not purport to address all safety issues associated with their use. It is the responsibility of the users of the documents to establish appropriate safety and health practices, and determine the applicability of regulatory or other limitations prior to use.

3 Limitations

3.1 This Specification does not specify the cleanliness level of container.

4 Referenced Standards and Documents

4.1 SEMI Standards and Safety Guidelines

SEMI G59 — Test Method for Measurement of Ionic Contamination on Leadframe Interleafing and the Contamination Transferred from the Interleafing to the Leadframes

4.2 IEC® Standards¹

IEC 60093 — Methods of Test for Volume Resistivity and Surface Resistivity of Solid Electrical Insulating Materials

4.3 Other Documents

1994/62/EC — Packaging and Packaging Waste²

NOTICE: Unless otherwise indicated, all documents cited shall be the latest published versions.

¹ International Electrotechnical Commission, 3 rue de Varembe, Case Postale 131, CH-1211 Geneva 20, Switzerland; Telephone: +41.22.919.02.11, <http://www.iec.ch>. IEC trademark is owned by International Electrotechnical Commission.

² European Community Directive, *Official Journal of the European Union*, February 13, 2003 Available for downloading from: <http://164.36.164.20/sustainability/pdfs/finalrohs.pdf>

5 Terminology

5.1 Definitions

5.1.1 *coin-stack type shipping container ('container')* — a container in which wafers are horizontally stored for shipment.

5.1.2 *container main body ('main body')* — bottom material on which wafers and other materials are stacked.

5.1.3 *container lid ('lid')* — a material used to prevent the wafers from jumping out of main body and from being contaminated.

5.1.4 *cushion material ('cushion')* — an in-between material inserted main body, wafers, and lid.

5.1.5 *wafer retaining wall of main body ('wafer retaining wall')* — a circular wall located on main body in order to retain the wafers placed on main body.

5.1.6 *wafer spacer ('spacer')* — a material inserted between the adjacent wafers to prevent damage caused by friction.

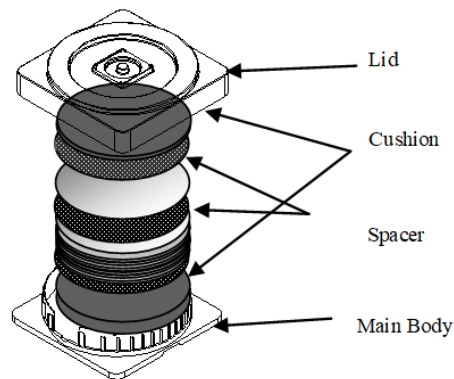


Figure 1
Composition of Container

6 Requirements

6.1 *Composition of Container* — As illustrated in Figure 1, container shall be composed of main body, lid, cushions, and spacers.

6.2 Dimensions of Container

6.2.1 Maximum height of container shall be 90 mm when container is fully assembled.

6.2.2 The dimensions of main body shall be as shown in Figure 2 and Table 1.

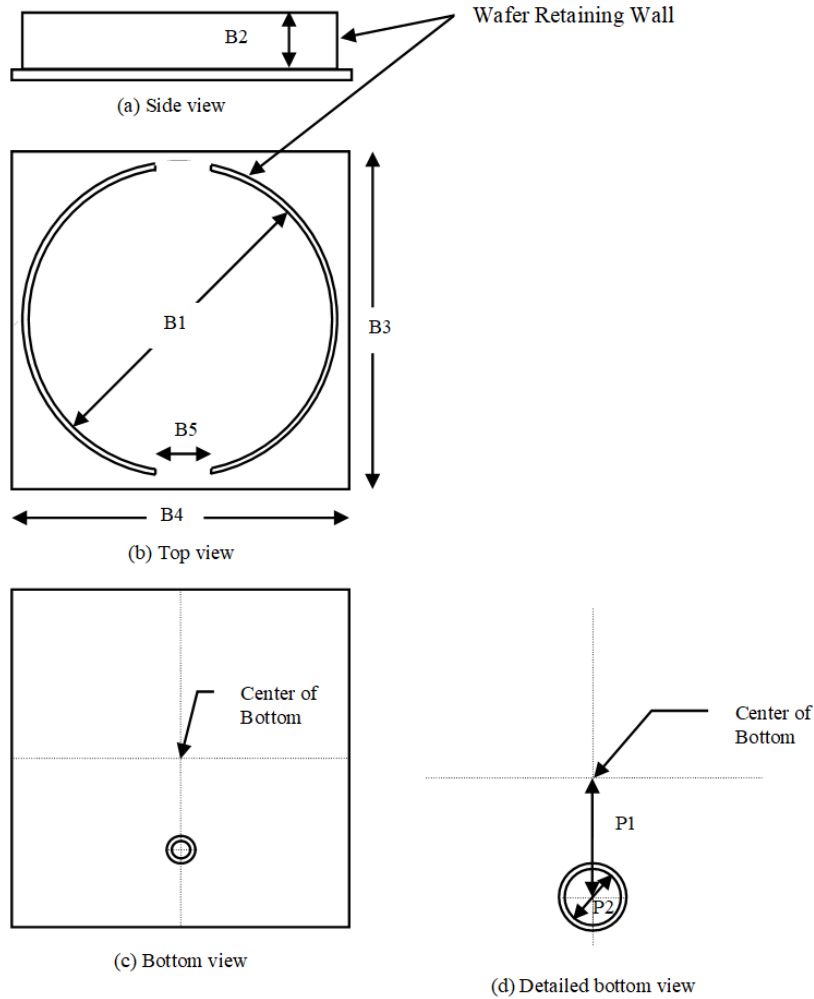


Figure 2
Main Body

6.2.3 A hole for positioning pin shall be provided at location shown in Figure 2 (d) so that the container can be positioned on the processing equipment by engagement with a pin of the equipment.

Table 1 Dimensions of Main Body

Location	Description	Dimension
B1	Inside diameter of wafer retaining wall	302 to 305 mm
B2	Height of wafer retaining wall	Not specified
B3	Outer dimension (vertical)	Maximum 328 mm (328 mm is recommended)
B4	Outer dimension (horizontal)	Maximum 328 mm (328 mm is recommended)
B5	Width of opening space in wafer retaining wall	75 to 80 mm
P1	Location of the hole from the center of bottom	87.5 mm $\pm$ 0.3 mm
P2	Diameter of hole for positioning pin	16.0 mm

6.2.4 The dimension of lid shall be as shown in Figure 3 and Table 2.