
SMPTE STABLE DOCUMENT



The attached SMPTE Engineering Document has been declared “Stable” by the controlling Technology Committee.

The SMPTE Operations Manual for Standards states:

A document should be stabilized if it is believed to be substantially correct, does not contain harmful or misleading recommendations, may still be relevant to equipment or practices in use, is stable, but does not represent current technology, and need not be subject to future reviews.

A Stable document shall still be made available and offered for sale by the Society, but it shall be prefaced by a cover page explaining its current status.

At any time, a Technology Committee may revise, amend, or otherwise initiate a new Project on a Stable document.

A Stable document is “In Force”, and not deprecated or withdrawn.

*** * * * ***

Note:

SMPTE “Stable” documents were previously described as “Archived” and the attached document may be marked as “Archived”. The status of a SMPTE document described as “Archived” is exactly as described above for a “Stable” document.


Stable documents may not adhere to the latest style and format of SMPTE documents, or to current usage of normative language. Suitable care should be taken in interpretation.

SMPTE RECOMMENDED PRACTICE

RP 86-1991

Revision of RP 86-1985

Video Record Parameters for 1-in Type C Helical-Scan Television Tape Recording



Page 1 of 2 pages

1 Scope

This practice specifies parameters of the recorded information essential to the interchange of 1-in type C helical-scan television tape recordings of the 525/60 monochrome or NTSC color systems. The parameters include video preemphasis characteristics, recorded carrier frequencies, and record-current frequency response.

2 Signal processing

2.1 A signal processing system consisting of elements specified by this practice will contain, in order of signal flow, the following elements:

2.1.1 A means to modify the burst amplitude

2.1.2 A video preemphasis network

2.1.3 A linear frequency-modulator having constant deviation with respect to modulating frequencies

2.1.4 An amplifier of the frequency-modulated carrier to provide alternating current drive to the video and sync record heads

3 Burst amplitude

A means shall be used to increase the burst amplitude of the signal to be recorded by $6.0 \text{ dB} \pm 0.1 \text{ dB}$ with respect to the video and sync portion of the composite video waveform. Phase of the burst shall be maintained to within $\pm 1^\circ$.

4 Preemphasis

4.1 Preemphasis is defined by the frequency and phase characteristics of a network such as

are shown in figure 1. Accuracy of the preemphasis time constants shall be maintained by including source and load impedances (not shown) in calculation of circuit values.

4.2 Time-constant values specifying the preemphasis networks are:

Time constant $t_1 = 240 \text{ ns}$

Time constant $t_2 = 600 \text{ ns}$

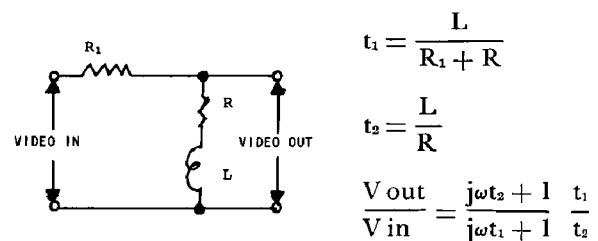


Figure 1 – Frequency and phase characteristics

5 Recorded carrier frequencies

Carrier frequencies corresponding to reference video levels shall be:

Peak-white	$10.00 \text{ MHz} \pm 0.05 \text{ MHz}$
Blanking	$7.90 \text{ MHz} \pm 0.05 \text{ MHz}$
Sync-tip	7.06 MHz nom

6 Record head current

6.1 Amplitude of the record current shall be such that a maximum tape-flux level is produced when