


SMPTE STANDARD

for Motion-Picture Equipment (8-mmType S) — Projection Reels — 75-mm Diameter



Page 1 of 4 pages

1 Scope

This standard specifies the dimensions of 8-mm type S motion-picture projection reels of 75-mm (2.95-in) diameter with a nominal film capacity of 15 m (50 ft) generally used for returning the film from the processing laboratory. The reels fit reel-to-reel equipment and are interchangeable in projection cassettes.

2 Dimensions

2.1 The dimensions shall be as given in the figures and tables.

2.2 The dimensions shall apply regardless of the material (generally plastic) used for construction.

2.3 The reel shall be designed with at least one solid flange (see figure 1), with the exception of the hub area. By definition, the solid flange should not contain openings such as thread-up slots.

2.4 Film attachment shall be provided by a slot in the reel hub, and a minimum cutout in the flange opposite the solid flange shall be provided for each access to the film end. In order to secure the end of the film to the reel for automatic rewinding, a means of film retention, such as a special retention plug or clip, shall be provided (see dimensions S and T in figure 1).

2.4.1 For reel-to-reel operation, the retention means shall not protrude beyond dimensions O + J + O. For projection cassette operation, if a plug or clip is used, it shall not protrude beyond

dimensions Q, R₄, and R₅ and/or W, R₆, and R₇ in figure 1.

2.4.2 When the retention means is utilized, it shall retain a polyester film of 0.1 mm (0.004 in) thickness when a tension of 5 N (18 oz-f) is applied in a radial direction.

2.5 The rings defined by dimensions F, G, and O are guiding means for horizontal operation of the reel.

2.6 Maximum lateral and radial runouts are given in figure 2 and table 2.

2.6.1 The primary datum reference plane of rotation is defined with the surface of a flat 25.0-mm (0.98-in) diameter support which is centered on the spindle hole datum axis A. The reference surface makes contact with the reel in the minimum I-diameter area. The datum axis, which is perpendicular to the primary datum reference plane of rotation, does not necessarily coincide with the axis derived from the center of the spindle holes.

2.6.2 Dimensions U₁, U₂, U₃, and U₄ are measured at the periphery of the flanges and are the allowable lateral distances from the datum reference plane when the reel is rotated on a test spindle.

2.6.3 Dimensions V₁ and V₂ specify the radial runout of the flanges and hub, respectively. These dimensions exceed dimensions M and E by 0.5 mm (0.02 in) to allow for eccentricity of the spindle holes, hub, and flanges.

CAUTION NOTICE: This Standard may be revised or withdrawn at any time. The procedures of the Standard Developer require that action be taken to reaffirm, revise, or withdraw this standard no later than five years from the date of publication. Purchasers of standards may receive current information on all standards by calling or writing the Standard Developer. Printed in USA.

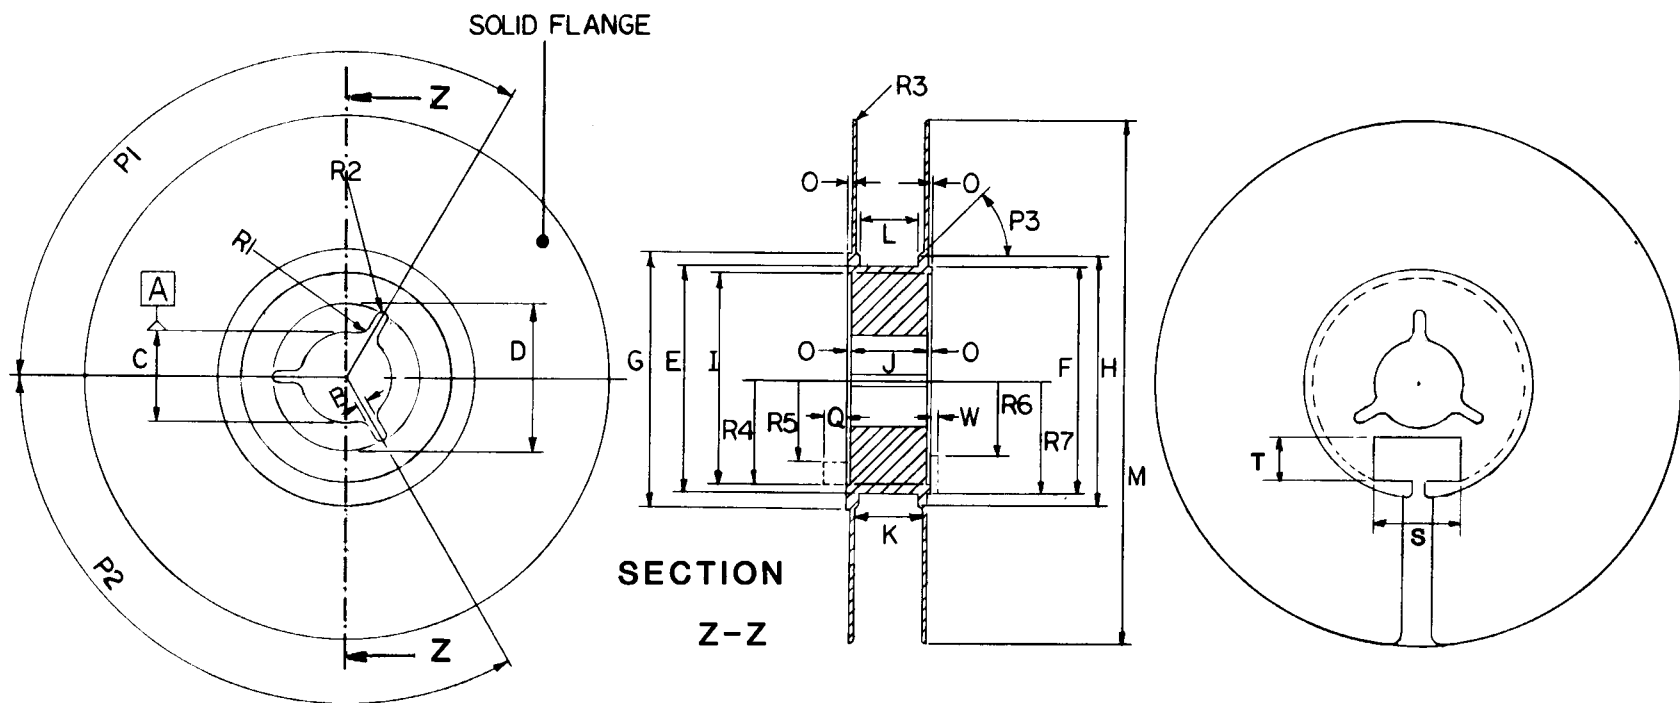


Figure 1 – Reel dimensions