

SMPTE STANDARD

Material Exchange Format — Mapping JPEG 2000 Codestreams into the MXF Generic Container



Page 1 of 24

Table of Contents	Page
Foreword	2
Intellectual Property	2
Introduction	2
1 Scope	3
2 Conformance Notation	3
3 Normative References	4
4 Glossary of Acronyms, Terms and Data Types	4
5 JPEG 2000 Mappings	4
5.1 General	4
5.2 JPEG 2000 Coding Summary (Informative)	5
5.3 High-Throughput JPEG 2000 (HTJ2K) Coding Summary (Informative)	5
5.4 Application in the MXF Generic Container	5
5.5 "FU" Undefined Frame-based wrapping and "P1" Progressive Frame-based wrapping	5
5.6 "I1" Interlaced Frame Wrapping, 1 Field per KLV Element	7
5.7 "I2" Interlaced Frame Wrapping, 2 Fields per KLV Element	7
5.8 "F1" Field Wrapping, 1 field per KLV Element	8
5.9 "Cn" Clip-based wrapping	8
6 Key-length-value coding	9
6.1 JPEG 2000 Picture Element	9
6.2 Essence Container UL	11
6.3 Picture Essence Coding Labels	12
7 Application Issues	13
7.1 General	13
7.2 Application of the KAG and the KLV Fill Item	13
7.3 Index Table Usage	13
7.4 Operational Pattern Usage	14
7.5 Mapping Track Numbers to Generic Container Elements	14
7.6 Essence Container Partitions	14
8 Essence Descriptors	14
8.1 File Descriptor Sets	14
8.2 JPEG 2000 Picture Sub-Descriptor	15
Annex A JPEG 2000 Coding of Television Signals (Normative)	20
Annex B Illustration of the JPEG 2000 Picture Sub-Descriptor (Informative)	22
Bibliography (Informative)	24

Foreword

SMPTE (the Society of Motion Picture and Television Engineers) is an internationally-recognized standards developing organization. Headquartered and incorporated in the United States of America, SMPTE has members in over 80 countries on six continents. SMPTE's Engineering Documents, including Standards, Recommended Practices, and Engineering Guidelines, are prepared by SMPTE's Technology Committees. Participation in these Committees is open to all with a bona fide interest in their work. SMPTE cooperates closely with other standards-developing organizations, including ISO, IEC and ITU.

SMPTE Engineering Documents are drafted in accordance with the rules given in its Standards Operations Manual. This SMPTE Engineering Document was prepared by Technology Committee 31FS.

Intellectual Property

At the time of publication no notice had been received by SMPTE claiming patent rights essential to the implementation of this Engineering Document. However, attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. SMPTE shall not be held responsible for identifying any or all such patent rights.

Introduction

This section is entirely informative and does not form an integral part of this Engineering Document.

This standard maps JPEG 2000 codestreams, which contain coded still pictures, into the MXF generic container. JPEG 2000 is a picture-by-picture coding scheme where each picture is entirely independent and can be extracted as an independent entity. However, the codestreams can be simply concatenated to form a sequence of compressed pictures.

This standard maps the JPEG 2000 codestream as either frame-wrapped where each JPEG 2000 codestream is individually mapped into a frame or clip-wrapped where a sequence of JPEG 2000 codestreams is mapped into a clip. This standard defines the KLV coding, the essence container and compression label values and the essence descriptor.

This document does not specify mappings for JPEG 2000 file formats, such as the JP2 file format defined in ISO/IEC 15444-1 Annex I.

1 Scope

JPEG 2000 is a picture-by-picture compression coding defined by ISO/IEC 15444-1 and used for both individual pictures and picture sequences. This standard specifies the mapping of JPEG 2000 codestreams conforming to ISO/IEC 15444-1 and ISO/IEC 15444-15 into a picture essence track of the MXF generic container in both frame-wrapped and clip-wrapped forms.

The MXF generic container is the native essence container of the material exchange format (MXF) file body. The MXF generic container is defined for the interchange of streamable audio-visual material.

This standard defines the data structure at the signal interfaces of networks or storage media. This standard does not define internal storage formats for MXF compliant devices.

2 Conformance Notation

Normative text is text that describes elements of the design that are indispensable or contains the conformance language keywords: "shall", "should", or "may". Informative text is text that is potentially helpful to the user, but not indispensable, and can be removed, changed, or added editorially without affecting interoperability. Informative text does not contain any conformance keywords.

All text in this document is, by default, normative, except: the Introduction, any section explicitly labeled as "Informative" or individual paragraphs that start with "Note:"

The keywords "shall" and "shall not" indicate requirements strictly to be followed in order to conform to the document and from which no deviation is permitted.

The keywords, "should" and "should not" indicate that, among several possibilities, one is recommended as particularly suitable, without mentioning or excluding others; or that a certain course of action is preferred but not necessarily required; or that (in the negative form) a certain possibility or course of action is deprecated but not prohibited.

The keywords "may" and "need not" indicate courses of action permissible within the limits of the document.

The keyword "reserved" indicates a provision that is not defined at this time, shall not be used, and may be defined in the future. The keyword "forbidden" indicates "reserved" and in addition indicates that the provision will never be defined in the future.

A conformant implementation according to this document is one that includes all mandatory provisions ("shall") and, if implemented, all recommended provisions ("should") as described. A conformant implementation need not implement optional provisions ("may") and need not implement them as described.

Unless otherwise specified, the order of precedence of the types of normative information in this document shall be as follows: Normative prose shall be the authoritative definition; Tables shall be next; followed by formal languages; then figures; and then any other language forms.

3 Normative References

The following standards contain provisions that, through reference in this text, constitute provisions of this Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this recommended practice are encouraged to investigate the possibility of applying the most recent edition of the standards indicated below.

SMPTE ST 377-1:2011, Material Exchange Format (MXF) — File Format Specification

Amendment 1:2012 to SMPTE ST 377-1:2011

Amendment 2:2012 to SMPTE ST 377-1:2011

SMPTE ST 379-1:2009, Material Exchange Format (MXF) — MXF Generic Container

SMPTE ST 379-2:2010, Television — Material Exchange Format (MXF) — MXF Constrained Generic Container

SMPTE ST 400:2012, SMPTE Labels Structure

ISO/IEC 15444-1:—, Information Technology — JPEG 2000 Image Coding System — Part 1: Core Coding System

ISO/IEC 15444-15:—, Information Technology — JPEG 2000 Image Coding System — Part 15: High-Throughput JPEG 2000

4 Glossary of Acronyms, Terms and Data Types

For the purposes of this document, the terms and definitions given in SMPTE ST 377-1, SMPTE ST 379-1, SMPTE ST 379-2, ISO/IEC 15444-1, and ISO/IEC 15444-15 apply.

In case of conflict, the terms and definitions of SMPTE ST 377-1 shall take precedence.

5 JPEG 2000 Mappings

5.1 General

The MXF generic container (GC) is fully described in SMPTE ST 379-1 and SMPTE ST 379-2.

This standard specifies the mapping of JPEG 2000 codestreams into the JPEG 2000 Picture Element that may be used in the picture item of the MXF GC. The JPEG 2000 Picture Element may contain either individual JPEG 2000 codestreams using frame-wrapping or a sequence of JPEG 2000 codestreams using clip-wrapping.

This standard specifies the key, the length, and the value fields of the JPEG 2000 Picture Element. This standard also defines the essence container and compression label values and the essence descriptor.

5.2 JPEG 2000 Coding Summary (Informative)

JPEG 2000 is a picture-by-picture coding scheme, so each picture is independently coded and can be extracted as an independent entity. However, sequences of JPEG 2000 coded bitstreams can be simply concatenated to form a sequence of compressed images.

A JPEG 2000 coded bitstream for a single compressed image is defined as a JPEG 2000 codestream, which is defined by a SOC marker that identifies the start of the JPEG 2000 codestream and an EOC marker that identifies the end of the JPEG 2000 codestream. In between the SOC and EOC markers are other markers for identification of key parts of the codestream together with the compressed image data. The syntax of the JPEG 2000 codestream is defined in ISO/IEC 15444-1. A JPEG 2000 codestream can contain marker segments not defined in ISO/IEC 15444-1, including those specified in ISO/IEC 15444-15.

5.3 High-Throughput JPEG 2000 (HTJ2K) Coding Summary (Informative)

ISO/IEC 15444-15 specifies a High-Throughput (HT) block coding algorithm that can be used in place of the block coding algorithm of Rec. ITU-T T.800 | ISO/IEC 15444-1. The HT block coding algorithm increases decoding and encoding throughput and allows mathematically lossless transcoding to and from the block coding algorithm of Rec. ITU-T T.800 | ISO/IEC 15444-1. This is achieved at the expense of some loss in coding efficiency and substantial elimination of quality scalability.

5.4 Application in the MXF Generic Container

This mapping shall use the MXF generic container in either the frame-based wrapping or clip-based wrapping mode defined in SMPTE ST 379-1 and SMPTE ST 379-2.

The following wrapping modes are defined:

- "FU" Undefined Frame-based wrapping
- "P1" Progressive Frame-based wrapping
- "I1" Interlaced Frame Wrapping, 1 field per KLV Element
- "I2" Interlaced Frame Wrapping, 2 fields per KLV Element
- "F1" Field Wrapping, 1 field per KLV Element
- "Cn" Clip-based wrapping

These are described in the sections immediately below.

5.5 "FU" Undefined Frame-based wrapping and "P1" Progressive Frame-based wrapping

The essence container shall be frame-wrapped.

As illustrated in Figure 1, each Content Package shall contain a Picture Item that consists of a single JPEG 2000 Picture Element (see Section 6.1). A system item is optional in this essence container.

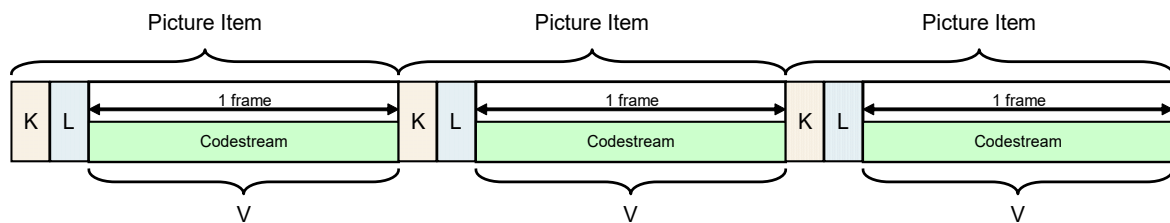


Figure 1 – "FU" Undefined Frame-based wrapping and "P1" Progressive Frame-based wrapping

Progressive-scanned frames shall be labelled with Essence Container Label "P1", as specified in Section 6.1.3.7.

Essence Container Label "FU" is prohibited in files compliant with this standard.

NOTE 1 Earlier versions of this standard required the use of the Essence Container Label "FU" (see Section 6.1.3.2), however insufficient metadata was specified to determine if the pictures were progressive-scanned or interlace-scanned. The picture scanning parameters are inferred circumstantially in such legacy material. The "FU" mode is deprecated.

This essence container may contain other interleaved essence elements, as illustrated in Figure 2. These other essence elements shall be as defined by this or other MXF mapping standards. All essence elements shall be frame wrapped. For simplicity of operation, each frame should contain essence elements that are independent of other frames. Interleaved essence elements that are inter-frame coded are not prohibited, but their inclusion might impact the performance of codecs. All essence elements in each interleaved frame should be time coincident within the limits of human recognition.

NOTE 2 The term 'frame-based wrapping' is defined by SMPTE ST 379-1 and SMPTE ST 379-2 as the individual wrapping of one or more content packages each having a basic sample unit. This basic sample unit is defined by the JPEG 2000 codestream and in television systems, and can be the result of coding fields from an interlaced scanned picture or frames from a progressively scanned picture.

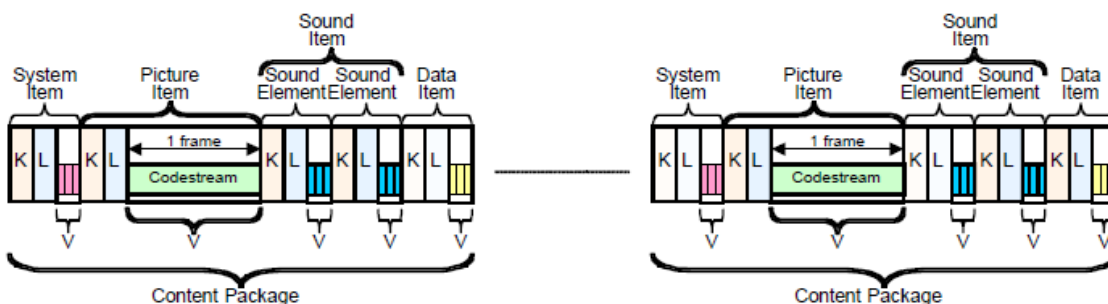


Figure 2 – Frame-based wrapping of interleaved items and elements in the generic container

NOTE 3 Interleaving essence elements sometimes involve timing tolerances whose specification is beyond the scope of this standard. However, the design of the frame-based interleaved MXF generic container is predicated on the concept of essentially time-aligned essence elements within each content package.

Individual applications may define the JPEG 2000 Picture Element as the only element present in each content package.

5.6 "I1" Interlaced Frame Wrapping, 1 Field per KLV Element

The essence container shall be frame-wrapped.

As illustrated in Figure 3, each Content Package corresponds to a single interlaced picture, and shall contain a Picture Item with two JPEG 2000 Picture Elements (see Section 6.1), each corresponding to a single interlaced picture field.

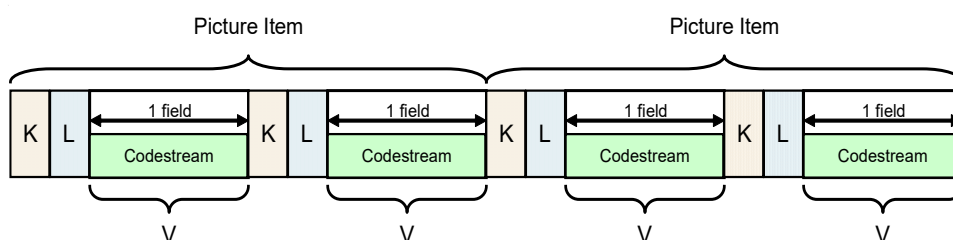


Figure 3 – "I1" Interlace Frame wrapping, 1 field per KLV element

The first JPEG 2000 Picture Element shall contain the first field of the interlaced picture. The two JPEG 2000 Picture Elements may be separated by a KLV Fill Item.

This essence container may contain other interleaved essence elements.

5.7 "I2" Interlaced Frame Wrapping, 2 Fields per KLV Element

The essence container shall be frame-wrapped.

As illustrated in Figure 4, each Content Package corresponds to a single interlaced picture, and shall contain a Picture Item with one JPEG 2000 Picture Element containing two concatenated JPEG 2000 codestreams, each representing a single picture field.

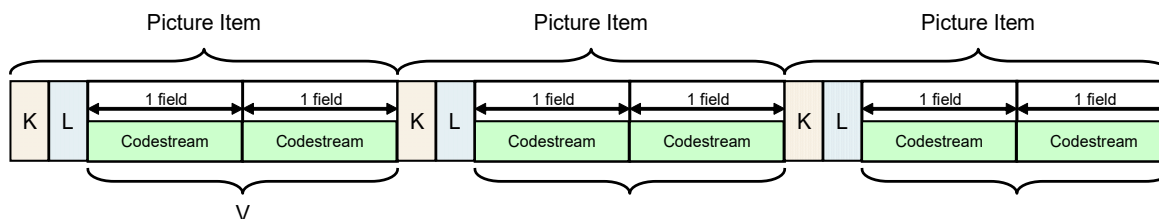


Figure 4 – "I2" Interlace Frame wrapping, 2 fields per KLV element.

This essence container may contain other interleaved essence elements.

5.8 "F1" Field Wrapping, 1 field per KLV Element

The essence container shall be frame-wrapped.

As illustrated in Figure 5, each Content Package corresponds to a single field of an interlaced picture, and shall contain a Picture Item with one JPEG 2000 Picture Element (see Section 6.1) corresponding to the single picture field.

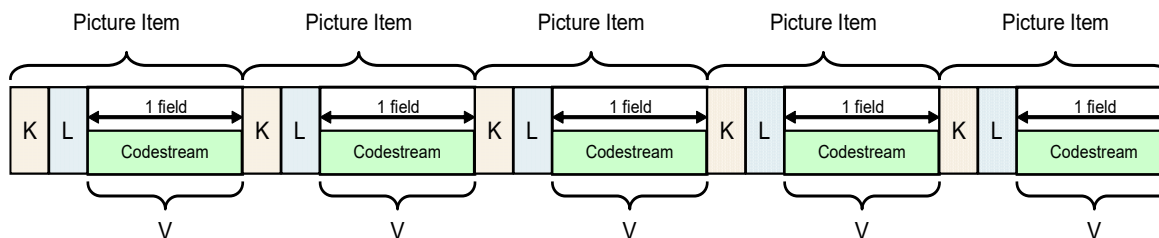


Figure 5 – "F1" Field wrapping, 1 field per KLV element

The JPEG 2000 compressed images may be interleaved with other essence components in the frame-wrapped essence container.

5.9 "Cn" Clip-based wrapping

The essence container shall be clip-wrapped.

As illustrated in Figure 6, the Content Package shall contain a Picture Item with a single JPEG2000 Picture Element (see Section 6.1) whose value is a sequence of concatenated JPEG 2000 codestreams.