



UL 1026

STANDARD FOR SAFETY

Household Electric Cooking and Food
Serving Appliances

UL Standard for Safety for Household Electric Cooking and Food Serving Appliances, UL 1026

Sixth Edition, Dated January 27, 2012

Summary of Topics

This revision of ANSI/UL 1026 dated September 29, 2023 includes the following changes in requirements:

– Addition UL 969A as an alternative to existing permanency of marking requirements for cord tags; [62.1](#), [62.6](#), [67.25](#), [67.27](#), [69.12](#) and [SB9.1](#).

– Clarification of Strain Relief Test Requirement; [10.2.2.5](#) and [10.2.2.6](#)

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The new and revised requirements are substantially in accordance with Proposal(s) on this subject dated March 10, 2023 and August 25, 2023.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

JANUARY 27, 2012
(Title Page Reprinted: September 29, 2023)



ANSI/UL 1026-2023

1

UL 1026

Standard for Household Electric Cooking and Food Serving Appliances

Prior to the first edition, the requirements for the products covered by this Standard were included in the Standard for Electric Heating Appliances, UL 499.

First Edition – November, 1975
Second Edition – March, 1981
Third Edition – September, 1988
Fourth Edition – July, 1995
Fifth Edition – January, 2007

Sixth Edition

January 27, 2012

This ANSI/UL Standard for Safety consists of the Sixth edition including revisions through September 29, 2023.

The most recent designation of ANSI/UL 1026 as an American National Standard (ANSI) occurred on September 29, 2023. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

COPYRIGHT © 2023 ULSE INC.

No Text on This Page

CONTENTS

INTRODUCTION

1	Scope	7
2	Units of Measurement	7
3	Undated References	7
4	Glossary	7

CONSTRUCTION

5	General	9
6	Frame and Enclosure	10
7	Assembly	17
8	Stability	18
9	Corrosion Protection	18
10	Supply Connections	18
	10.1 Permanently connected appliances	18
	10.2 Cord-connected appliances	20
11	Current-Carrying Parts	27
12	Internal Wiring	27
	12.1 General	27
	12.2 Protection of wiring	28
	12.3 Splices	28
	12.4 Separation of circuits	29
13	Heating Elements	31
14	Electrical Insulation	31
	14.7 Film-coated wire (magnet wire)	32
15	Thermal Insulation	32
16	Motors and Transformers	33
17	Motor-Running Overcurrent (Overload) Protection	34
18	General (Short-Circuit and Ground-Fault) Overcurrent Protection	35
19	Overcurrent and Over-Temperature Protection	35
20	Lampholders	36
21	Power-On Indicator – Toaster Ovens, Toaster Oven/Broilers	36
22	Switches	37
23	Dual Voltage Appliance	39
24	Automatic Controls and Control Circuits	40
25	Electromechanical and Electronic Controls	41
26	Controls – End Product Test Parameters	41
	26.1 General	41
	26.2 Auxiliary controls	41
	26.3 Operating controls (regulating controls)	42
	26.4 Protective controls (limiting controls)	43
	26.5 Controls using a temperature sensing device	45
27	Power Output Control Circuits	45
28	Overheating Protection	47
29	Spacings	48
30	Spacings On Printed-Wiring Boards	49
31	Grounding	50
32	Pressure Vessels and Parts Subject to Pressure	51
33	Protection Against Personal Injury	53
34	Ground-Fault, Arc-Fault, and Leakage Current Detectors/Interrupters	54
35	Surge Protective Device	55

PERFORMANCE

36	General	55
37	Power Input Test	55
38	Leakage Current Tests.....	55
39	Operational Tests	58
40	Calibration of Probe-Type Temperature Controls Tests	58
	40.1 Ovens.....	58
	40.2 Other appliances	58
	40.3 All appliances	59
41	Normal Temperature Test.....	59
	41.1 General.....	59
	41.2 Specific test condition	66
42	Top-Front Edge Temperatures – Convection Ovens Tests.....	69
43	Tests for Insulation Resistance and Leakage Current as a Result of Moisture.....	72
44	Dielectric Voltage-Withstand Test	74
45	Mechanical Endurance Test	75
46	Broken Element Test	75
47	Push-Back Relief Test.....	75
48	Overflow Test	76
	48.1 General.....	76
	48.2 Fill	76
49	Ingress Test	76
50	Glass Window or Door Impact Test	77
51	Handle Impact Test for Slow Cookers.....	77
52	Metal Enclosure Impact Tests.....	77
53	Non-Metallic Enclosure-Fasteners Test.....	80
54	Thermal Degradation Test.....	84
54A	Oven Rack Loading Test.....	84
55	Abnormal Operation Test	85
	55.1 General.....	85
	55.2 Specific test conditions.....	86
56	Impact Test for Under-Cabinet and Wall-Mounted Appliances	91
57	Loading Test	92
58	Handle Strength Test for Slow Cookers	92
59	Temperature Probe Insertion Test	93
60	Component Switches and Control Devices	93
	60.1 Overload.....	93
	60.2 Endurance	95
	60.3 Limited short circuit – Motor-control devices.....	97
	60.4 Toaster supplemental operating control operation time – Cord connected automatic toaster test.....	97
61	Permanence of Marking.....	97
62	Permanence of Cord Tag	98
63	Small Metal Object Heating Test.....	99

MANUFACTURING AND PRODUCTION-LINE TESTS

64	Dielectric Voltage-Withstand Test	99
65	Polarization and Grounding Continuity Tests.....	101
	65.1 Polarization test.....	101
	65.2 Continuity of grounding connection	101
	65.3 Electrical indicating device.....	101

RATINGS

66	Details	101
----	---------------	-----

MARKINGS

67	Details	101
68	Carton Marking	105

INSTRUCTION MANUAL

69	General	106
70	All Appliances	108
71	Specific Appliances	109
72	User Maintenance	111

SUPPLEMENT SA – HOUSEHOLD ELECTRIC COOKING APPLIANCES AND FOOD SERVING APPLIANCES**INTRODUCTION**

SA1	Scope	113
-----	-------------	-----

CONSTRUCTION

SA2	General	114
	SA2.1 Controls	114
	SA2.2 Separation of Circuits	114
	SA2.3 Communication and Display Devices	114
	SA2.4 Communication Conductors and Cables	115
	SA2.5 Communication Connectors	115
	SA2.6 Smart Enabled or Remote Operation	115
SA3	Functional Safety	116
SA4	Resistance to Electro-Magnetic Phenomena (Immunity)	117
SA5	Markings and Instructions	117

SUPPLEMENT SB – HOSPITALITY-USE ELECTRIC COOKING APPLIANCES

SB1	Scope	119
SB2	Assembly	119
SB3	Supply Connections	119
SB4	Grounding	119
SB5	Operating Controls	120
SB6	Power-On Indicator	120
SB7	Operation Tests	120
SB8	Markings	120
SB9	Important Safeguards	121
SB10	Important Safeguards for Specific Appliances	121
SB11	User Maintenance	123

APPENDIX A Food Color Charts

No Text on This Page

INTRODUCTION

1 Scope

1.1 These requirements cover household electric cooking and food serving appliances, rated at 250 V or less, other than those mentioned in [1.2](#), for use in ordinary locations, including appliances intended for casual and permanent outdoor use, in accordance with the National Electrical Code, NFPA 70.

1.2 These requirements do not cover household electric ranges, electrode type appliances, skillets and frying type appliances, fondues, woks, tempuras, corn poppers, coffee makers and brewing type appliances, commercial cooking appliances, microwave cooking appliances, or appliances that are covered in individual requirements that are separate from this Standard.

1.3 For the purposes of this Standard, a requirement that applies to one type of equipment is identified by a specific reference to the type of equipment involved (for example, toaster, rotisserie, or other specific appliance). In the absence of such specific reference or if the term "appliance" is employed, it is to be understood that the requirement applies to all types of equipment covered by the Standard.

1.4 These requirements do not cover slow cookers intended for outdoor use.

2 Units of Measurement

2.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

3 Undated References

3.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

4 Glossary

4.1 For the purpose of this Standard the following definitions apply.

4.2 **APPLIANCE COUPLER** – A single-outlet, female contact device for attachment to a flexible cord as part of a detachable power-supply cord to be connected to an appliance inlet (motor attachment plug).

4.3 **APPLIANCE INLET (Motor Attachment Plug)** – A male contact device mounted on an end product appliance to provide an integral blade configuration for the connection of an appliance coupler or cord connector.

4.4 **APPLIANCE (FLATIRON) PLUG** – An appliance coupler type of device having a cord guard and a slot configuration specified for use with heating or cooking appliances.

4.5 **COMPONENT** – A device or fabricated part of the appliance covered by the scope of a safety standard dedicated to the purpose. When incorporated in an appliance, equipment otherwise typically field installed (e.g. luminaire) is considered to be a component. Unless otherwise specified, materials that compose a device or fabricated part, such as thermoplastic or copper, are not considered components.

4.6 **CONTROL, AUTOMATIC ACTION** – A control in which at least one aspect is non-manual.

4.7 **CONTROL, AUXILIARY** – A device or assembly of devices that provides a functional utility, is not relied upon as an operational or protective control, and therefore is not relied upon for safety. For example,

an efficiency control not relied upon to reduce the risk of electric shock, fire, or injury to persons during normal or abnormal operation of the end product is considered an auxiliary control.

4.8 CONTROL, MANUAL – A device that requires direct human interaction to activate or rest the control.

4.9 CONTROL, OPERATING – A device or assembly of devices, the operation of which starts or regulates the end product during normal operation. For example, a thermostat, the failure of which a thermal cutout/limiter or another layer of protection would reduce the risk of electric shock, fire, or injury to persons, is considered an operating control.

4.10 CONTROL, PROTECTIVE – A device or assembly of devices, the operation of which is intended to reduce the risk of electric shock, fire or injury to persons during normal and reasonably anticipated abnormal operation of the appliance. For example, a thermal cutout/limiter, or any other control/circuit relied upon for normal and abnormal conditions, is considered a protective control. (During the testing of the protective control/circuit, the protective functions are verified under normal and single-fault conditions of the control.)

4.11 CONTROL, TYPE 1 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence has not been declared and tested under this Standard.

4.12 CONTROL, TYPE 2 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence have been declared and tested under this Standard.

4.13 CORD CONNECTOR – A female contact device wired on flexible cord for use as an extension from an outlet to make a detachable electrical connection to an attachment plug or, as an appliance coupler, to an equipment inlet.

4.14 INDUCTION HEATING APPLIANCES – Appliances that can heat at least one metallic vessel by means of eddy currents. The eddy currents are induced to the cooking vessel by the electromagnetic field of a coil.

4.15 INDUCTION HEATING SYSTEM – The inductor current waveform is created by a high-efficiency switched DC power supply and 1-2 IGBT switches. The analog to dialogue switches are driven by a microcontroller, which responds to a feedback loop that forces conditions, such as size/shape/material of cooking vessel, current, voltage or temperature, monitored by sensors to correspond to settings established by the user.

4.16 *Deleted.*

4.17 INDUCTION TABLE STOVE (HOTPLATE) – Table Stove that can heat at least one metallic vessel by means of eddy currents. The eddy currents are induced in the bottom of the vessel by the electromagnetic field of a coil.

4.18 LINE-VOLTAGE CIRCUIT – A line-voltage circuit is one involving a potential of not more than 250 V and having circuit characteristics in excess of those of a low-voltage circuit. A circuit derived from a source of supply classified as a line-voltage circuit, by connecting resistance in series with the supply circuits as a means of limiting the voltage and current, is not considered to be a low-voltage circuit as described in [4.19](#).

4.19 LOW-VOLTAGE CIRCUIT – A low-voltage circuit is one involving a potential of not more the 30 V and supplied by a primary battery, by a standard Class 2 transformer, or by an impedance that, as a unit, complies with all of the performance requirements for Class 2 transformer.

4.20 TOUCH CONTROL – Control actuated by contact or proximity of a finger, with no movement of the contact surface.

CONSTRUCTION

5 General

5.1 If the operation of an appliance involves the generation and confining under pressure of steam or other gas, consideration shall be given to the possibility of an explosion risk incident to such operation. The appliance shall not be acceptable unless its strength is adequate with respect to any explosion risk that may be involved.

5.2 A component of a product covered by this Standard shall:

- a) Comply with the requirements for that component as indicated in the individual section covering that component;
- b) Be used in accordance with its rating established for the intended conditions of use;
- c) Be used within its established use limitations or conditions of acceptability;
- d) Additionally comply with the applicable requirements of this end product standard; and
- e) Not contain mercury, unless used within a fluorescent, high intensity discharge, or neon lamp bulb.

Exception No. 1: A component of a product covered by this Standard is not required to comply with a specific component requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product;*
- b) Is superseded by a requirement in this Standard; or*
- c) Is separately investigated when forming part of another component, provided the component is used within its established ratings and limitations.*

Exception No. 2: A component complying with a component standard other than those cited in this Standard is acceptable if:

- a) The component also complies with the applicable component standard indicated in this Standard; or*
- b) The component standard:*
 - 1) Is compatible with the ampacity and overcurrent protection requirements in the National Electrical Code, NFPA 70, where appropriate;*
 - 2) Considers long-term thermal properties of polymeric insulating materials in accordance with the Standard for Polymeric Materials – Long Term Property Evaluations, UL 746B; and*
 - 3) Any use limitations of the other component standard is identified and appropriately accommodated in the end use application. For example, a component used in a household application, but intended for industrial use and complying with the relevant component standard may assume user expertise not common in household applications.*

5.3 A component that is also intended to perform other functions, such as over current protection, ground-fault circuit-interruption, surge suppression, any other similar functions, or any combination thereof, shall comply additionally with the requirements of the applicable UL standard that cover devices that provide those functions.

Exception: Where these other functions are not required for the application and not identified as part of markings, instructions, or packaging for the appliance, the additional component standard need not be applied.

5.4 A component not anticipated by the requirements of this end product standard, not specifically covered by the component standards noted in this Standard, and that involves a risk of fire, electric shock, or injury to persons, shall be additionally investigated in accordance with the applicable UL standard, and shall comply with [5.2](#) (b) – (e).

5.5 With regard to a component being additionally investigated, reference to construction and performance requirements in another UL end product standard is suitable where that standard anticipates normal and abnormal use conditions consistent with the application of this end product Standard.

6 Frame and Enclosure

6.1 The frame and enclosure of an appliance shall be sufficiently strong and rigid to resist the abuses likely to be encountered during intended service. The degree of resistance inherent in the appliance shall preclude total or partial collapse with the attendant reduction of spacings, loosening or displacement of parts, and other serious defects that alone or in combination constitute an increase in the risk of fire, electric shock, or injury.

6.2 An appliance shall be provided with an enclosure of material acceptable for the particular application, which shall house all electrical parts, except for a supply cord, and except for an open-wire-element unit as mentioned in [14.3](#) and [14.4](#), that may present a risk of fire, shock, or injury under any condition of use. If an appliance is intended for permanent connection to the power supply, the enclosure shall be provided with means for mounting in the intended manner and shall be furnished with any necessary fittings, such as brackets, hangers, or the like.

6.3 In the case of an appliance employing oil or grease in its normal cooking operation, special consideration shall be given to the need for an enclosure over the cooking compartment, and to the acceptability for the purpose of the material employed for such an enclosure.

6.4 If openings for ventilation are provided in the enclosure of an appliance or in an externally mounted component intended for permanent connection to the power supply, they shall be located so that they do not vent into concealed spaces of a building structure such as into false-ceiling space, into hollow spaces in the wall, or the like, when the appliance is installed as intended.

6.5 Among the factors that shall be considered when an enclosure is being judged for acceptability are its:

- a) Physical strength;
- b) Resistance to impact;
- c) Moisture-absorptive properties;
- d) Combustibility;
- e) Resistance to corrosion; and

- f) Resistance to distortion at temperatures to which the enclosure may be subjected under conditions of normal or abnormal use.

A nonmetallic enclosure, shall comply with the enclosure requirements in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C. A metal enclosure or enclosure part shall be tested in accordance with Metal Enclosure Impact Tests, Section [52](#), for resistance to impact.

Exception No. 1: When considering the abnormal and severe conditions tests of UL 746C, the appliance enclosure is to be subjected to the Abnormal Operation Tests of Section [55](#).

Exception No. 2: Thermoset materials need not be subjected to the relative thermal capability requirements of UL 746C. For a thermoset material operating at a temperature above its temperature rating, the 1000 hour aging test specified in [54.1](#), shall be conducted.

6.6 A thermoplastic enclosure of an appliance provided with overheating protection (Overheating Protection, Section [28](#)) need not comply with the flammability requirements of UL 746C, if a material rated HB, and possessing 60 arcs minimum resistance to high current arc ignition, and 7 second minimum resistance to hot wire ignition is employed and all enclosure parts including ribs, grills, and the like are spaced a minimum 1/2 inch (12.7 mm) from uninsulated live parts.

6.7 Cast- and sheet-metal portions of enclosure shall be no thinner than indicated in [Table 6.1](#), unless the enclosure is found to be acceptable when judged under considerations as mentioned in [6.5](#) and [6.8](#).

6.8 In addition to being considered with reference to the factors mentioned in [6.5](#), an enclosure of sheet metal shall be judged with respect to its size and shape, the thickness of metal, its acceptability for the particular application, and consideration of the intended use of the appliance.

6.9 Electrical parts of an appliance, except the radiating portion of an open-wire element of an automatic toaster, shall be so located or enclosed that protection against unintentional contact with uninsulated live parts is provided (see also [22.7](#)). Insulated motor brush caps do not require additional enclosure.

Table 6.1
Minimum acceptable thicknesses of enclosure metal

Metal	At small, flat, unreinforced surfaces and at surfaces that are reinforced by curving, ribbing, and the like (or are otherwise of a shape and/or size) to provide equivalent physical strength		At surfaces to which a wiring system is to be connected in the field		At relatively large unreinforced flat surfaces	
	Inches	(mm)	Inches	(mm)	Inches	(mm)
Die-cast	3/64	(1.2)	—	—	5/64	(2.0)
Cast malleable iron	1/16	(1.6)	—	—	3/32	(2.4)
Other cast metal	3/32	(2.4)	—	—	1/8	(3.2)
Uncoated sheet steel	0.026 ^a	(0.66 ^a)	0.032	(0.81)	0.026	(0.66)
Galvanized sheet steel	0.029 ^a	(0.74 ^a)	0.034	(0.86)	0.029	(0.74)
Nonferrous sheet metal	0.036 ^a	(0.91 ^a)	0.045	(1.14)	0.036	(0.91)

^a Thinner sheet metal may be employed if found to be acceptable when the enclosure is judged under considerations such those mentioned in [6.5](#).

6.10 The enclosure shall be constructed so that molten metal, burning insulation, flaming particles, or the like do not fall on the supporting surface.

6.11 The requirement in [6.10](#), necessitates that an enclosure bottom with an opening be provided with a barrier above or below the opening if the opening is:

a) Under a motor unless:

1) The structural parts of the motor or of the appliance provide the equivalent of such a barrier;

2) The protection provided with the motor is such that no burning insulation or molten material falls to the surface that supports the appliance when the motor is energized under each of the following fault conditions:

i) Open main winding;

ii) Open starting winding;

iii) Starting switch short-circuited; and

iv) For a permanent-split-capacitor motor the capacitor is short circuited. The short circuit is to be applied before the motor is energized and the rotor is to be blocked;

3) The motor is provided with a thermal motor protector (a protective device that is sensitive to both temperature and current) that prevents the temperature of the motor windings from becoming more than 125°C (257°F) under the maximum load under which the motor runs without causing the protector to cycle, and from becoming more than 150°C (302°F) with the rotor of the motor locked; or

4) The motor complies with the requirements for impedance-protected motors.


b) Under wiring, unless the wiring complies with the VW-1 flame test or the Vertical Flame Test described in the Reference Standard for Electrical Wires, Cables, and Flexible Cords, UL 1581.

c) Under an unenclosed switch, transformer, relay, solenoid, and the like, unless it can be shown that malfunction of the component is not likely to result in a fire.

d) Under field- and factory-made splices and overload and overcurrent protective devices.

Exception: A barrier is not required if the opening is not within the area under the component requiring a barrier as illustrated by Line D in [Figure 6.1](#).

Figure 6.1
Location and extent of barrier

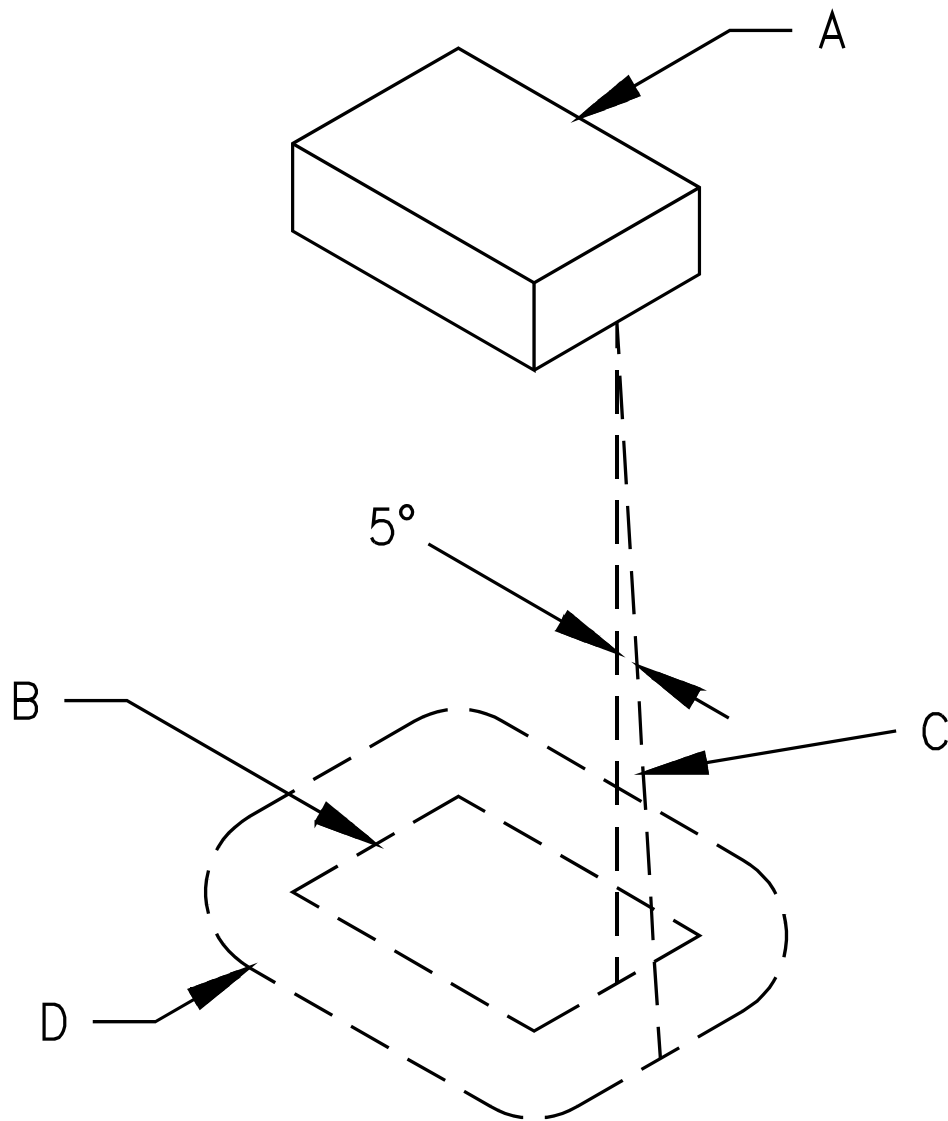

EB120A

A – Region to be shielded by barrier. This will consist of the entire component if it is not otherwise shielded and will consist of the unshielded portion of a component that is partially shielded by the component enclosure or equivalent.

B – Projection of outline of component on horizontal plane.

C – Inclined line that traces out minimum area of barrier. The line is always:

- 1) Tangent to the component;
- 2) 5 degrees from the vertical; and
- 3) So oriented that the area traced out on a horizontal plane is maximum.

D – Location (horizontal) and minimum area for barrier. The area is that included inside the line of intersection traced out by the inclined line C and the horizontal plane of the barrier.

6.12 The barrier mentioned in [6.11](#), shall be:

- a) Of metal, ceramic, or a material that is acceptable as an enclosure in accordance with [6.5](#);
- b) Horizontal; and
- c) Located as indicated in [Figure 6.1](#), and shall not have an area less than that described in [Figure 6.1](#).

6.13 An opening in the enclosure that has a minor dimension of less than 1 inch (25.4 mm) is acceptable if a probe as illustrated in [Figure 6.2](#), inserted through the opening, cannot be made to touch any uninsulated live part or film-coated wire that involves the risk of electric shock. The probe shall be applied in all possible articulated positions before, during, and after insertion.

6.14 An opening that has a minor dimension of 1 inch (25.4 mm) or more, in an enclosure, as illustrated in [Figure 6.3](#), is acceptable if, within the enclosure, there is no uninsulated live part or film-coated wire less than, R distance from the inside edge of the perimeter of the opening and X distance from the plane of the opening. T equals the enclosure thickness, R equals X minus T, and X equals five times the diameter of the largest round rod that can be inserted through the opening but not less than 6-1/16 inches (154 mm). In evaluating an opening, any barrier located within the volume is to be ignored unless it intersects the boundaries of the volume in a continuous closed line.

6.15 If a marking draws attention of the user to a hole of any size in the enclosure for the adjustment of a thermostat or for a similar activity, it shall not be possible to damage insulation or contact uninsulated live parts through the hole with a 1/16-inch-diameter rod (1.6 mm).

6.16 During the examination of an appliance in connection with the requirements in [6.9](#) and [6.13](#) – [6.15](#), any part of the enclosure shall be disregarded (opened or removed) – that is, it shall not be assumed that the part in question affords protection against electric shock or injury to persons – if it either:


- a) Must be opened or removed, with or without the use of tools, to perform manufacturer's recommended user servicing, maintenance, operating adjustments, attachment of accessories, or other instructions; or
- b) Can be opened or removed without the use of tools. See [6.17](#).

Exception: A part that requires a tool for opening or removal to perform manufacturer's recommended user servicing, maintenance, operating adjustments, attachment of accessories, or other instructions shall remain in place if the appliance is marked in accordance with [67.9](#).


6.17 With reference to [6.16\(b\)](#), to determine that a part of an enclosure requires the use of tools for opening or removal, the enclosure or any part of the enclosure that relies for mechanical securement on non-metallic parts, such as plastic tabs or snap-action inserts and posts, shall comply with Non-Metallic Enclosure-Fasteners Test, Section [53](#).

Exception: An enclosure or enclosure part secured entirely by metallic fasteners (such as screws or rivets) to other enclosure parts is not required to be subjected to this test.


Figure 6.3
Opening in enclosure

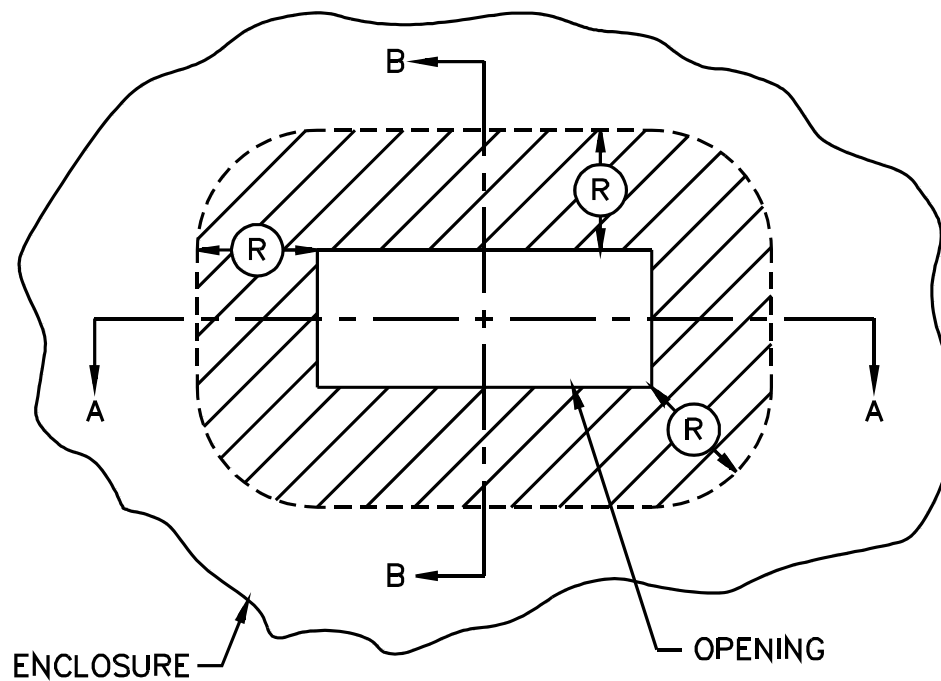

SECTION A-A
($X=R+T$)

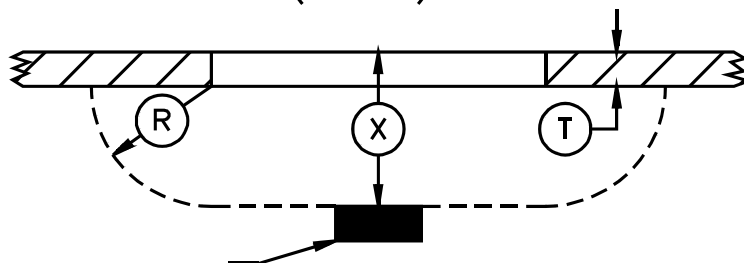

SECTION B-B
($X=R+T$)

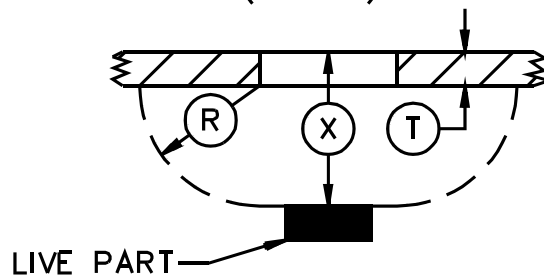

SB0610-1

Proportions exaggerated for clarity

6.18 Any moving parts, such as rotors of motors, chains, pulleys, belts, and gears, shall be enclosed or guarded to reduce the likelihood of injury to persons.

6.19 With reference to the requirements in [6.18](#), the degree of protection required of the enclosure depends upon the general construction and intended use of the appliance. The factors to be taken into consideration in judging the acceptability of exposed moving parts are:

- a) The degree of enclosure;
- b) The sharpness of the moving parts;
- c) The likelihood of unintentional contact with the moving parts;
- d) The speed of movement of those parts; and
- e) The likelihood of fingers, arms, or clothing being drawn into the moving parts (such as at points where gears mesh, where belts travel onto a pulley or where moving parts close in a pinching or shearing action).

6.20 The door or cover of an enclosure shall be provided with means for holding it securely in place in the closed position.

6.21 The door or cover of an enclosure shall be hinged or otherwise attached in an equivalent manner if it gives access to any overload protective device whose functioning requires renewal, or if it is necessary to open the cover in connection with the operation of the protective device. Such a door or cover shall be provided with a latch or the equivalent, and shall be tight-fitting or shall overlap the surface of the enclosure around the opening.

6.22 A component of an appliance shall be readily accessible without the use of special tools (tools not available to other than service personnel) if it is intended to be manually operated or adjusted or periodically serviced.

6.23 The bulb and capillary tube of a thermostat shall be protected from mechanical damage if damage of the tube or bulb increases the risk of fire.

6.24 A part relied upon for compliance with this Standard, when fabricated from polymeric materials, shall have clear traceability as to composition, ingredients, and processing for the fabricated part to the extent that the composition, ingredients, or process impacts the compliance of the product. Fabricated parts complying with the Standard for Polymeric Materials – Fabricated Parts, UL 746D, meets this requirement.

7 Assembly

7.1 A switch, lampholder, attachment-plug receptacle, plug-type receptacle, or plug-type connector provided as part of an appliance shall be mounted securely and prevented from turning by means other than friction between surfaces.

7.2 A lock washer properly applied is acceptable as a means to prevent turning of a stem-mounted switch.

7.3 Uninsulated live parts shall be secured to the base or surface so that they are prevented from turning or shifting in position as a result of stresses, if such motion may result in a reduction of spacings below the minimum required in [29.1](#) – [29.4](#).

7.4 Friction between surfaces is not acceptable as a means to prevent shifting or turning of live parts, but a lock washer properly applied is acceptable.

8 Stability

8.1 The stability of an appliance shall be such that it cannot be readily overturned during intended use.

8.2 A household cooking or warming appliance that is easily carried or conveyed by hand (such as a slow cooker, food warmer, and the like) in which liquids are heated to a temperature greater than 115°F (46°C) shall be placed on a plane inclined at an angle of 15 degrees to the horizontal. All other appliances shall be placed on a plane inclined at an angle of 10 degrees to the horizontal. The appliance shall be positioned and loaded with whatever combination of separable components, liquid, or other media (material) that results in the maximum tendency to overturn under conditions of intended use. Appliances in which liquids are heated shall contain a minimum of 5 ounces (148 mL) of liquid. The appliance shall be prevented from sliding on the inclined surface. The appliance shall not overturn as a result of this test.

9 Corrosion Protection

9.1 Iron and steel parts shall be protected against corrosion by enameling, galvanizing, plating, or other equivalent means, if the malfunction of such unprotected parts increases the risk of fire or electric shock.

Exception: In certain equipment where the oxidation of steel is not likely to be accelerated due to the exposure of metal to air and moisture or other oxidizing influence – thickness of metal and temperature also being factors – surfaces of sheet steel within an enclosure may not be required to be protected against corrosion. Cast-iron parts are not required to be protected against corrosion. A sheath employed on a heating element operating in air and terminal parts attached directly to the heating element need not be protected against corrosion.

9.2 The aging characteristics of plating or other finish used in an appliance shall be such that deterioration of the finish does not result in unacceptable performance of the appliance.

10 Supply Connections

10.1 Permanently connected appliances

10.1.1 General

10.1.1.1 Except as noted in [10.1.1.2](#), an appliance intended for permanent connection to the power supply shall have provision for connection of one of the wiring systems that, in accordance with the National Electrical Code, NFPA 70, is acceptable for the appliance.

10.1.1.2 An appliance that is intended to be fastened in place or located in a dedicated space may be acceptable if provided with a short length of appropriate flexible cord and an attachment plug for supply connection. The investigation of such a feature shall include consideration of the utility of the appliance and the necessity of having it readily detachable from its source of supply by means of the attachment plug.

10.1.1.3 The location of a terminal box or compartment in which power-supply connections to a permanently connected appliance are to be made shall be such that these connections can be readily inspected after the appliance is installed as intended.

10.1.1.4 A terminal compartment intended for the connection of a supply raceway shall be attached to the appliance in a manner to prevent turning.

10.1.2 Field wiring terminals

10.1.2.1 An appliance intended for permanent connection to the power supply shall be provided with wiring terminals or leads for the connection of conductors having an ampacity of not less than 125 percent of the current rating of the appliance when the load is continuous (3 hours or more) and not less than the current rating of the appliance when the load will be intermittent.

10.1.2.2 For the purpose of these requirements, wiring terminals are considered to be terminals to which power-supply or control connections are made in the field when the appliance is installed.

10.1.2.3 A wiring terminal shall be provided with a soldering lug or with a pressure wire connector securely fastened in place (for example, firmly bolted or held by a screw), except that a wire-binding screw may be employed at a wiring terminal intended to accommodate a 10 AWG (5.3 mm²) or smaller conductor if upturned lugs or the equivalent are provided to hold the wire in position.

10.1.2.4 A wiring terminal shall be prevented from turning or shifting in position by means other than friction between surfaces. This may be accomplished by two screws, rivets, square shoulders or mortises, a dowel pin, lug or offset, by a connecting strap or clip fitted into an adjacent part, or by some other equivalent method.

10.1.2.5 A wire-binding screw at a wiring terminal shall not be smaller than No. 10, except that a No. 8 screw may be used at a terminal intended for the connection of a 14 AWG (2.1 mm²) or smaller conductor, and a No. 6 screw may be used for the connection of a 16 AWG (1.3 mm²) or smaller control-circuit conductor.

10.1.2.6 A terminal plate tapped for a wire-binding screw shall be of metal not less than 0.050 inch (1.3 mm) thick, except that a plate not less than 0.030 inch (0.8 mm) thick is acceptable if the tapped threads provide equivalent mechanical strength. There shall be two or more full threads in the metal, which may be extruded if necessary to provide the threads.

10.1.2.7 Upturned lugs or a cupped washer shall be capable of retaining a conductor of the size mentioned in [10.1.2.1](#), but not smaller than 14 AWG (2.1 mm²), under the head of the screw or the washer.

10.1.2.8 A wire-binding screw shall thread into metal.

10.1.2.9 An appliance intended for connection to a grounded power-supply conductor and employing a lampholder or element holder of the Edison-screw-shell type, a single-pole switch, or a single-pole automatic control shall have one terminal or lead identified for connection of the grounded conductor of the supply circuit. The terminal or lead so identified shall be the one that is connected to screw shells of lampholders or element holders, and with no connections to single-pole switches or single-pole automatic controls, except as noted in [24.2](#).

10.1.2.10 A terminal intended for the connection of a grounded circuit conductor shall be made of or plated with a metal substantially white in color and shall be readily distinguishable from the other terminals, or proper identification of that terminal shall be clearly shown in some other manner, such as on an attached wiring diagram. A lead intended for the connection of a grounded circuit conductor shall be finished to show a white or gray color and shall be readily distinguishable from the other leads.

10.1.2.11 Except as noted in [10.1.2.12](#), the free length of a lead inside an outlet box or wiring compartment shall be 6 inches (152 mm) or more if the lead is intended for field connection to an external circuit.

10.1.2.12 A lead may be less than 6 inches (152 mm) in length if it is evident that the use of a longer lead results in an increased risk of fire or electric shock.


10.1.2.13 The surface of an insulated lead intended solely for the connection of an equipment-grounding conductor shall be green with or without one or more yellow stripes, and no other lead shall be identified.

10.1.2.14 A wire-binding screw intended for connection of an equipment-grounding conductor shall have a green-colored head that is hexagonal, slotted, or both. A pressure terminal connector intended for connection of an equipment-grounding conductor shall be plainly identified by:

- a) A marking, such as "G ", "GR ", "GND", "Ground ", "Grounding ", or the like;
- b) A wiring diagram provided on the appliance; or
- c) The grounding symbol illustrated in [Figure 10.1](#), on or adjacent to the terminal, or on a wiring diagram provided on the appliance.

The wire-binding screw or pressure terminal connector shall be located so that it does not require removal during normal servicing of the appliance.

Figure 10.1
Grounding Symbol

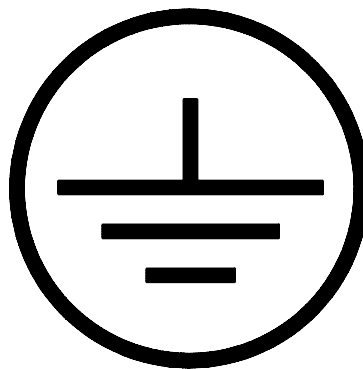

IEC417, Symbol 5019

10.1.2.15 A terminal solely for connection of an equipment-grounding conductor shall be capable of securing a conductor of the proper size for the particular appliance.

10.2 Cord-connected appliances

10.2.1 General

10.2.1.1 A cord-connected appliance (an appliance intended to be connected to the power-supply circuit by means of a flexible cord) shall be provided with a power-supply cord for connection to the supply circuit, or shall have male pin terminals that accommodate a detachable power-supply cord. The length of attached cord or separable cord shall be within the limit indicated in [Table 10.1](#).

10.2.1.2 For a cord-connected appliance, the rating (both current and voltage) of the cord and the fittings, shall not be less than that of the appliance. The current rating of the attachment plug shall not be less than 125 percent of the current rating of the appliance when the load will constitute a continuous load (3 hours or more).

10.2.1.3 An attached flexible cord and the cord in a detachable power-supply cord that is provided with an appliance shall be of a type indicated in [Table 10.2](#), or shall have such properties that it will be at least equally as serviceable for the particular application.

10.2.1.3.1 A cord set or power supply cord shall comply with the Standard for Cord Sets and Power-Supply Cords, UL 817.

10.2.1.3.2 Flexible cords and cables shall comply with the Standard for Flexible Cords and Cables, UL 62. Flexible cord and cables are considered to fulfill this requirement when preassembled in a cord set or power supply cord complying with the Standard for Cord Sets and Power-Supply Cords, UL 817.

10.2.1.4 An appliance with multiple supply connections, or an appliance and any of its accessories provided with independent supply connections, shall not exceed the rating of the intended branch circuit supply under simultaneous operation. See also [10.1.2.1](#). Any markings and instructions regarding using separate branch circuits shall be disregarded. Both sources of supply shall be considered to be on the same branch circuit.

Exception No. 1: Not applicable to an appliance with multiple sources of supply, or an appliance and each accessory with independent sources of supply, if provided with a single detachable power-supply cord acceptable for the purpose. No additional detachable power-supply cord shall be provided with either the appliance or the accessory.

Exception No. 2: Not applicable to accessories that comply with all requirements of this Standard independently. Tests are performed with the accessory placed on the supporting surface and not on the appliance.

Table 10.1
Lengths of cord connection

Type of appliance	Kind of cord connection	Minimum acceptable length ^a		Maximum acceptable length ^a	
		Feet	(Meters)	Feet	(Meters)
All counter top or table-top appliances, except slow cookers	Attached cord or detachable power supply cord	2.0	(0.6)	7.0	(2.1)
Slow cookers, for indoor use	Attached cord or detachable power supply cord	2.0	(0.6)	3.0	(0.9)
All appliances intended for outdoor use	Attached cord or detachable power supply cord	1.0	(0.3)	12.0	(3.6)
All appliances not covered above	Attached cord or detachable power supply cord	6.0	(1.8)	7.0	(2.1)

^a Measured external to the appliance and including the fittings but excluding the blades on the attachment plug.

Table 10.2
Acceptable types of cord and limitations on their use

Appliance on which the cord is to be used	Cords acceptable where temperatures are more than 121°C (250°F) on any surface that the cord is likely to touch when the appliance is used as intended	Cords acceptable where temperatures are 121°C (250°F) or less on any surface that the cord is likely to touch when the appliance is used as intended
Except as noted below, table stoves, toasters and other appliances that are not intended for use outdoors	HPD, HPN, HSJ, or HSJO	HPD, HPN, HSJ, HSJO, SP-2, SPE-2, SPT-2, SV, SVE, SVO, SVT, SVTO, SJ, SJE, SJO, SJT or SJTO
Barbecue-spit motor	SJE, SJO, SJT, or SJTO	SJE, SJO, SJT, or SJTO
Appliances intended for outdoor use	HSJW or HSJOW	HSJW, HSJOW, SJW, SJEW, SJOW, SJTW or SJTOW

10.2.1.5 Supplementary insulation, if employed in a flexible cord, shall not extend more than 1/2 inch (13 mm) outside the appliance, unless provided with additional mechanical protection, and shall be prevented from fraying or unraveling, and shall not affect adversely the means for providing strain relief.

10.2.1.6 A 3- to 2-wire, grounding-type adapter shall not be provided with an appliance.

10.2.1.7 The attachment plug of the power supply cord of an appliance provided with a 15- or 20-ampere general use receptacle shall be of the 3-wire grounding type. The attachment plug of the power supply cord of an appliance provided with a manually operated, line-connected, single pole switch for appliance on-off operation or an Edison-base lampholder shall be of the polarized or grounding type.

10.2.1.7.1 Attachment plugs, receptacles, appliance couplers, appliance inlets (motor attachment plugs), and appliance (flatiron) plugs, shall comply with the Standard for Attachment Plugs and Receptacles, UL 498.

Exception No. 1: Attachment plugs and appliance couplers integral to cord sets or power supply cords that are investigated in accordance with the Standard for Cord Sets and Power-Supply Cords, UL 817, are not required to comply with UL 498.

Exception No. 2: A fabricated pin terminal assembly need not comply with UL 498 if it complies with Frame and Enclosure, Section 6; Assembly, Section 7; 10.2.3; Current-Carrying Parts, Section 11; and Spacings, Section 29, of this end product Standard.

10.2.1.7.2 Female devices (such as receptacles, appliance couplers, and connectors) that are intended, or that may be used, to interrupt current in the end product, shall be suitably rated for current interruption of the specific type of load, when evaluated with its mating plug or connector. For example, an appliance coupler that can be used to interrupt the current of a motor load shall have a suitable horsepower rating when tested with its mating plug.

10.2.1.8 If a 3-wire grounding-type attachment plug or a 2-wire polarized attachment plug is provided, the attachment plug connection shall comply with [Figure 10.2](#), and the polarity identification of the flexible cord shall comply with [Table 10.3](#).

10.2.1.9 The conductor of the power supply cord that is intended to be grounded shall have the following items connected to it:


- a) The screw shell of an Edison-base lampholder; and
- b) The terminal or lead of a receptacle intended to be grounded.

[Table 10.3](#), identifies the supply cord conductor intended to be grounded.


Figure 10.2

Connection to attachment plug

CONNECTIONS OF CORD CONDUCTORS TO GROUNDING – TYPE
ATTACHMENT PLUG (FACE OF PLUG REPRESENTED)

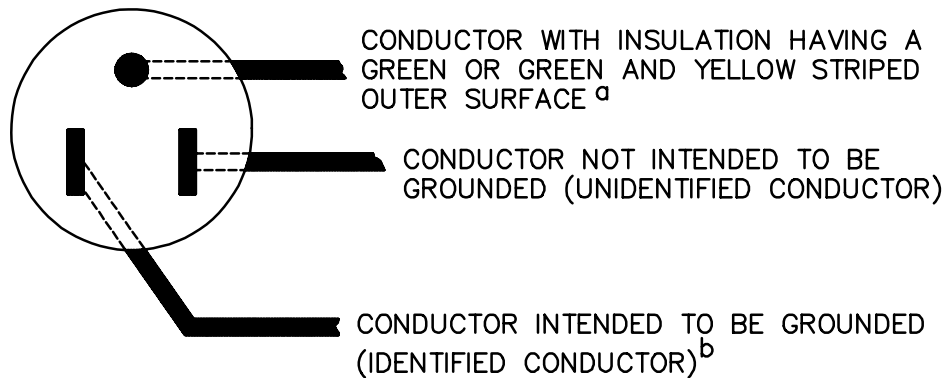

CONNECTIONS OF CORD CONDUCTORS TO POLARIZED
ATTACHMENT PLUG (FACE OF PLUG REPRESENTED)

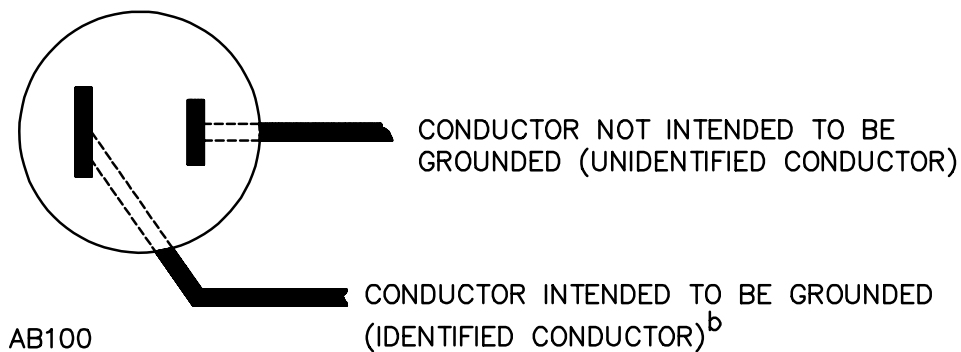

^a In the above illustration, the blade to which the green conductor is connected may have a U-shaped or circular cross section.

^b Signifies a conductor identified in accordance with [Table 10.3](#).

Table 10.3
Polarity of identification of flexible cords

Method of identification	Acceptable combinations		
	Wire intended to be grounded ^d		All other wires ^d
Color of braids on individual conductors	A	Solid white or gray – without tracer	Solid color other than white or gray – without tracer
	B	Color other than white or gray with tracer in braid	Solid color other than white or gray – without tracer
Color of insulation on individual conductors	C ^a	Solid white or gray	Solid color other than white, or gray
	C1 ^e	Light blue	Solid color other than light blue, white, or gray
Color of separators	D ^b	White or gray	Color other than white or gray
Other means	E ^c	Tin or other white metal on all strands of the conductor	No tin or other white metal on the strands of the conductor
	F ^b	A stripe, ridge or groove on the exterior surface of the cord	
^a Only for cords – other than Type SP-1, and SPT-1 – having no braid on any individual conductor. ^b Only for Types SP-1, SP-2, SPT-1, and SPT-2 cords. ^c Only for Type SPT-1 and SPT-2 cords. ^d A wire finished to show a green cord with or without one or more yellow stripes or tracers is to be used only as an equipment grounding conductor. See 31.3 and Figure 10.2 . ^e For jacketed cords.			

10.2.2 Strain relief

10.2.2.1 Strain relief shall be provided to prevent a mechanical stress on an attached flexible supply cord from being transmitted to terminals, splices, or interior wiring.

10.2.2.1.1 Insulating bushings serving as strain relief shall comply with the Standard for Insulating Bushings, UL 635. Tests specified in this Standard (e.g. Strain Relief Test) may still need to be performed to confirm the combination of the insulating bushing and the supporting part are suitable.

10.2.2.2 If wood, pressed board, or other fibrous material is used to secure the strain-relief assembly, the fibrous material shall be secured to the appliance by a pin, setscrew, or other positive means.

10.2.2.3 Means shall be provided to reduce the likelihood of an attached supply cord or lead from being pushed into the enclosure of an appliance through the cord-entry hole. To determine compliance with this requirement, the supply cord or lead shall be tested in accordance with Push-Back Relief Test, Section [47](#).

10.2.2.4 If a knot serves as strain relief in an attached flexible cord, any surface with which the knot may come in contact shall be free from projections, sharp edges, burrs, fins, and the like that may cause abrasion of the insulation on the conductors.

10.2.2.5 The strain-relief means provided on an attached flexible cord, when tested in accordance with [10.2.2.6](#), shall withstand for 1 minute, without transmitting stress to the electrical connections, a pull of 35 lbf (156 N) applied to the cord.

10.2.2.6 The cord shall be cut closest to the electrical connections to allow visibility to the conductors within the jacket. The specified force is to be applied to the cord and supported by the appliance so that the strain-relief means is stressed from any angle that the construction of the appliance permits. The means of affording strain relief is not acceptable if either:

- a) The cord jacket has moved such that it cannot meet the electrical connections without stress; or
- b) The conductors have been displaced by more than 0.078 in (2 mm) within the cord jacket.

10.2.3 Pin terminals

10.2.3.1 If an appliance is provided with pin terminals, the construction of the appliance shall be such that no live parts will be exposed to unintentional contact both during and after the placement of the plug on the pins, in the intended manner.

10.2.3.2 A pin guard is required, such that:

- a) A straight edge placed in any position, across and in contact with edges of the plug opening without the plug in place, cannot be made to contact any current-carrying pin.
- b) With the plug aligned with the pins and the face of the plug in a plane located perpendicular to the end or ends of the farthest projecting current-carrying pin, the probe illustrated in [Figure 6.2](#), should not touch any current-carrying pin while the probe is inserted through any opening with the appliance in any position.

10.2.3.3 The plug used in accordance with [10.2.3.2\(b\)](#), is to be the plug supplied with the appliance.

10.2.3.4 If an appliance employs three or more pin terminals intended for use with a plug that covers all the pins, the terminals shall be spaced so that they do not accommodate a flatiron or appliance plug or cord-connector body. The plug that these pins accommodate shall be appropriate for the particular application.

10.2.3.5 If an appliance is provided with a user removable heating element, the heating element shall have a guard that shall:

- a) Be securely and rigidly mounted by means other than friction alone; and
- b) Prevent the heating element pins from being damaged, shorting to the appliance enclosure during insertion or removal, and shifting in position relative to each other.

10.2.3.6 A pin terminal shall be securely and rigidly mounted and shall be prevented from shifting in position by means other than friction between surfaces.

10.2.3.7 The requirement in [10.2.3.6](#), is intended primarily to provide for maintenance of spacings as given in [29.1](#) and [Table 29.1](#) and [Table 29.2](#), and to provide for the maintenance of proper spacings between pin terminals. Under this requirement, consideration is also given to the means for locking terminals in position to maintain tightness.

10.2.3.8 The dimensions of pins and their center-to-center spacings, including the corresponding spacings of the female contacts of general-use plugs that these arrangements of pins will accommodate, are as indicated in [Table 10.4](#).

10.2.3.9 An appliance provided with three pin terminals, one of which is for grounding, shall not be provided with or capable of being used with a two-conductor detachable power-supply cord.

10.2.3.10 An appliance provided with two pin terminals shall not be provided with or capable of being used with a three-conductor detachable power-supply cord employing a grounding conductor.

Table 10.4
Pins of appliance and flatiron plugs

Type and rating of plug that accommodates the pins	Configuration of pins			Dimensions of pins	
	Number	Arrangement	Spacing between centers, inch (mm)	Diameter, inch (mm)	Length, inch (mm)
Appliance plug rated 5 A at 250 V and 10 A at 125 V	2	In line	1/2 (12.7)	0.156 ±0.005 (3.97 ±0.13)	9/16 – 5/8 (14.3 – 15.9)
Flatiron plug rated 5 A at 250 V and 10 A at 125 V	2	In line	11/16 (17.5)	0.188 ±0.005 (4.76 ±0.13)	3/4 – 7/8 (19.0 – 22.2)
Jumbo appliance plug rated 10 A at 250 V and 15 A at 125 V	2	In line	1-1/16 (27)	0.188 ±0.005 (4.76 ±0.13)	3/4 – 7/8 (19.0 – 22.2)
Reversible plug (for two-heat control) rated 10 A at 250 V and 15 A at 125 V ^a	3	In line	7/8 (22.2)	0.188 ±0.005 (4.76 ±0.13)	3/4 – 7/8 (19.0 – 22.2)
Reversible plug (for two- or three- heat control) rated 10 A at 250 V and 15 A at 125 V ^a	3	One pin at apex of an equilateral triangle	7/8 (22.2)	0.188 ±0.005 (4.76 ±0.13)	3/4 – 7/8 (19.0 – 22.2)
^a Usually this plug is made without a contact in one of the holes.					

10.2.4 Bushings

10.2.4.1 At a point where a flexible cord passes through an opening in a wall barrier or enclosing case, there shall be a bushing or the equivalent that shall be secured in place, and shall have a smooth, well-rounded surface against which the cord may bear. If Type SP-2, SPT-2, or other cord lighter than Type HSJ is employed, and if the wall or barrier is of metal, and if the construction is such that the cord may be subjected to strain or motion, an insulating bushing shall be provided. The heat- and moisture-resistant properties of the bushing material shall be such that the bushing is acceptable for the particular application.

10.2.4.1.1 In addition to the requirements in [10.2.4.1](#), Insulating bushings shall comply with the Standard for Insulating Bushings, UL 635.

10.2.4.2 If the cord hole is in wood, porcelain, phenolic composition, or other nonconducting material, a smooth, well-rounded surface is considered to be equivalent to a bushing.

10.2.4.3 Ceramic materials and some molded compositions are usually acceptable for insulating bushings, but a separate bushing of wood, hot-molded shellac and tar composition, or rubber material (other than in a motor) is not acceptable. Vulcanized fiber may be employed if the bushing is not less than 3/64 inch (1.2 mm) thick, and if it is so formed and secured in place that it will not be affected adversely by conditions of ordinary moisture.

10.2.4.4 A separate soft-rubber, neoprene, or polyvinyl chloride bushing may be employed in the frame of a motor or in the enclosure of a capacitor physically attached to a motor (but not elsewhere in an appliance, except as indicated in [10.2.4.5](#)) provided that:

- a) The bushing is not less than 3/64 inch (1.2 mm) thick; and
- b) The bushing is located so that it is not exposed to oil, grease, oily vapor, or other substance having a deleterious effect on the compound employed.

10.2.4.5 A bushing of any of the materials mentioned in [10.2.4.4](#), may be employed at any point in an appliance if used in conjunction with a type of cord for which an insulating bushing is not required, and if the edges of the hole in which the bushing is mounted are smooth and free from burrs, fins, and the like.

10.2.4.6 An insulated metal grommet may be accepted in place of an insulating bushing if the insulating material used is not less than 1/32 inch (0.8 mm) thick, and completely fills the space between the grommet and the metal in which it is mounted.

11 Current-Carrying Parts

11.1 Each current-carrying part shall be made of metal that is appropriate for the particular application.

11.2 Current-carrying parts made of corrosion-resistant alloys (for example, stainless steel) are acceptable regardless of temperature. Current-carrying parts made of ordinary iron and steel are not acceptable unless they are rendered corrosion-resistant by an appropriate coating and, even then, they are acceptable only as follows:

- a) Pin terminals;
- b) Terminal parts and other parts of a motor and its governor (if any);
- c) Parts whose normal operating temperature is higher than 100°C (212°F); and
- d) Parts of a component that the requirements referred to in [6.2](#) – [6.5](#), indicate as being acceptable with coated iron and steel parts.

11.3 If a reservoir is part of an appliance, all live parts shall be located or protected so that they are not subjected to dripping if the reservoir fails, unless:

- a) The reservoir is resistant to corrosion from the liquid intended for use in it; and
- b) The reservoir does not develop cracks as a result of aging.

12 Internal Wiring

12.1 General

12.1.1 The internal wiring of an appliance shall consist of wires of a size and type that are acceptable for the particular application, when considered with respect to:

- a) The temperature and voltage to which the wiring is likely to be subjected;
- b) Its exposure to oil or grease; and
- c) Other conditions of service to which it is likely to be subjected.

12.1.2 There is no temperature limit applicable to unimpregnated glass fiber, beads of inorganic material, or the equivalent employed as conductor insulation.

12.1.3 Internal wiring composed of insulated conductors shall comply with the Standard for Appliance Wiring Material, UL 758.

Exception No. 1: Insulated conductors need not comply with UL 758 if they comply with one of the following:

- a) *The Standard for Thermoset-Insulated Wires and Cables, UL 44;*

b) *The Standard for Thermoplastic-Insulated Wires and Cables, UL 83; or*

c) *The applicable UL standard for other insulated conductor types specified in Chapter 3, Wiring Methods and Materials, of the National Electrical Code, NFPA 70.*

Exception No. 2: Insulated conductors for specialty applications (e.g. data processing or communications) and located in a low-voltage circuit not involving the risk of fire, electric shock or injury to persons need not comply with UL 758.

12.2 Protection of wiring

12.2.1 The wiring and connections between parts of an appliance shall be protected or enclosed, except that a length of flexible cord may be employed for external connections, or for internal connections that may be exposed during servicing, if flexibility of the wiring is essential. A bare conductor or a conductor with beads for insulation shall not be used outside an enclosure.

12.2.2 Internal wiring that is exposed through an opening in the enclosure of an appliance is considered to be protected as required in [12.2.1](#), if when judged as if it were film-coated wire, the wiring is acceptable according to [6.9](#) – [6.13](#). Internal wiring not protected may be accepted if it is secured within the enclosure so that it is unlikely to be subjected to stress or mechanical damage.

12.2.3 If the wiring of an appliance is located so that it may be in proximity to combustible material or may be subjected to mechanical injury, it shall be armored cable or in rigid metal conduit, electrical metallic tubing, metal raceway, or shall otherwise be protected.

12.2.4 Wires within an enclosure, compartment, raceway, or the like shall be located or protected so that damage to conductor insulation cannot result from contact with any rough, sharp, or moving part.

12.2.5 A hole by means of which insulated wires pass through a sheet-metal wall within the overall enclosure of an appliance shall be provided with a smooth, well-rounded bushing or shall have smooth, well-rounded surfaces upon which the wires may bear, to prevent abrasion of the insulation. A flexible cord used for external inter-connection as mentioned in [12.2.1](#), shall be provided with strain relief and bushings in accordance with [10.2.2.1](#) – [10.2.2.6](#) and [10.2.4.1](#) – [10.2.4.6](#), unless the construction is such that the cord will be protected from stress or motion.

12.2.6 Insulated wires may be bunched and passed through a single opening in a metal wall within the enclosure of an appliance.

12.2.7 Wire positioning devices shall comply with the requirements in Electrical Insulation, Section [14](#). A device that complies with the Standard for Positioning Devices, UL 1565, is considered to comply with this requirement.

12.3 Splices

12.3.1 All splices and connections shall be mechanically secure and shall provide acceptable electrical contact. A soldered connection shall be made mechanically secure before being soldered if breaking or loosening of the connection results in risk of fire or electric shock.

Exception: Printed-wiring board joints need not be mechanically secure before soldering.

12.3.2 A splice shall be provided with insulation equivalent to that of the wires involved if permanence of spacing between the splice and other metal parts of the appliance is not maintained.

12.3.3 Insulation consisting of two layers of friction tape, two layers of thermoplastic tape, or of one layer of friction tape on top of one layer of rubber tape, is acceptable on a splice. In determining whether splice insulation consisting of coated fabric, thermoplastic, or other type of tubing is acceptable, consideration is to be given to such factors as its dielectric properties, heat-resistant and moisture-resistant characteristics. Thermoplastic tape wrapped over a sharp edge is not acceptable.

12.3.4 Where stranded internal wiring is connected to a wire-binding screw, loose strands of wire shall be positively prevented from contacting any other uninsulated live part that is not always of the same polarity as the wire, and from contacting any dead metal part. This may be accomplished by the use of pressure terminal connectors, soldering lugs, crimped eyelets, soldering all strands of the wire together, or other equivalent means.

12.3.5 Quick-connect type wire connectors shall be suitable for the wire size, type (solid or stranded), conductor material (copper or aluminum) and the number of conductors terminated. If insulated, they shall be rated for the voltage and temperature of the intended use. They shall be applied per the installation instructions of the wire connector manufacturer.

12.3.6 Quick-connect terminals, both connectors and tabs, for use with one or two 22 – 10 AWG copper conductors, having nominal widths of 2.8, 3.2, 4.8, 5.2, and 6.3 mm (0.110, 0.125, 0.187, 0.205, and 0.250 in), intended for internal wiring connections in appliances, or for the field termination of conductors to the appliance, shall comply with the Standard for Electrical Quick-Connect Terminals, UL 310.

Exception: Other sizes of quick-connect terminals shall be investigated with respect to crimp pull out, insertion-withdrawal, temperature rise, and all tests shall be conducted in accordance with UL 310.

12.3.7 Wire connectors shall comply with the Standard for Wire Connectors, UL 486A-486B.

12.3.8 Splicing wire connectors shall comply with the Standard for Splicing Wire Connectors, UL 486C.

12.3.9 Single and multi-pole connectors for use in data, signal, control and power applications within and between electrical equipment, and that are intended for factory assembly to copper or copper alloy conductors, or for factory assembly to printed wiring boards, shall comply with the Standard for Component Connectors for Use in Data, Signal, Control and Power Applications, UL 1977.

12.3.10 Multi-pole splicing wire connectors that are intended to facilitate the connection of hard-wired utilization equipment to the branch-circuit conductors of buildings shall comply with the Standard for Insulated Multi-Pole Splicing Wire Connectors, UL 2459.

12.3.11 Equipment wiring terminals for use with all alloys of copper, aluminum, or copper-clad aluminum conductors, shall comply with the Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors, UL 486E.

12.3.12 Terminal blocks shall comply with the Standard for Terminal Blocks, UL 1059, and, if applicable, be suitably rated for field wiring.

Exception: A fabricated part performing the function of a terminal block need not comply with UL 1059 if the part complies with the requirements of [10.1.2](#); Current-Carrying Parts, Section [11](#); Electrical Insulation, Section [14](#); and Spacings, Section [29](#), of this end product Standard. This exception does not apply to protective conductor terminal blocks.

12.4 Separation of circuits

12.4.1 Unless provided with insulation rated for the highest voltage involved, insulated conductors of circuits connected to separate sources of supply shall be separated by barriers or segregated. Except as

described in [12.4.3](#), an insulated conductor of one circuit shall be separated or segregated from any uninsulated live part of a different circuit.

12.4.2 Segregation of insulated conductors may be accomplished by clamping, routing, or an equivalent means which provides permanent separation from insulated or uninsulated live parts of a different circuit.

12.4.3 Field-installed conductors of any circuit shall be segregated by barriers from:

- a) Field-installation and factory-installed conductors connected to any other circuit, unless the conductors of both circuits are insulated for the maximum voltage of either circuit; and
- b) Uninsulated live parts of any other circuit of the appliance, and from any uninsulated live parts whose short-circuiting would result in risk of fire or electric shock, except that:
 - 1) A construction in which field-installed conductors may make contact with wiring terminals is acceptable provided that Type T, TF, or equivalent conductors are installed; and
 - 2) A construction in which field-installed conductors that do or may have insulation less than the types of wire mentioned in (1) may make contact with low-voltage wiring terminals (see [4.19](#)) is acceptable, provided that the short-circuiting of such terminals does not result in risk of fire or electric shock.

12.4.4 With respect to [12.4.3\(a\)](#), if the intended uses of an appliance are such that in some applications a barrier is required, a removable barrier or one having openings for the passage of conductors may be employed, provided instructions for the use of the barrier are a permanent part of the appliance, and complete instructions in conjunction with a wiring diagram may be acceptable instead of a barrier if, upon investigation, the combination is found to provide the required separation.

12.4.5 Segregation of field-installation conductors from other field-installation conductors and from uninsulated live parts of an appliance connected to different circuits may be accomplished by arranging the location of the openings in the enclosure for the various conductors (with respect to the terminals or other uninsulated live parts) so that there is no likelihood of the intermingling of the conductors or parts of different circuits. If the number of openings in the enclosure does not exceed the minimum required for the proper wiring of the appliance, and if each opening is located opposite a set of terminals, it is to be assumed (for the purpose of determining whether the appliance complies with the requirement in [12.4.3](#)) that the conductors entering each opening will be connected to the terminals opposite the opening. If more than the minimum number of openings are provided, the possibility of conductors entering at points other than opposite the terminals to which they are intended to be connected and contacting insulated conductors or uninsulated current-carrying parts connected to a different circuit is to be investigated. To determine whether the appliance complies with the requirement in [12.4.3](#), it is to be wired as it would be in service, and in doing so, a reasonable amount of slack is to be left in each conductor, within the enclosure, and no more than average care is to be exercised in stowing this slack in the wiring compartment.

12.4.6 If a barrier is used to provide separation between the wiring of different circuits, it shall:

- a) Be of metal or of insulating material;
- b) Be reliably held in place; and
- c) Be of a mechanical strength to withstand any anticipated mechanical exposure.

Unclosed openings in a barrier for the passage of conductors shall not be larger in diameter than 1/4 inch (6.4 mm) and shall not exceed in number, on the basis of one opening per conductor, the number of wires which will need to pass through the barrier. The closure for any other opening shall present a smooth surface wherever an insulated wire may be in contact with it, and the area of any such opening, with the closure removed, shall not be larger than required for the passage of the necessary wires.

12.4.7 A metal barrier shall have a thickness at least as great as the minimum acceptable thickness of the enclosure metal. A barrier of insulating material shall not be less than 0.028 inch (0.71 mm) thick, and shall be of greater thickness if its deformation may be readily accomplished so as to defeat its purpose.

13 Heating Elements

13.1 A heating element shall be adequately supported. It shall be protected against mechanical damage and contact with outside objects.

13.2 In determining that a heating element is adequately supported, consideration shall be given to sagging, loosening, and other adverse conditions of the element resulting from continuous heating. For an open-wire (uninsulated resistance wire) heating element, consideration shall also be given to breakage at any point. When a fiberglass rope heating element is provided, it shall be secured within the unit by a positive means such as screws, lock washers/nuts, rivets or the equivalent so that with minor loosening, disengagement of the heating element does not result in the risk of fire or shock as determined by the Abnormal Operation Test, Section [55](#).

13.3 Except for an automatic toaster, a heating element in an appliance that may be contacted by the user during intended use or cleaning shall not be of the open wire construction. An automatic toaster employing open wire heating elements and provided with a mode of operation that does not require the operation of both heating elements within a toaster slot meets the intent of the requirement provided at least one of the heating elements within the slot is visibly glowing.

13.4 An open-wire element, or uninsulated resistance wire, may be used in an appliance provided it is enclosed or protected by barriers or covers that require tools for removal, and it complies with the accessibility of live parts requirements outlined in [6.9](#), [6.13](#), and [6.14](#), and the Broken Element Test, Section [46](#).

13.5 A sheathed element, rope heater, or the like shall be judged under the applicable requirements of this Standard.

13.5.1 Heating wire (e.g. rope heater) that complies with the Standard for Appliance Wiring Material, UL 758, and the requirements of this end product Standard are considered to fulfill this requirement.

13.5.2 Thermistor-type heaters (e.g. PTC and NTC heaters) shall comply with the Standard for Thermistor-Type Devices, UL 1434.

13.6 An appliance in which the heating element is intended for operation only in an air blast shall be wired or controlled so that the element can be operated only while under the cooling effect of the blast. An appliance in which the cooling effect of the motion of a part is necessary for acceptable temperatures shall be wired or controlled so that the element cannot be operated without such motion.

13.7 The heating elements of an automatic toaster shall de-energize independently of the movement of a simulated toast load, as determined by [55.2.5.4](#).

14 Electrical Insulation

14.1 Insulating washers, bushings, and the like that are integral parts of an appliance, and bases or supports for the mounting of current-carrying parts, shall be of a moisture-resistant material that is not damaged by the temperatures to which they are subjected under conditions of actual use. Molded parts shall be constructed so that they have the mechanical strength and rigidity necessary to withstand the stresses of actual service.

14.2 Insulating material employed in an appliance shall be judged with respect to its acceptability for the particular application. Materials such as mica, some molded compounds, and certain refractory materials are usually acceptable for use as the direct support of live parts. Other materials which are not acceptable for general use, such as magnesium oxide, may be acceptable if used in conjunction with other more appropriate insulating materials or if located and protected against mechanical damage and the absorption of moisture is minimized. When it is necessary to investigate a material to determine whether it is acceptable, consideration is to be given to its mechanical strength, dielectric properties, insulation resistance, heat-resistant qualities, the degree to which it is enclosed or protected, and any other features having a bearing on the risk of fire, electric shock, or injury to persons involved, in conjunction with conditions of actual service. All of these factors shall be considered with respect to thermal aging. The appropriate tests in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C, see Electrical Insulation Section, shall be used to evaluate a material for the above mentioned properties.

Exception: Thermoset materials need not be subject to the relative thermal capability requirements of UL 746C. For a thermoset material operating at a temperature above its temperature rating, the 1000 hour Aging Test as specified in [54.1](#), shall be conducted.

14.3 In the mounting or supporting of small, fragile insulating parts, screws or other fastenings should not be tight enough to cause cracking or breaking of these parts with expansion and contraction. Generally, such parts should be slightly loose.

14.4 Sleeving or tubing used as an insulator for uninsulated live parts (such as glass fiber in rope heaters) shall be disposed or protected so that no damage to the sleeving or tubing results from contact with any rough, sharp, or moving part. The sleeving or tubing shall not be installed under a compression that renders it incapable of complying with the dielectric voltage-withstand requirements in [44.1](#).

14.5 The requirements for supplemental insulation (e.g. tape, sleeving or tubing) are not specified unless the insulation or device is required to fulfill the requirements of [14.4](#), or a performance requirement of this Standard. In such cases:

- a) Insulating tape shall comply with the Standard for Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape, UL 510;
- b) Sleeving shall comply with the Standard for Coated Electrical Sleeving, UL 1441; and
- c) Tubing shall comply with the Standard for Extruded Insulating Tubing, UL 224.

14.6 A printed-wiring board shall comply with the requirements in the Standard for Printed-Wiring Boards, UL 796. A printed-wiring board shall be rated V-1 or better.

14.7 Film-coated wire (magnet wire)

14.7.1 The component requirements for film coated wire and Class 105 (A) insulation systems are not specified.

14.7.2 Film coated wire in intimate combination with one or more insulators, and incorporated in an insulation system rated Class 120 (E) or higher, shall comply with the magnet wire requirements in the Standard for Systems of Insulating Materials – General, UL 1446, and shall have a suitable temperature class.

15 Thermal Insulation

15.1 Thermal insulation, if employed, shall be of such a nature and located and mounted or supported so that it is not adversely affected by any intended operation of the appliance. See [41.1.2](#).

15.2 Combustible or electrically conductive thermal insulation shall not make contact with uninsulated live parts of an appliance.

15.3 Some types of mineral-wool thermal insulation contain conductive impurities in the form of slag, which makes its use unacceptable if in contact with uninsulated live parts. See [43.1](#).

16 Motors and Transformers

16.1 A motor shall be appropriate for the particular application, and shall be capable of handling its maximum intended load without risk of fire, electric shock, or personal injury.

16.1.1 A motor shall comply with the Standard for Rotating Electrical Machines – General Requirements, UL 1004-1.

16.1.2 Motors located in a low voltage circuit are evaluated for the risk of fire and personal injury in accordance with the applicable requirements of this end product Standard.

16.2 A motor winding shall resist the absorption of moisture and shall be formed and assembled in a workmanlike manner.

16.3 With reference to the requirement in [16.2](#), film-coated wire is not required to be additionally treated to resist absorption of moisture. Fiber slot liners, cloth coil wrap, and similar moisture-absorptive materials shall be provided with impregnation or otherwise treated to resist moisture absorption.

16.4 An automatic bread maker that performs both a heating and motor-operated food preparation function, shall have the motor-operated food preparing function evaluated in accordance with the requirements for a dough maker, in the following Sections of the Standard for Motor-Operated Household Food Preparing Machines, UL 982: Capacitors, Starting Current Test, Normal Temperature Test, Abnormal Operation Test, Enclosures of Polymeric Material for Portable Appliances, and Thermoplastic Coil Forms and Thermoplastic Insulating Material.

16.5 A transformer in a circuit involving a risk of fire or electric shock shall comply with the requirements the following:

- a) The Standard for Low Voltage Transformers – Part 1: General Requirements, UL 5085-1; and
- b) The Standard for Low Voltage Transformers – Part 2: General Purpose Transformers, UL 5085-2; or
- c) The Standard for Low Voltage Transformers – Part 3: Class 2 and Class 3 Transformers, UL 5085-3.

Exception No. 1: A transformer located within another component (for example, a power supply or temperature control) need not comply with this requirement provided that the overall assembly meets the requirements for that component.

Exception No. 2: A transformer located in a Pollution Degree 1 or 2 environment (see [Table 26.3](#)) need not comply with this requirement provided that the transformer complies with the requirements in the Standard for Transformers and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances, UL 1411.

16.5.1 Neon sign transformers shall comply with the Standard for Neon Transformers and Power Supplies, UL 2161.

16.6 A low voltage component fan provided in an induction heating appliance shall comply with the requirement in the Standard for Electric Fans, UL 507.

17 Motor-Running Overcurrent (Overload) Protection

17.1 The following appliances in which a 1 hp or smaller motor is used shall incorporate thermal or overload protection that prevents the motor from attaining excessive temperatures under any operating conditions:

- a) A remotely or automatically controlled appliance; and
- b) A permanently connected, continuous-duty, manually started appliance.

An impedance-protected motor is not required to have additional thermal or overload protection.

17.2 An appliance intended to be automatically or remotely controlled, and employing a motor rated at more than 1 hp, shall incorporate thermal or overcurrent protection.

17.3 Fuses shall not be used as motor-overload-protective devices unless the motor is protected by the largest size of fuse that can be inserted in the fuseholder.

17.4 Thermal protection devices integral with the motor shall comply with one of the following:

- a) The Standard for Overheating Protection for Motors, UL 2111;
- b) The Standard for Thermally Protected Motors, UL 1004-3; or
- c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2 Particular Requirements for Thermal Motor Protectors, UL 60730-2-2; in conjunction with the Standard for Thermally Protected Motors, UL 1004-3 (to evaluate the motor-protector combination).

17.5 Impedance protection shall comply with one of the Standard for Impedance Protected Motors, UL 1004-2

17.6 Electronic protection integral to the motor shall comply with the Standard for Electronically Protected Motors, UL 1004-7.

17.7 Except as indicated in [17.6](#), electronically protected motor circuits shall comply with one of the following:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991. When the protective electronic circuit is relying upon software as a protective component, it shall comply with the requirements in the Standard for Software in Programmable Components, UL 1998. If software is relied upon to perform a safety function, it shall be considered software Class 1;
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1. If software is relied upon to perform a safety function, it shall be considered software Class B; or
- c) The Standard for Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal and Energy, UL 61800-5-1.

Exception: Compliance with the above standards is not required for an electronically protected motor circuit if there is no risk of fire, electric shock, or injury to persons during abnormal testing with the motor

electronic circuit rendered ineffective; compliance with the applicable requirements of this end product Standard is then required.

18 General (Short-Circuit and Ground-Fault) Overcurrent Protection

18.1 Overcurrent protection at not more than 20 A shall be provided by means of a circuit breaker or fuse, as a part of a heating appliance, for each general-use receptacle circuit and each lampholder circuit independent of a heating element, included in the appliance, unless the appliance would be properly connected to a branch circuit rated at 20 A or less.

18.2 The overcurrent protection mentioned in [18.1](#), shall be of a type indicated as being acceptable for branch-circuit protection.

18.3 A fuseholder or circuit breaker provided as a part of an appliance shall be acceptable for the particular application and shall not be accessible from the outside of the appliance without opening a door or cover, except that the operating handle of a circuit breaker may project outside of the enclosure. A fuseholder shall be so installed that no uninsulated live parts other than the screw shell or clips of the fuseholder are exposed to contact by a person removing or replacing a fuse. If the fuseholder is intended to be accessible only to a serviceman, uninsulated live parts other than the screw shell or clips may be exposed if they are guarded, or the fuseholder shall be located to prevent unintentional contact with these live parts.

18.4 Fuses shall comply with the Standard for Low-Voltage Fuses – Part 1: General Requirements, UL 248-1, and the applicable UL 248 Part 2 (e.g. the Standard for Low-Voltage Fuses – Part 5: Class G Fuses, UL 248-5). Defined use fuses that comply with UL 248-1 and another appropriate UL standard for the fuse are considered to comply with this requirement.

18.5 Fuseholders shall comply with one of the Standard for Fuseholders – Part 1: General Requirements, UL 4248-1, and the applicable Part 2 (e.g. the Standard for Fuseholders – Part 9: Class K, UL 4248-9).

18.6 When provided, circuit breakers shall comply with the Standard for Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures, UL 489.

Exception: Circuit breakers used in telecommunications circuitry that comply with the Standard for Circuit Breakers for Use in Communications Equipment, UL 489A, need not comply with UL 489.

18.7 Circuit breakers having integral ground fault circuit interrupter capability for protection against electrical shock shall additionally comply with the Standard for Ground-Fault Circuit-Interrupters, UL 943.

18.8 Supplementary protectors shall comply with the Standard for Supplementary Protectors for Use in Electrical Equipment, UL 1077.

19 Overcurrent and Over-Temperature Protection

19.1 If an appliance is provided with a replaceable overcurrent and/or over-temperature protective device, the device shall be secured in place and shall be located so that it is accessible for replacement without damaging other connections or internal wiring. See [67.9](#).

19.2 If an appliance is provided with a fusible device, the device shall be capable of opening the circuit in the intended manner without causing the short-circuiting of live parts and without causing live parts to become grounded to the enclosure when the appliance is connected to a circuit of voltage in accordance with [41.1.14](#), and operated in a normal position to cause abnormal heating.