

UL 1727

Commercial Electric Personal Grooming Appliances



Underwriters Laboratories Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062-2096

UL Standard for Safety for Commercial Electric Personal Grooming Appliances, UL 1727

Fourth Edition, Dated March 25, 1999

Revisions: This Standard contains revisions through and including February 7, 2008.

Summary of Topics

These revisions include the deletion of obsolete Type AF wire from Internal Wiring Requirements and incorporation of miscellaneous editorial corrections.

UL Standards for Safety are developed and maintained in the Standard Generalized Markup Language (SGML). SGML -- an international standard (ISO 8879-1986) -- is a descriptive markup language that describes a document's structure and purpose, rather than its physical appearance on a page. Due to formatting differences resulting from the use of UL's new electronic publishing system, please note that additional pages (on which no requirements have been changed) may be included in revision pages due to relocation of existing text and reformatting of the Standard.

Text that has been changed in any manner is marked with a vertical line in the margin. Changes in requirements are marked with a vertical line in the margin and are followed by an effective date note indicating the date of publication or the date on which the changed requirement becomes effective.

The revised requirements are substantially in accordance with UL's Proposal(s) on this subject dated December 18, 2007.

The revisions dated February 7, 2008 include a reprinted title page (page1) for this Standard.

The UL Foreword is no longer located within the UL Standard. For information concerning the use and application of the requirements contained in this Standard, the current version of the UL Foreword is located on ULStandardsInfoNet at: <http://ulstandardsinfo.net/ulforeword.html>

The master for this Standard at UL's Northbrook Office is the official document insofar as it relates to a UL service and the compliance of a product with respect to the requirements for that product and service, or if there are questions regarding the accuracy of this Standard.

UL's Standards for Safety are copyrighted by UL. Neither a printed copy of a Standard, nor the distribution diskette for a Standard-on-Diskette and the file for the Standard on the distribution diskette should be altered in any way. All of UL's Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of UL.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of UL.

Revisions of UL Standards for Safety are issued from time to time. A UL Standard for Safety is current only if it incorporates the most recently adopted revisions.

UL provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will UL be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if UL or an authorized UL representative has been advised of the possibility of such damage. In no event shall UL's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

UL will attempt to answer support requests concerning electronic versions of its Standards. However, this support service is offered on a reasonable efforts basis only, and UL may not be able to resolve every support request. UL supports the electronic versions of its Standards only if they are used under the conditions and operating systems for which it is intended. UL's support policies may change from time-to-time without notification.

UL reserves the right to change the format, presentation, file types and formats, delivery methods and formats, and the like of both its printed and electronic Standards without prior notice.

Purchasers of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold UL harmless from and against any loss, expense, liability, damage, claim, or judgement (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

If a single-user version electronic Standard was purchased, one copy of this Standard may be stored on the hard disk of a single personal computer, or on a single LAN file-server or the permanent storage device of a multiple-user computer in such a manner that this Standard may only be accessed by one user at a time and for which there is no possibility of multiple concurrent access.

If a multiple-user version electronic Standard was purchased, one copy of the Standard may be stored on a single LAN file-server, or on the permanent storage device of a multiple-user computer, or on an Intranet server. The number of concurrent users shall not exceed the number of users authorized.

Electronic Standards are intended for on-line use, such as for viewing the requirements of a Standard, conducting a word search, and the like. Only one copy of the Standard may be printed from each single-user version of an electronic Standard. Only one copy of the Standard may be printed for each authorized user of a multiple-user version of an electronic Standard. Because of differences in the computer/software/printer setup used by UL and those of electronic Standards purchasers, the printed copy obtained by a purchaser may not look exactly like the on-line screen view or the printed Standard.

An employee of an organization purchasing a UL Standard can make a copy of the page or pages being viewed for their own fair and/or practical internal use.

The requirements in this Standard are now in effect, except for those paragraphs, sections, tables, figures, and/or other elements of the Standard having future effective dates as indicated in the note following the affected item. The prior text for requirements that have been revised and that have a future effective date are located after the Standard, and are preceded by a "SUPERSEDED REQUIREMENTS" notice.

New product submittals made prior to a specified future effective date will be judged under all of the requirements in this Standard including those requirements with a specified future effective date, unless the applicant specifically requests that the product be judged under the current requirements. However, if the applicant elects this option, it should be noted that compliance with all the requirements in this Standard will be required as a condition of continued Listing, Recognition, and Follow-Up Services after the effective date, and understanding of this should be signified in writing.

Copyright © 2008 Underwriters Laboratories Inc.

**UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM**



Documents
Document Sharing Hub

This Standard consists of pages dated as shown in the following checklist:

Page	Date
1	February 7, 2008
2-3	February 10, 2006
4	February 7, 2008
4A-5	July 30, 2001
6	February 10, 2006
7	July 30, 2001
8	February 7, 2008
8A-11	July 30, 2001
12-16	March 25, 1999
17-20B	July 30, 2001
21	March 25, 1999
22-24B	July 30, 2001
25-30	March 25, 1999
31-32B	February 7, 2008
33	March 25, 1999
34-34B	July 30, 2001
35	February 7, 2008
36	July 30, 2001
37	February 7, 2008
38-38B	July 30, 2001
39	March 25, 1999
40-42	July 30, 2001
42A	February 7, 2008
42B	July 30, 2001
43-46	March 25, 1999
47	February 10, 2006
48	February 7, 2008
48A-48B	February 10, 2006
49-50B	February 7, 2008
51-53	March 25, 1999
54-55	July 30, 2001
56-58	March 25, 1999
59-62	July 30, 2001
63-69	March 25, 1999
70	July 30, 2001
71-72	February 7, 2008
73	March 25, 1999
74	February 7, 2008
75	March 25, 1999
76-77	February 10, 2006
78-81	March 25, 1999
82-86	July 30, 2001
87-88	March 25, 1999
89-90B	February 10, 2006
91-93	March 25, 1999
94	July 30, 2001
95	March 25, 1999
96-102	July 30, 2001
103-114	March 25, 1999

115	February 7, 2008
116-116B	July 30, 2001
117-118	March 25, 1999
119-122	July 30, 2001
123-128	March 25, 1999
129-132	July 30, 2001
SA1-SA2	March 25, 1999
A1-A2	February 7, 2008

MARCH 25, 1999

(Title Page Reprinted: February 7, 2008)

1

UL 1727

Standard for Commercial Electric Personal Grooming Appliances

Prior to the first edition, the requirements for the products covered by this standard were included in the Standard for Electric Personal Grooming Appliances, UL 859.

First Edition – May, 1986

Second Edition – October, 1988

Third Edition – March, 1994

Fourth Edition

March 25, 1999

An effective date included as a note immediately following certain requirements is one established by Underwriters Laboratories Inc.

Revisions of this Standard will be made by issuing revised or additional pages bearing their date of issue. A UL Standard is current only if it incorporates the most recently adopted revisions, all of which are itemized on the transmittal notice that accompanies the latest set of revised requirements. Comments or proposals for revisions on any part of the Standard may be submitted to UL at any time. Proposals should be submitted via a Proposal Request in UL's On-Line Collaborative Standards Development System (CSDS) at <http://csds.ul.com>.

COPYRIGHT © 1986, 2008 UNDERWRITERS LABORATORIES INC.

No Text on This Page



CONTENTS

INTRODUCTION

1 Scope	7
2 General	7
2.1 Components	7
2.2 Units of measurement	8
2.3 Undated references	8
3 Glossary	8
4 Types of Appliances	12

CONSTRUCTION

5 Stands	13
6 Hair Dryer Immersion Protection	13
7 Frame and Enclosure	15
7.1 General	15
7.2 Polymeric enclosures	16
7.3 Metal enclosures	16
7.4 Accessibility of live parts	16
7.5 Enclosure integrity	20A
7.6 Doors and covers	21
7.7 Hanging and mounting means	23
8 Adhesives Used to Secure Parts	24
9 Reduction of Risk of Injury to Persons	24
9.1 General	24
9.2 Appliances with reservoirs	25
10 Protection of Service Personnel	25
11 Mechanical Assembly	25
12 Stability	27
13 Corrosion Resistance	27
14 Supply Connections	28
14.1 Permanently-connected appliances	28
14.2 Field-wiring compartments	28
14.3 Wiring terminals and leads	31
14.4 Cord-connected appliances	33
14.5 Pin terminals	34A
14.6 Strain relief	38
14.7 Bushings	38A
14.8 Direct plug-in appliances	39
15 Live Parts	42
16 Wetting of Live Parts	42
17 Liquid-Containing Parts	42A
18 Internal Wiring	42A
18.1 General	42A
18.2 Protection of wiring	42B
18.3 Splices and connections	43
18.4 Interconnecting cord and cable	44
18.5 Separation of circuits	44
18.6 Barriers	45
18.7 Termination of aluminum conductors	46

19	Heating Element	46
20	Sheathed Heating Element	46
21	Electrical Insulation	46
22	Thermal Insulation	47
23	Overcurrent Protection	47
24	Thermal Cutoffs	48
25	Immersion Detection Circuit Interrupters (IDCIs)	48
26	Lampholders and Receptacles	49
27	Capacitors	50
28	Printed-Wiring Boards	50A
29	Electronic Control Equipment	50A
30	Switches	51
30.1	General	51
30.2	Dual voltage selector	52
31	Automatic Controls	52
32	Spacings	52
33	Secondary Circuits	56
33.1	General	56
33.2	Connections to frame	57
34	Conformal Coatings	57
35	Grounding	57
35.1	General	57
35.2	Bonding for grounding	58
35.3	Bonding conductor	59
36	Motors	60
36.1	Construction	60
36.2	Brush wear out	60A
36.3	Overload protection	60A

PERFORMANCE

37	General	60B
38	Leakage Current Test	63
39	Operational Test	66
40	Starting Current Test	66
41	Power Input Test	66
42	Temperature Test	67
42.1	General	67
42.2	Hair dryers	73
42.3	Motor slowdown test method	74
42.4	Temperature test – motor slowdown	75
43	Dielectric Voltage-Withstand Test	78
43.1	Primary circuits	78
43.2	Secondary circuits	79
44	Leakage Current Test Following Humidity Conditioning	80
45	Immersion Detection Circuit Interrupter (IDCI) Trip Time Measurement Test	80
45.1	As-received hair dryers	80
45.2	Conditioned hair dryers	81
46	Dew Point Humidity Test	82
47	Conductive Coating Test	83
47.1	General	83

UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL



Documents

Document Sharing Hub

47.2 Thermal cycling	83
47.3 Limited thermal aging	84
47.4 Short term aging	84
47.5 Humidity conditioning	84
48 Abnormal Operation Test	86
48.1 General	86
48.2 General test conditions	87
48.3 Specific test conditions	89
49 Exposure to Moisture Test	93
50 Flooding of Live Parts Test	94
51 Overflow Test	95
52 Stability Test	95
53 Tip-Over Test	95
54 Strength of Enclosure Test	97
55 Mounting Means Strength Test	98
56 Strain Relief Test	98
57 Torque Test	98A
58 Power-Supply Cord Push-Back Relief Test	98A
59 Cord Flexing Test	98B
60 Test for Security of Swivel Assembly	100
61 Swivel Endurance Test	100
62 Hinge Endurance Test	101
63 Overload Test of Switches and Controls	103
64 Automatic Controls Tests	103
64.1 Overload test	103
64.2 Endurance test	104
65 Grounding Continuity Test	104
66 Test for Permanence of Cord Tag for Hand-Supported, Hair-Drying Appliances	105
66.1 General	105
66.2 Test conditions	105
66.3 Test method	106
67 Permanence of Marking Test	106
68 Extended Operation Test	106
69 Physical Properties of a Liquid Container, Seal, or Diaphragm Test	109

MANUFACTURING AND PRODUCTION TESTS

70 Dielectric Voltage-Withstand Test	110
71 Grounding Continuity Test	113
71.1 Continuity of grounding connection	113
71.2 Electrical indicating device	113
72 Hair Dryer Power Input Test	113

RATINGS

73 Details	113
------------------	-----

MARKINGS

74 Details	114
74.1 General	114
74.2 Permanently-connected appliances	115
74.3 Ungrounded dead-metal parts	116A

74.4 Fuse replacement	116A
74.5 Fuse marking	117
74.6 Automatic starting	117
74.7 Double insulation	117
74.8 Body- or table-supported hood- or bonnet-type hair dryers	117
74.9 Hand-supported, hair-drying appliances	117
74.10 Permanently-installed, wall-mounted hair dryers	119
74.11 Curling irons	122
74.12 Dual-voltage appliances	122
74.13 Appliances with IDCIs, GFCIs, or similar protective devices	122

INSTRUCTION MANUALS

75 General	122
76 Instructions Pertaining to a Risk of Fire, Electric Shock, or Injury to Persons	123
77 Installation Instructions	131
78 Operating Instructions	131
79 User-Maintenance Instructions	132

SUPPLEMENT SA - WALL-HUNG HAIR DRYERS

SA1 Scope	SA1
SA2 General	SA1
SA3 Construction	SA1
SA4 Performance	SA1
SA5 Marking	SA2
SA6 Use and Care Instructions	SA2
SA7 Installation Instructions	SA2

APPENDIX A

Standards for Components.....	A1
-------------------------------	----

No Text on This Page



This page intentionally left blank.



INTRODUCTION

1 Scope

1.1 These requirements cover electric personal grooming appliances intended for use by qualified personnel in commercial establishments such as beauty parlors, barber shops, or cosmetic studios. These appliances include hair curlers and dryers, combs, brushes, and similar appliances that are to be employed in accordance with the National Electrical Code, ANSI/NFPA 70.

1.2 These requirements do not cover therapeutic lamps, diathermy equipment, massage machines, vibrators, hair clippers, shavers, facial caps, masks, mitts, or other appliances covered by other requirements such as in the Standard for Medical and Dental Equipment, UL 544. These requirements also do not cover hair curlers or dryers rated at more than 250 volts.

1.3 A product that contains features, characteristics, components, materials, or systems new or different from those covered by the requirements in this standard, and that involves a risk of fire or of electric shock or injury to persons shall be evaluated using appropriate additional component and end-product requirements to maintain the level of safety as originally anticipated by the intent of this standard. A product whose features, characteristics, components, materials, or systems conflict with specific requirements or provisions of this standard does not comply with this standard. Revision of requirements shall be proposed and adopted in conformance with the methods employed for development, revision, and implementation of this standard.

1.3 revised July 30, 2001

2 General

2.1 Components

2.1.1 Except as indicated in 2.1.2, a component of a product covered by this standard shall comply with the requirements for that component. See Appendix A for a list of standards covering components generally used in the products covered by this standard.

2.1.1 revised July 30, 2001

2.1.2 A component is not required to comply with a specific requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product covered by this standard, or
- b) Is superseded by a requirement in this standard.

2.1.2 revised July 30, 2001

2.1.3 A component shall be used in accordance with its rating established for the intended conditions of use.

2.1.3 revised July 30, 2001

2.1.4 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

2.1.4 revised July 30, 2001

2.2 Units of measurement

2.2.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

2.2.2 Unless otherwise indicated, all voltage and current values mentioned in this standard are root-mean-square (rms).

2.3 Undated references

2.3.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

3 Glossary

3.1 For the purpose of this standard the following definitions apply.

3.2 **AUTOMATIC CONTROL** – A device intended for automatic control of operating time, temperature, or pressure under conditions of intended operation and not for protection against conditions resulting from abnormal operations.

3.3 **AUTOMATICALLY CONTROLLED APPLIANCE** – An appliance is considered to be automatically controlled if it complies with one or more of the following conditions:

- a) The repeated starting of the appliance is independent of any manual control if, after one complete cycle of operation, a limit device or similar device opens the circuit.
- b) During any single preset cycle of operation, the motor is caused to stop and restart.
- c) When the appliance is energized, the initial starting of the motor may be intentionally delayed beyond intended, conventional starting.
- d) For an appliance employing a motor with a separate starting winding, during any single predetermined cycle of operation automatic changing of the mechanical load reduces the motor speed sufficiently to re-establish starting-winding connections to the supply circuit.

3.4 **BODY-SUPPORTED APPLIANCE** – An appliance that is physically supported by any part of the body, other than the hand of the user, during the performance of its intended electrically operated functions (such as a shoulder-, body-, or head-supported hair dryer) is to be considered a body-supported appliance. Reference is to be made to the user manual of the appliance in establishing the intended electrically operated functions of the appliance.

3.5 **CONTINUOUS-DUTY MOTOR** – A motor that can operate unattended and under load under any normal conditions of use for 3 hours or more.

3.6 **COUNTER-SUPPORTED APPLIANCE** – An appliance that is physically supported by a counter, table, or bench during the performance of its intended electrically operated functions (such as a hair curler heater) is considered a counter-supported appliance. Reference is to be made to the user manual of the appliance in establishing the intended electrically operated functions of the appliance.

3.7 DEAD-METAL PART – A metal or other electrically conductive part, accessible or inaccessible, that is not conductively connected to a live part.

3.8 DIRECT PLUG-IN APPLIANCE – An appliance, without a power supply cord, that is physically supported by direct insertion of its integral blades into a receptacle is considered a direct plug-in appliance.

3.9 DIRECTLY ACCESSIBLE MOTOR – A motor that:

- a) Can be contacted without opening or removing any part of an enclosure or guard or
- b) Is located so as to be accessible to contact.

3.10 DUAL-VOLTAGE APPLIANCE – An appliance rated for use on a supply circuit of either of two different voltages (for example, 120 volts and 240 volts) and usually provided with a means to change from one voltage to the other.


3.11 FIXED APPLIANCE – An appliance intended to be permanently connected electrically.

3.12 FLOOR-SUPPORTED APPLIANCE – An appliance that is physically supported by the floor during the performance of its intended electrically operated functions (such as hair dryers with roll-about stands) is considered a floor-supported appliance. Reference is to be made to the user manual of the appliance in establishing the intended electrically operated functions of the appliance.

3.13 HAIR-CRIMPING IRON – A hand-supported hair curling appliance having hinged arms and ridged or wavy surfaced electrically heated tongs between which hair is curled. A typical construction is shown in Figure 3.1.

3.14 HAIR CURLER HEATER (HAIR SETTER) – A counter-supported appliance having posts or wells on or in which hair curling devices (rollers and the like) are heated before being applied to the hair. The term also applies to a construction that has individual electrical hair curlers (rollers) with built-in heating elements and male electrical fittings which plug into female contacts in the appliance.

Figure 3.1
Typical hair-crimping iron

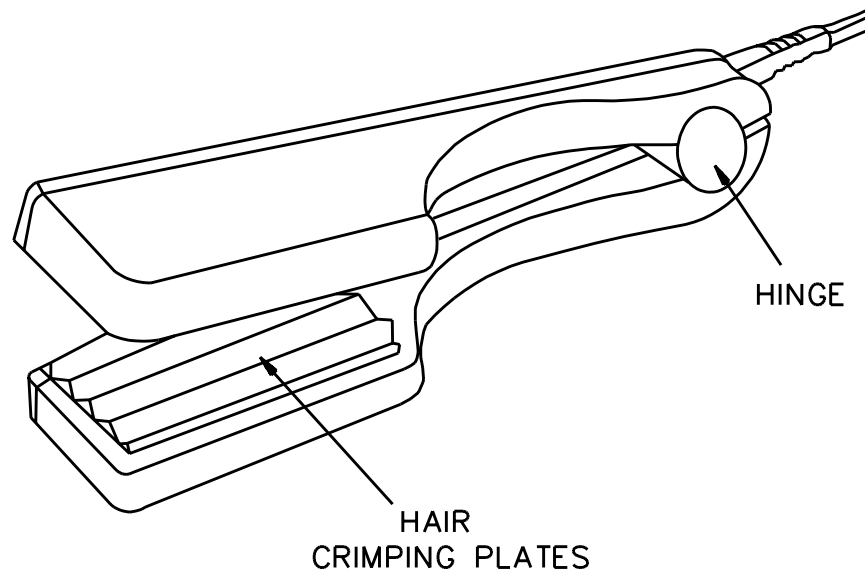

S3516

3.15 HAIR-STRAIGHTENING IRON – An appliance similar to a hair-crimping iron as described in 3.13 except that the hair-crimping plates are replaced with flat plates.

3.16 HAND-HELD APPLIANCE, HAND-GUIDED APPLIANCE – A portable appliance that during intended use is contacted by the hand of the user for purposes of electrical or physical control but not for complete support.

3.17 HAND-SUPPORTED APPLIANCE – An appliance that is physically supported by the hand of the user during the performance of its intended functions (such as a curling iron) is considered a hand-supported appliance. Reference is to be made to the user manual of the appliance in establishing the intended electrically operated functions of the appliance.

3.18 HEATED-AIR CURLING IRON (or BRUSH) – A curling iron (or brush) in which a fan included in the appliance blows air over the heating elements and out through openings in the barrel of the appliance.

3.19 IMMERSION DETECTION CIRCUIT INTERRUPTER (IDCI) – A resettable or non-resettable device that interrupts (trips) the supply circuit to an immersed appliance when a conductive liquid enters the appliance and contacts both a live part and an internal sensor which causes the current flow between the live part and the sensor to exceed a predetermined level.

3.20 INDIRECTLY ACCESSIBLE MOTOR – A motor that is accessible only by opening or removing a part of the outer enclosure, such as a guard or panel, that can be opened or removed without using a tool, or a motor that is located or otherwise guarded or enclosed so that it is unlikely to be contacted.

3.21 INPUT VOLTAGE SELECTOR – The means provided on an appliance to adjust for the available input voltage.

3.22 INTERLOCK – A device that automatically de-energizes electrical components or stops moving parts that become exposed when an enclosure is opened or when a cover is removed.

3.23 ISOLATING TRANSFORMER – A transformer of which one or more output windings is electrically separated from the input winding.

3.24 LIMIT CONTROL – As applicable to hand-supported hair dryers, a limit control, as shown in note A of Figure 3.2, is a non-resettable control (a control intended to operate only once; that is, the control is not intended to be nor can it be reset or reconditioned for reuse) that operates to open all electrical circuits to reduce the risk of fire or electric shock.


3.25 LIMITED-ENERGY PRIMARY CIRCUIT – A line-voltage circuit that incorporates a limiting impedance in series with the supply circuit so that:

- a) The circuit potential on the load side of the limiting impedance does not exceed 42.4 volts peak (30 volts rms), under intended conditions and
- b) The maximum energy available at the load side of the limiting impedance circuit is 100 volt-amperes under any condition, including abnormal operation.

3.26 LINE-VOLTAGE CIRCUIT – A circuit involving a potential of no more than 250 volts and having circuit characteristics in excess of those of a low-voltage circuit or a limited-energy primary circuit.

3.27 LIVE PART – A part energized with respect to earth or to some other part.

Figure 3.2
Typical hair dryer circuit



NOTES

A – Limit control (a non-resettable device, as defined in 3.24).

B – Temperature control (a calibrated automatic-reset device, as defined in 3.36).

B₁, B₂ – Temperature control shown at two other locations.

C – Switches.

M – Motor.

3.28 LOW-VOLTAGE CIRCUIT – A circuit supplied by a primary battery, by a Class 2 transformer, or by a combination of a transformer and fixed impedance that, as a unit, complies with all performance requirements for Class 2 transformers and that does not involve an open circuit potential of more than 42.4 volts peak (30 volts rms).

3.29 ORDINARY TOOL – A flat blade or Phillips head screwdriver, wrench, pliers, or other simple tool that is readily available.

3.30 PORTABLE APPLIANCE – An appliance capable of being carried or conveyed.

3.31 PREHEAT CYCLE – A cycle of operation in which the heating element initially operates at a higher wattage for a predetermined length of time at the end of which the wattage drops to a lower continuous operation level. The preheat cycle may or may not be repeated during a use of the appliance. The temperature transient condition associated with the operation of a positive temperature coefficient (PTC) heating element is not considered to be a preheat cycle.

3.32 REMOTELY-CONTROLLED APPLIANCE – An appliance that is out of view of the operator at the starting device.

3.33 SAFETY CIRCUIT – Any circuit, either in the primary or secondary, that is relied upon to reduce the risk of fire, electric shock, or injury to persons; for example, an interlock circuit is considered a safety circuit.

No Text on This Page



3.34 SECONDARY CIRCUITS – Circuits supplied from the secondary windings of isolating transformers. See 33.1.1 – 33.2.2.

3.35 STATIONARY APPLIANCE – A cord-connected appliance that is intended to be fastened in place or located in a dedicated space.

3.36 TEMPERATURE CONTROL – As applicable to hand-supported hair dryers, a temperature control, as shown in note B of Figure 3.2, is an automatic-reset temperature-sensing control that operates to open an electrical circuit to limit temperatures during motor slowdown and abnormal operation. A temperature control is a calibrated control that is intended for at least 6000 cycles of operation and that complies with all other requirements in the Standard for Limit Controls, UL 353, or in the Standard for Temperature-Indicating and -Regulating Equipment, UL 873.

3.37 TEMPERATURE-LIMITING CONTROL – A control that functions only under conditions that produce temperatures higher than intended. The breakdown of the control might or might not result in a risk of fire, electric shock, or injury to persons.

3.38 TEMPERATURE-REGULATING AND -LIMITING CONTROL – A combination control that functions to regulate the temperature of the appliance under conditions of intended use, and also serves to reduce the risk of electric shock or injury to persons that might result from higher than intended temperatures.

3.39 TEMPERATURE-REGULATING CONTROL – A control that functions only to regulate the temperature under conditions of intended use. The breakdown of the control would not result in a risk of fire, electric shock, or injury to persons.

3.40 THERMAL CUTOFF – A temperature or temperature- and current-sensitive device incorporating a thermal element for protecting a circuit by opening the protected circuit when the device reaches a predetermined temperature. It is intended to reduce the risk of fire, electric shock, or injury to persons due to overheating of an appliance during abnormal operation and to operate only once, that is, it cannot be reset or reconditioned for reuse.

3.41 WALL-HUNG APPLIANCE – A cord-connected appliance that is provided with concealed (see 7.7.2) keyhole slots, hanger holes, or the like in order to be hung on a wall and that does not require the use of tools for removal from the wall. A wall-hung appliance may consist of two interconnected units where one is intended to hang on a wall and the other is intended to be supported by hand during use.

3.42 WALL-MOUNTED APPLIANCE – An appliance that is permanently attached to a wall surface, and connected electrically.

3.43 WIRING TERMINAL – A terminal to which power supply or control connections are to be made in the field when the appliance is installed.

4 Types of Appliances

4.1 In the following text, a requirement that applies only to a specific type or types of appliances, such as a hand-supported hair dryer and a curling iron, is so identified by specific reference in that requirement to the type or types involved. Absence of such specific reference or use of the term "appliance" indicates that the requirement applies to all appliances covered by this standard.

4.2 An appliance that is a combination of two or more types (for example, an appliance having a hand-supported part and a counter-supported part) or an appliance that fits the definition of two or more types (for example, an appliance that can be used while supported by hand or while supported by countertop) is investigated in accordance with the applicable requirements for the types of appliances involved. If two requirements that address the same condition differ, the appliance is investigated to the more severe requirement.

CONSTRUCTION

5 Stands

5.1 An appliance such as a curling iron that can be placed on combustible material shall be provided with a stand made of material resistant to combustion, upon which the curling iron can be placed when not in use.

Exception No. 1: A stand is not required to be provided if the temperature attained on any external surface of the appliance that is likely to contact the supporting surface is not higher than 90°C (194°F).

Exception No. 2: A hand-supported hair dryer is not required to be provided with a stand.

5.2 If an appliance as described in 5.1 attains a temperature higher than 100°C (212°F) on an external surface that is likely to contact the supporting surface when operated continuously, it shall be provided with an integral stand. A stand provided for other types of appliances may be provided either as a separate device or integral with the appliance.

5.3 With respect to 5.2, an integral stand provided with an appliance shall be of such construction or shape that any surface of the appliance exceeding 150°C (302°F) does not contact the supporting surface when the appliance is supported by the stand in the intended manner.

5.4 A polymeric material employed as an integral stand in compliance with the requirements in 5.3 shall be rated for the temperature to which it will be subjected during use.

5.5 A heated-air curling iron or brush, as defined in 3.18, shall comply with the requirements applicable to hand-supported hair dryers and curling irons.

6 Hair Dryer Immersion Protection

6.1 A hand-supported, hair-drying appliance (such as a hair dryer, blower-styler, styler-dryer, heated-air comb, heated-air hair curler, curling iron/hair dryer combination, a wall-hung hair dryer or the hand unit of a wall-mounted hair dryer, or a similar appliance) shall be constructed to reduce the risk of electric shock when the appliance is energized with its power switch in either the "on" or "off" position and the unit is immersed in water having an electrically conductive path to ground.

6.2 With reference to 6.1, compliance may be accomplished with the use of an integral ground-fault circuit interrupter (GFCI), an integral immersion detection circuit interrupter (IDCI), or an integral protective device of another type that de-energizes all current-carrying parts when the hand-supported, hair-drying appliance is immersed in water having an electrically conductive path to ground (hereafter referred to as a protective device).

6.3 When a hand-supported, hair-drying appliance is provided with a GFCI, the GFCI shall comply with the requirements for Class A cord-connected GFCIs in the Standard for Ground-Fault Circuit-Interrupters, UL 943.

Exception: A GFCI located in the wall unit of a wall-mounted, permanently-connected hair dryer shall comply with the requirements for Class A, permanently-connected GFCIs in UL 943.

6.4 If a hand-supported, hair-drying appliance is provided with an IDCI, the IDCI shall comply with the Standard for Immersion-Detection Circuit-Interrupters, UL 1664. An IDCI is not required to provide protection under the condition that any power conductor is open-circuited. The combination of the hair dryer and the IDCI shall comply with the requirements specified in Immersion Detection Circuit Interrupters (IDCI's), Sections 25 and 45 – 47 and 74.13.1 and 78.7.

6.5 If a hand-supported, hair-drying appliance is provided with a protective device other than a GFCI or an IDCI, the protective device shall be acceptable for the application. Investigation of the protective device shall include and is not required to be limited to consideration of:

- a) Electrical rating;
- b) Operating temperatures;
- c) Reliability of operation;
- d) Resistance to the effects of abnormal operating conditions;
- e) Resistance to mechanical abuse;
- f) Resistance to electrical transients; and
- g) Resistance to moisture.

The combination of hair dryer and protective device shall comply with the test described in Immersion Detection Circuit Interrupters (IDCI) Trip Time Measurement, Section 45.

Exception: A protective device that complies with the requirements for Class A, cord-connected GFCIs in the Standard for Ground-Fault Circuit-Interrupters, UL 943, except that it does not have a grounding conductor, has a different type of power supply cord, or does not comply with the high-resistance ground-fault test under the condition that any power conductor is open-circuited (open-neutral protection not provided), is considered acceptable for the application. The combination of a hand-supported, hair-drying appliance and such a protective device is not required to be subjected to the test described in the Immersion Detection Circuit Interrupter (IDCI) Trip Time Measurement Test, Section 45.

6.6 A hand-supported, hair-drying appliance provided with a protective device as described in the Exception to 6.5 that has not been previously determined to provide protection when the neutral conductor on the load side of the device is grounded (a device not determined to have grounded neutral protection), is required only to be subjected to the trip time measurement test described in 45.1.1 – 45.1.7 using water with a resistivity of 200 ohm-cm.

6.7 A GFCI, IDCI, or other protective device shall be integral with the attachment plug of the hand-supported, hair-drying appliance power supply cord.

Exception No. 1: For a wall-mounted, permanently-connected hair dryer, the GFCI, IDCI, or other protective device may be located in the wall unit.

Exception No. 2: A GFCI, IDCI, or other protective device may be located in the power supply cord as a through cord construction or in the hair dryer enclosure after additional investigations with regard to acceptability after immersion, resistance to mechanical abuse, and the like.

6.8 A user-resettable protective device shall incorporate a supervisory circuit as described in Immersion Detection Circuit Interrupters (IDIC's), Section 25, for IDCIs or as described in the Standard for Ground-Fault Circuit-Interrupters, UL 943, for GFCIs.

Exception: A user-resettable protective device may be provided with a reset feature not providing a test function if:

- a) The protective device complies with the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991. If the computational investigation is conducted, the maximum predicted failure rate (λ_p) shall not exceed 1.5 failures per million hours predicted. If the demonstrated method is conducted, the test acceleration multiplier shall be 5763;*
- b) The instructions provided with the appliance alert the user to the reset feature and how and when to use it; and*
- c) The instructions provided with the appliance alert the user to not reset and reuse the appliance should the protective device trip as a result of immersion.*

6.9 A switch included for testing a user-resettable protective device shall be permanently marked "Test" and "Reset" on or adjacent to the switch actuators.

6.10 After a protective device de-energizes current-carrying parts, it shall not automatically reset.

7 Frame and Enclosure

7.1 General

7.1.1 The frame and enclosure of an appliance shall be sufficiently strong and rigid to resist the abuses likely to be encountered during service. The degree of resistance inherent in the appliance shall preclude total or partial collapse with the attendant reduction of spacings, loosening or displacement of parts, and other conditions which alone or in combination constitute an increase in the risk of fire, electric shock, or injury to persons.

7.1.2 Among the factors taken into consideration in evaluating an enclosure for acceptability are its:

- a) Physical strength;
- b) Resistance to impact;
- c) Moisture-absorptive properties;
- d) Combustibility;
- e) Resistance to corrosion; and
- f) Resistance to distortion at temperatures to which the enclosure may be subjected under conditions of normal or abnormal use.

For a nonmetallic enclosure, all these factors are considered with regard to thermal aging.

7.2 Polymeric enclosures

7.2.1 A polymeric enclosure shall comply with the applicable requirements in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C. A direct plug-in appliance shall comply with the requirements for unattended portable appliances in UL 746C.

7.3 Metal enclosures

7.3.1 The minimum thickness of a metal enclosure shall be as indicated in Table 7.1.

Table 7.1
Minimum thickness of enclosure metal

Metal	At small, flat, unreinforced surfaces and at surfaces that are reinforced by curving, ribbing, and the like (or are otherwise of a shape or size) to ensure adequate physical strength,		At surfaces to which a wiring system is to be connected in the field,		At relatively large unreinforced flat surface,	
	inch	(mm)	inch	(mm)	inch	(mm)
Die-cast	3/64	1.2	—	—	5/64	2.0
Cast malleable iron	1/16	1.6	—	—	3/32	2.4
Other cast metal	3/32	2.4	—	—	1/8	3.2
Uncoated sheet steel	0.026 ^a	0.66	0.032	0.81	0.026	0.66
Galvanized sheet steel	0.029 ^a	0.74	0.034	0.86	0.029	0.74
Nonferrous sheet metal	0.036 ^a	0.91	0.045	1.14	0.036	0.91

^a Thinner sheet metal may be used if found to be acceptable when the enclosure is judged under considerations such as those mentioned in 7.1.2.


7.4 Accessibility of live parts

7.4.1 To reduce the risk of unintentional contact that may involve a risk of electric shock from an uninsulated live part or film-coated wire, an opening in an enclosure shall comply with either (a) or (b).

- a) For an opening that has a minor dimension (see 7.4.5) less than 1 inch (25.4 mm), such a part or wire shall not be contacted by the probe illustrated in Figure 7.1.
- b) For an opening that has a minor dimension of 1 inch or more, such a part or wire shall be spaced from the opening as specified in Table 7.2.

Exception: A motor other than one used in either a hand-supported appliance or a hand-supported portion of an appliance is not required to comply with these requirements if it complies with the requirements in 7.4.2.

Figure 7.1
Articulated probe with web stop

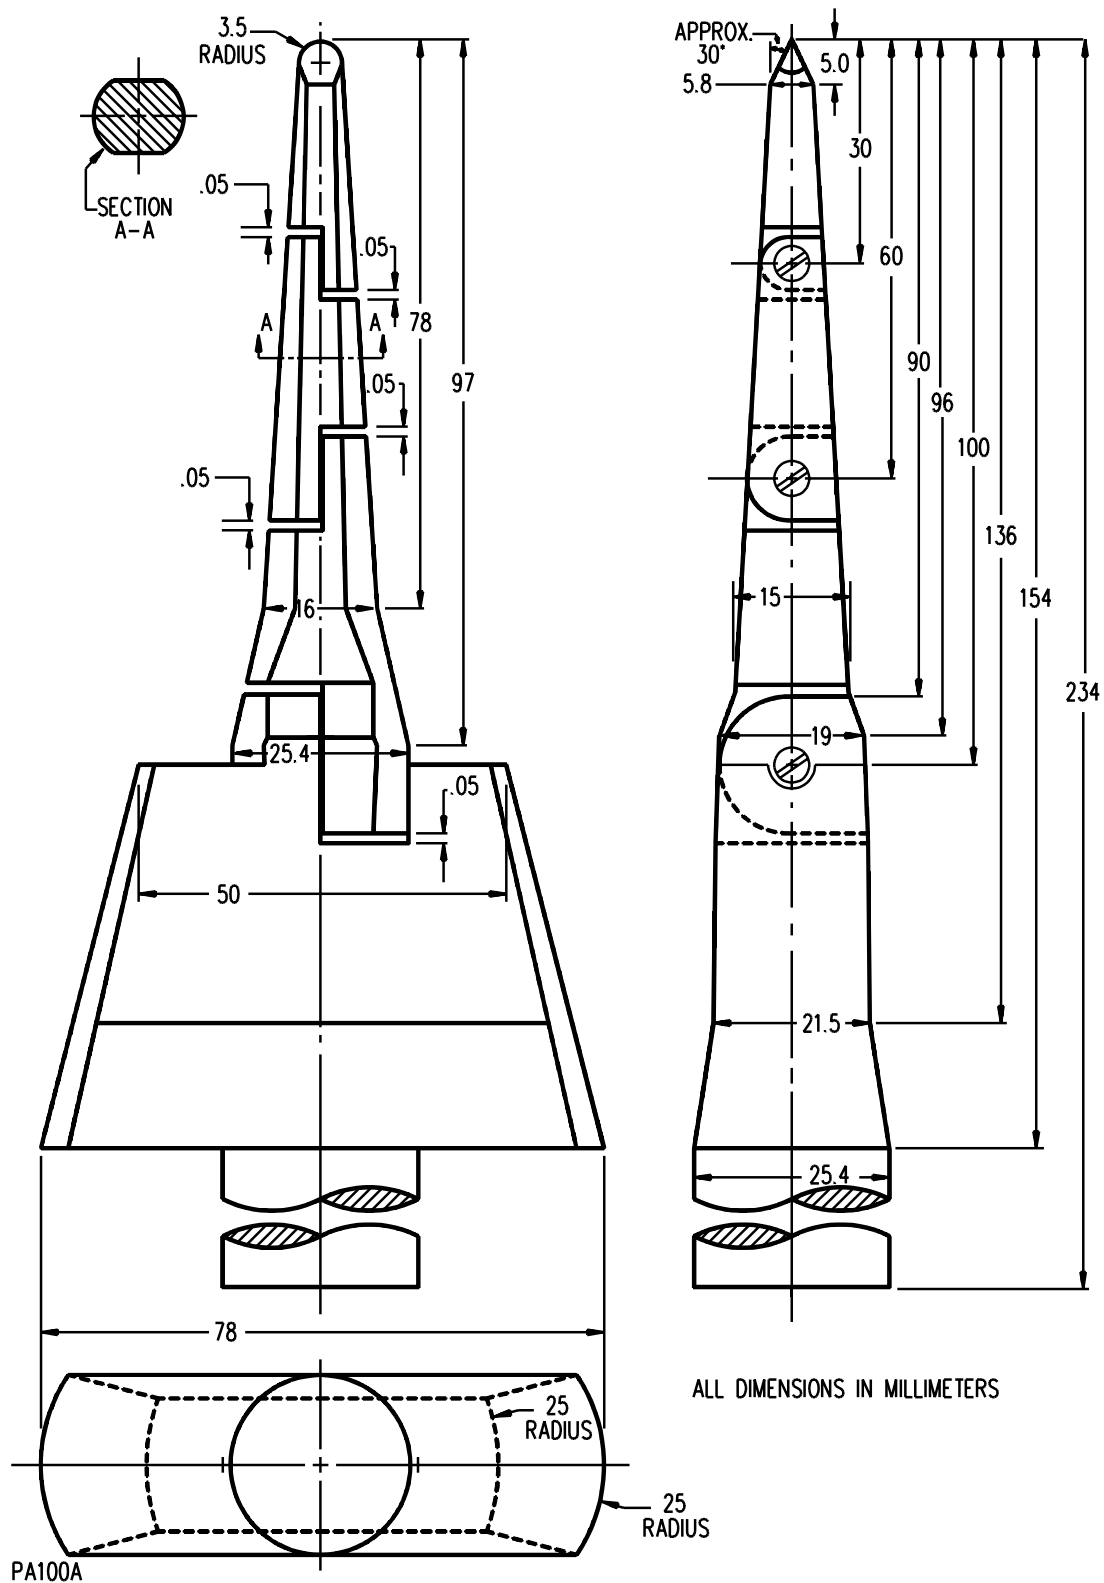

ALL DIMENSIONS IN MILLIMETERS

UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL



Documents

Document Sharing Hub

Table 7.2
Minimum distance from an opening to a part that may involve a risk of electric shock or injury to persons

Minor dimension ^{a,b} of opening,		Minimum distance from opening to part, ^b	
inches	(mm)	inches	(mm)
3/4 ^c	19.1	4-1/2	114.3
1 ^c	25.4	6-1/2	165.1
1-1/4	31.8	7-1/2	190.5
1-1/2	38.1	12-1/2	317.5
1-7/8	47.6	15-1/2	393.7
2-1/8	54.0	17-1/2	444.5
d	d	30	762.0

^a See 7.4.5.
^b Between 3/4 inch (19.1 mm) and 2-1/2 inches (63.5 mm), interpolation is to be used to determine a value between values specified in the table.
^c Any dimension less than 1 inch (25.4 mm) applies to a motor only.
^d More than 2-1/2 inches, but not more than 6 inches (152.4 mm).

7.4.2 Uninsulated live parts or film-coated wire of a motor as mentioned in the Exception to 7.4.1 shall comply with either (a) or (b).

a) For an opening with a minor dimension (see 7.4.5) less than 3/4 inch (19.1 mm):

- 1) Film-coated wire shall not be contacted by the probe illustrated in Figure 7.2;
- 2) In a directly accessible motor (see 3.9), an uninsulated live part shall not be contacted by the probe illustrated in Figure 7.3; and
- 3) In an indirectly accessible motor (see 3.20), an uninsulated live part shall not be contacted by the probe illustrated in Figure 7.4.

b) For an opening with a minor dimension of 3/4 inch or more, a part or wire shall be spaced from the opening as specified in Table 7.2.

7.4.3 The probes mentioned in 7.4.1 and 7.4.2 and illustrated in Figures 7.1 – 7.4 shall be applied to any depth that the opening will permit; and shall be rotated or angled before, during, and after insertion through the opening to any position that is necessary to examine the enclosure. The probes illustrated in Figures 7.1 and 7.3 shall be applied in any possible configuration; and, if necessary, the configuration shall be changed after insertion through the opening.

7.4.4 The probes mentioned in 7.4.1 and 7.4.2 shall be used as measuring instruments to judge the accessibility provided by an opening, and not as instruments to judge the strength of a material; they shall be applied with the minimum force necessary to determine accessibility.

Figure 7.2
Probe for film-coated wire

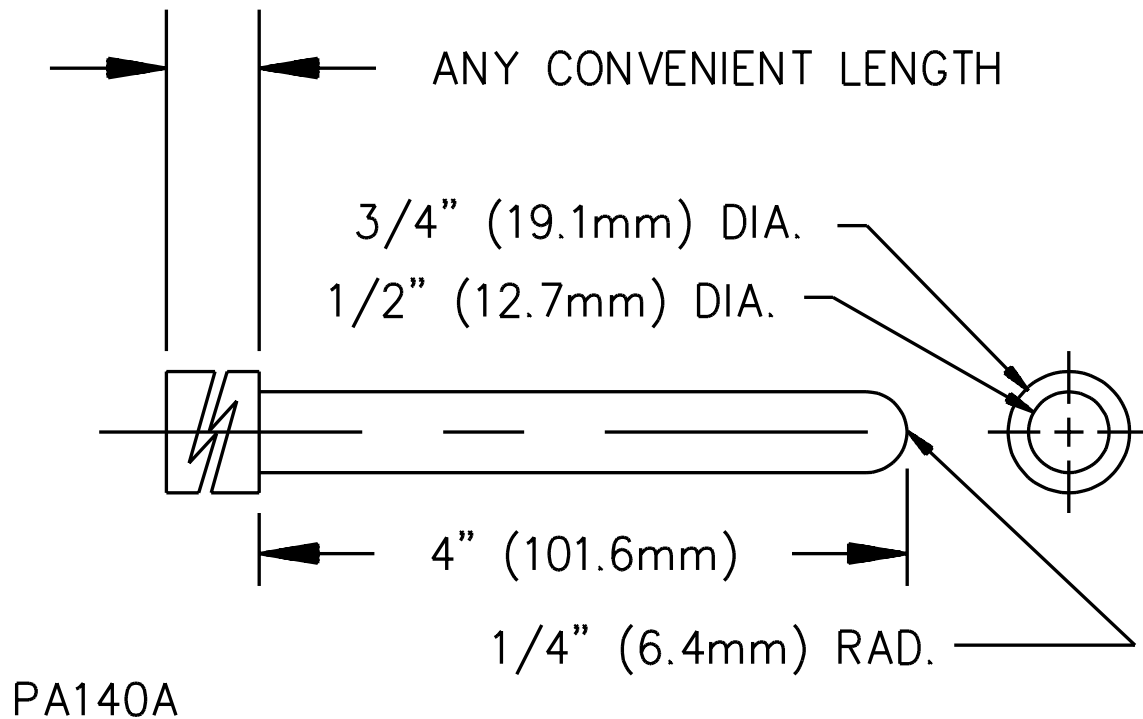


Figure 7.3
Articulated probe


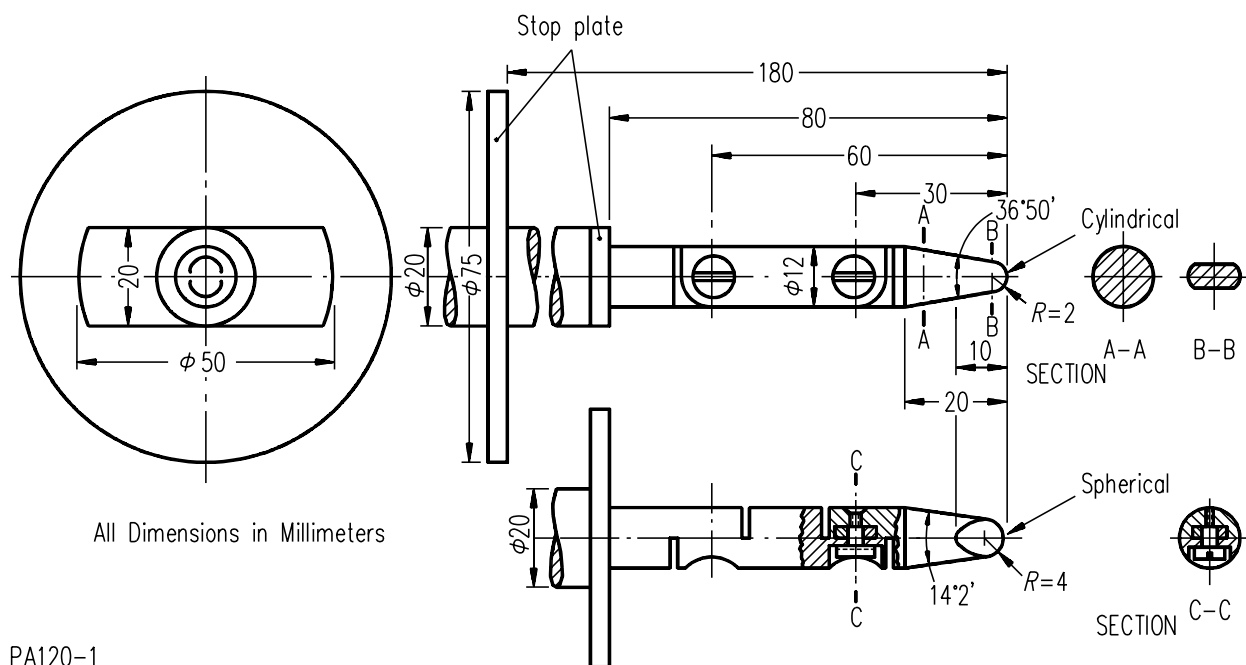


Figure 7.4
Probe for uninsulated live parts

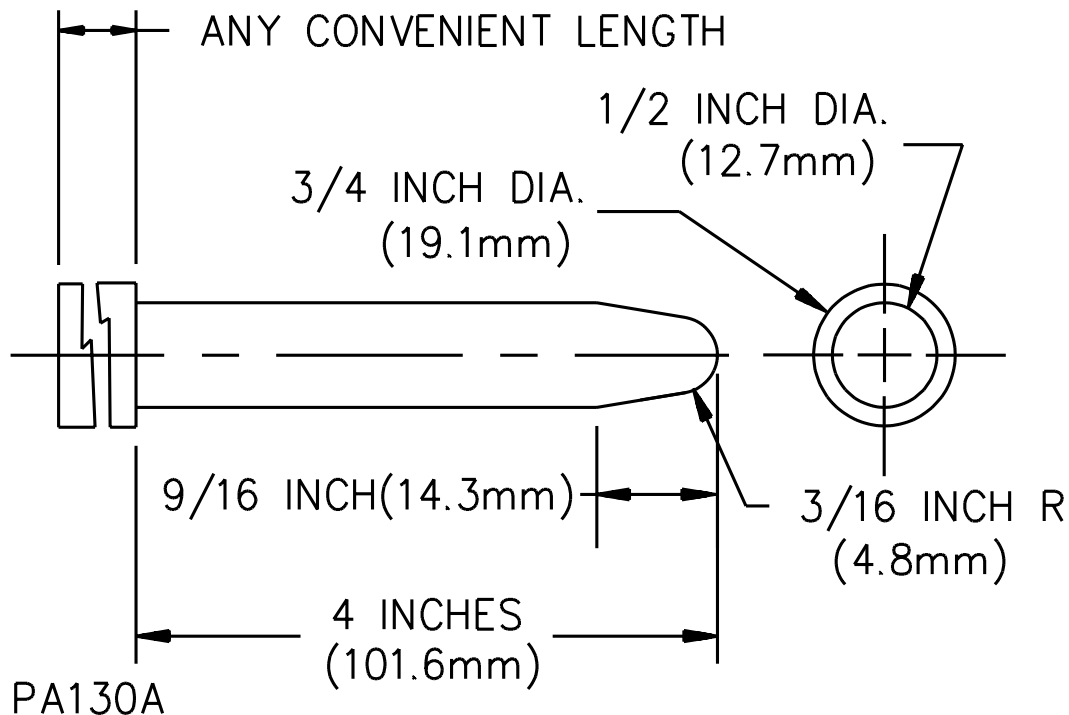

7.4.5 With reference to the requirements in 7.4.1 and 7.4.2, the minor dimension of an opening is the diameter of the largest cylindrical probe having a hemispherical tip that can be inserted through the opening.

7.4.6 During the examination of an appliance to determine whether it complies with the requirements in 7.4.1 or 7.4.2 a part of the enclosure that may be opened or removed by the user without using a tool (to attach an accessory, to make an operating adjustment, to replace a fuse, or for other reasons) is to be opened or removed.

7.4.7 With reference to the requirements in 7.4.1 and 7.4.2, insulated brush caps are not required to be additionally enclosed.

7.4.8 A live part of a limited-energy primary circuit is considered to require the same degree of protection against unintentional contact as is required of a live part of a line-voltage circuit.

7.5 Enclosure integrity

7.5.1 An area of an enclosure that is provided with a group of openings or with a guarded opening (such as a grille, louver, or screen) which may affect intended strength of the enclosure is to be subjected to the test described in 54.1.

7.5.2 The enclosure of a remotely or automatically controlled appliance shall prevent molten metal, burning insulation, flaming particles, or similar material from falling on combustible materials, including the surface upon which the appliance is supported.

No Text on This Page



7.5.3 The requirement in 7.5.2 requires the use of a barrier of material that is resistant to combustion:

a) Under a motor unless:

- 1) The structural parts of the motor or of the appliance provide the equivalent of such a barrier;
- 2) The protection provided with the motor is such that no burning insulation or molten material falls to the surface that supports the appliance when the motor is energized under each of the following fault conditions:
 - i) Main winding opened;
 - ii) Starting winding opened;
 - iii) Starting switch short-circuited; and
 - iv) For a permanent split capacitor motor, the capacitor short-circuited (the short circuit is to be applied before the motor is energized, and the rotor is to be locked); or
- 3) The motor is provided with a thermal motor protector (a protective device that is sensitive to temperature and current) that will prevent the temperature of the motor windings from becoming more than 125°C (257°F) under the maximum load under which the motor will run without causing the protector to cycle, and from becoming more than 150°C (302°F) with the rotor of the motor locked.

b) Under wiring, unless it is neoprene- or thermoplastic-insulated.

7.5.4 The requirement in 7.5.3 also requires that a switch, relay, solenoid, or similar part be individually and completely enclosed unless there is no opening in the bottom of the appliance enclosure, or it can be shown that malfunction of the component would not result in a risk of fire.

Exception: Terminals of a switch, relay, solenoid, or similar device is not required to be individually and completely enclosed.

7.5.5 The barrier mentioned in 7.5.3 shall be horizontal, shall be located as indicated in Figure 7.5 and shall have an area not less than that described in Figure 7.5. An opening for drainage, ventilation, or the like may be employed in the barrier when such an opening would not permit molten metal, burning insulation, or similar material to fall on combustible material.


7.6 Doors and covers

7.6.1 If a door or cover in an outer enclosure gives access to uninsulated live parts in a circuit (other than a low-voltage circuit), it shall be removable only with the use of tools or shall be provided with an interlocking mechanism. See 7.6.2, 7.6.6, and 7.6.7.

7.6.2 An interlocking mechanism complies with the requirements in 7.6.1 if it:

- a) Secures the cover in the closed position when engaged and
- b) Must be engaged before parts in the circuit can be energized.

Figure 7.5
Location and extent of barrier

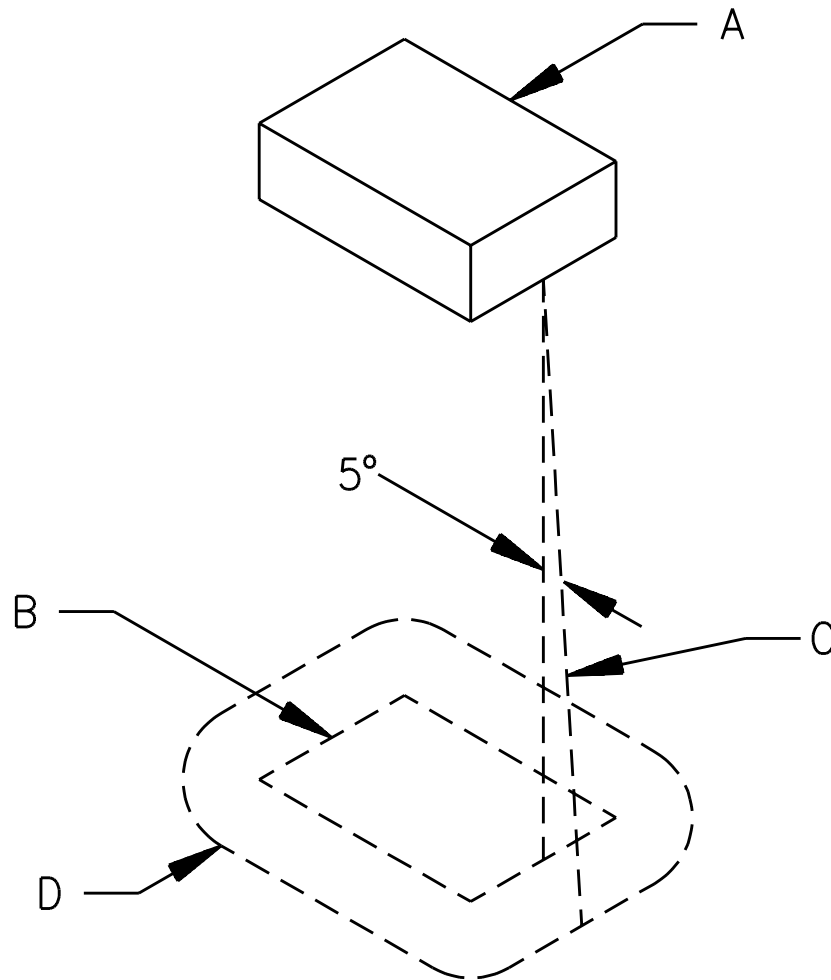

SA0604-1

A – Region to be shielded by barrier. This will consist of the entire component if it is not otherwise shielded, and will consist of the unshielded portion of a component that is partially shielded by the component enclosure or equivalent.

B – Projection of outline of component on horizontal plane.

C – Inclined line which traces out minimum area of barrier. The line is always:

- a) Tangent to the component,
- b) 5 degrees from the vertical, and
- c) Oriented so that the area traced out on a horizontal plane is maximum.

D – Location (horizontal) and minimum area for barrier. The area is that included inside the line of intersection traced out by the inclined line C and the horizontal plane of the barrier.

*UL COPYRIGHTED MATERIAL –
NOT AUTHORIZED FOR FURTHER REPRODUCTION OR
DISTRIBUTION WITHOUT PERMISSION FROM UL*



Documents
Document Sharing Hub

7.6.3 The assembly shall be arranged so that an overcurrent protective device such as a fuse, the intended protective functioning of which requires renewal, can be replaced and manual-reset devices can be reset without removal of parts other than the doors or covers and without removal of the cover or door enclosing the device.

7.6.4 A required protective device shall be accessible from outside the appliance only by opening a door or cover.

Exception: The operating handle of a circuit breaker, the operating button of a manually operable protector, and similar parts may project outside the enclosure.

7.6.5 A door or cover of an enclosure shall be hinged or attached in an equivalent manner if:

- a) It gives access to fuses or any motor overload protective device, the intended functioning of which requires renewal or
- b) It must be opened in connection with the intended operation of the protective device, such as the resetting of a manual reset overload protective device.

7.6.6 A required hinged cover shall not depend solely upon screws or similar means to hold it closed, but shall be provided with an automatic latch or the equivalent and shall be tight-fitting or shall overlap the surface of the enclosure around the opening.

7.6.7 Compliance with the requirements of 7.6.6 may be achieved by use of:

- a) A spring latch, a magnetic latch, a dimple, or equivalent mechanical arrangement that will hold the door in place and that will require some physical effort on the user's part to open or
- b) A cover interlocking mechanism, as described in 7.6.2 and provided as the sole means for securing the cover or panel.

7.7 Hanging and mounting means

7.7.1 A wall-hung or a wall-mounted appliance shall withstand a force as described in 55.1 without evidence of damage to the mounting surface, to the hanging means, to the mounting means, or to the appliance that results in the risk of electric shock, fire, or injury to persons.

7.7.2 A cord-connected appliance that is provided with keyhole slots, notches, hanger holes, or the like, for hanging the appliance on a wall, shall be provided with the necessary hardware for hanging the appliance in accordance with the installation instructions and constructed in such a manner that the hanging means (such as screws) shall not be accessible without removing the appliance from the supporting means.

7.7.3 When determining compliance with 7.7.2 any part of the enclosure or barriers that can be removed without the use of tools to gain access to the hanging means is to be removed.

7.7.4 A keyhole slot, notch, or hanger hole shall be located so that the supporting screws or the like cannot damage any electrical insulation or contact uninsulated current-carrying parts of the appliance.

7.7.5 A permanently installed wall-mounted appliance shall be provided with the necessary hardware for mounting in accordance with the installation instructions.

Exception: Small parts commonly available for the mounting of the appliance need not be provided if the installation instructions refer to such parts. See 77.4 for installation instructions.

8 Adhesives Used to Secure Parts

8.1 An adhesive that is relied upon to reduce a risk of fire, electric shock, or injury to persons shall comply with the requirements for adhesives in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

8.2 The requirement in 8.1 also applies to an adhesive used to secure a conductive part, including a nameplate, that may, if loosened or dislodged:

- a) Energize an accessible dead-metal part;
- b) Make a live part accessible;
- c) Reduce spacings below the minimum acceptable values; or
- d) Short-circuit live parts.

9 Reduction of Risk of Injury to Persons

9.1 General

9.1.1 Materials employed in the construction of the appliance that are depended upon for reduction of the risk of injury to persons shall have such properties as to meet the demand of intended loading conditions.

9.1.2 Asbestos shall not be used in the airstream of an appliance in such form, manner, or location that it can be dissipated outside the appliance.

9.1.3 A moving part that can cause a risk of injury to persons shall be enclosed or provided with other means to reduce the risk of unintentional contact therewith.

Exception: A part or portion of a part that is necessarily exposed to perform the working function is not required to be enclosed but, when necessary, guarding shall be provided.

9.1.4 With reference to the requirement in 9.1.3 the general construction and intended use of the appliance are to be considered in investigating a guard or enclosure. Among the factors to be taken into consideration in evaluating the acceptability of an exposed moving part are the degree of exposure, the sharpness of the moving part, and the risk of fingers, arms, hair, or clothing being drawn into the moving part (such as at points where gears mesh, where belts travel onto a pulley, or where moving parts close in a pinching or shearing action).

9.1.5 An appliance or any item furnished with the appliance shall have no sharp edge, burr, point, or spike inside or outside the appliance that may cause injury to persons during intended use and maintenance.

Exception: This requirement does not apply to a part or portion of a part needed to perform a working function.

9.1.6 Whenever referee measurements are necessary to determine that a part as mentioned in 9.1.5 is not sufficiently sharp to constitute a risk of injury to persons, the method described in the Standard for Tests for Sharpness of Edges on Equipment, UL 1439, is to be used.

No Text on This Page



9.1.7 A device that automatically starts an appliance, such as a timer, an automatically reset overload-protective device, or similar part, shall not be used unless it can be demonstrated that automatic starting will not result in a risk of injury to persons. See 74.6.1.

9.1.8 On an appliance adjustable for height, means shall be provided for holding the upper parts securely in position. Means shall also be provided to prevent the upper part from descending rapidly if the securing means, including a hydraulic or a pneumatic device, loosens or fails to operate as intended.

9.1.9 A hand-supported hair dryer shall have each air intake opening provided with a screen or equivalent means so that there are no openings larger than 0.004 square inch (2.58 mm²).

9.2 Appliances with reservoirs

9.2.1 An appliance in which liquid reaches a temperature greater than 115°F (46°C) shall comply with 9.2.2 – 9.2.4, 52.2, and the Tip-over Test, Section 53. See Figure 53.1.

Exception: A wax-depilatory appliance is not required to comply with these requirements. Such an appliance is to be the subject of an appropriate investigation.

9.2.2 The construction of the appliance shall be such as to reduce the risk of injury under conditions simulating intended use. Openings through which liquid can be emitted shall not be provided unless such openings are required to perform an operating function.

9.2.3 An appliance with a vessel or container that has a capacity of more than 32 fluid ounces (946 ml) shall be provided with a fully inserting or a lock-on lid.

9.2.4 If any part of an appliance requires assembly (for example, engagement of a twist-lock part), then improper assembly that might result in a risk of injury to persons shall be clearly visible to the user.

10 Protection of Service Personnel

10.1 The requirements in this section apply only to appliances of such size and complexity that it may be necessary for service personnel to reach over, under, across, or around uninsulated electrical parts or moving parts to perform service functions while the unit is energized.

10.2 Uninsulated parts that involve a risk of electric shock shall be located or protected so that unintentional contact with the parts is not likely during service operations involving other parts of the unit.

10.3 Moving parts that can cause injury to persons and that must be in motion during service operations not involving the moving parts shall be located or protected so that unintentional contact with the moving parts is not likely.

10.4 If a guard must be removed during servicing of a part involving a risk of electric shock or injury to persons, the guard shall be constructed and arranged so that it can be removed and replaced with a minimum of effort.

11 Mechanical Assembly

11.1 The assembly of an appliance that involves a motor or other vibrating unit shall be such that the appliance will not be affected adversely by the vibration of intended operation. Brush caps shall be tightly threaded or otherwise constructed to prevent loosening.

11.2 A switch (other than a through-cord switch), a lampholder, a receptacle, a motor-attachment plug, or similar component shall be mounted securely and shall be prevented from turning.

Exception No. 1: The requirement that a switch be prevented from turning can be waived if all the following conditions are met:

- a) The switch is of the plunger or other type that does not tend to rotate when operated (a toggle switch is considered to be subject to forces that tend to turn the switch during intended operation of the switch);*
- b) The means of mounting the switch is such that the operation of the switch is unlikely to result in the switch becoming loosened;*
- c) The spacings are not reduced below the minimum acceptable values if the switch does rotate; and*
- d) Intended operation of the switch is by mechanical means rather than by direct contact by persons.*

Exception No. 2: A lampholder of the type in which the lamp cannot be replaced (such as a neon pilot or indicator light in which the lamp is sealed in by a nonremovable jewel) need not be kept from turning if the rotation cannot reduce spacings below the minimum required values.

11.3 The means by which the turning mentioned in 11.2 is prevented shall include more than friction between surfaces. For example, a lock washer, properly applied, is acceptable as a means to prevent turning of a device having a single-hole mounting means.

11.4 Positive means shall be provided to keep parts of an appliance from turning with respect to each other if such turning would result in reduction of spacings, twisting of wires, and the like.

Exception: If such parts depend upon 3/8 inch (9.5 mm) or larger pipe threads, no additional means to prevent turning need be provided.

11.5 An appliance intended for connection to a supply of air, water, or the like shall have provisions for such connections. Field connections shall be possible without drilling, cutting, threading, or other alteration of the appliance. During the making of the field connections, internal wiring or electrical components shall not be subject to mechanical damage or stress.

11.6 An appliance that is shipped from the factory disassembled or unassembled to the degree necessary to facilitate shipment shall comply with all of the following:

- a) All parts shall be furnished by the manufacturer;
- b) Electrical continuity shall be maintained between field-assembled parts;
- c) The appliance shall be such that the field assembly can be accomplished without drilling, cutting, threading, or any alteration other than for permanent connection to the supply source;
- d) The assembly arrangement, location, and orientation of the separate parts shall be established at the time of manufacture and shall not be dependent on the installer.

11.7 A fastener that secures the insulating tip of a curling iron, a heated brush, or a similar appliance shall be constructed, fastened, or located so as to prevent the fastener from becoming loosened if such loosening can result in a risk of fire or electric shock.

11.8 Compliance with the requirement in 11.7 may be accomplished by use of:

- a) Staked and upset screws,
- b) Screws with properly applied lock washers,
- c) Press fitting of the insulating tip into place, or
- d) Other equivalent means.

A polymeric material relied upon to prevent the fasteners from loosening shall have acceptable mechanical strength, resistance to heat, and dimensional stability. All of these properties are to be considered with respect to thermal aging.

11.9 If any part of a metal spring of a hair clamp of a curling iron or a similar appliance can become loose inside the enclosure of electrical parts as a result of breakage of the spring, the construction shall be such that electrical spacings will not be reduced.

11.10 Compliance with the requirement in 11.9 may be accomplished by:

- a) Locating all parts of the spring outside the enclosure of electrical parts,
- b) Using barriers,
- c) Using physical restraints, or
- d) Using other equivalent means.

12 Stability

12.1 A floor- or counter-supported appliance shall be constructed such that it will not be overturned when tested in accordance with 52.1.

Exception: An appliance whose overturning during intended use will not present a risk of burns or injury to persons is not required to be tested.

12.2 With reference to 12.1 a hand-supported hair dryer provided with a stand for conversion into a counter-supported hair dryer is to be considered a hand-supported appliance and is not to be subjected to the stability test.

13 Corrosion Resistance

13.1 Iron and steel parts shall be made corrosion resistant by painting, galvanizing, plating, or other equivalent means if the malfunction of such unprotected parts would be likely to result in a risk of fire, electric shock, or injury to persons.

Exception No. 1: In certain instances in which the oxidation of iron or steel due to the exposure of the metal to air and moisture is not likely to be appreciable, thickness of metal and temperature also being factors, surfaces of sheet steel and cast-iron parts within an enclosure may not be required to be made corrosion resistant.

Exception No. 2: Bearings, laminations, or minor parts of iron or steel, such as washers, screws, and the like need not be made corrosion resistant.

13.2 A container for liquid shall be made resistant to the possible corrosive effect of the liquid intended to be used in the container.

14 Supply Connections

14.1 Permanently-connected appliances

14.1.1 An appliance intended for permanent connection to a power supply, either by being fastened in place, located in a dedicated space, or both, shall have provision for connection of one of the wiring systems that would be acceptable for the appliance.

Exception: If an appliance is not intended for permanent connection to a power supply, and yet is intended to be either fastened in place, located in a dedicated space, or both, it may be provided with a short length of flexible cord in accordance with 14.4.1 – 14.4.8 and with an attachment plug for supply connection. The investigation of such a feature will include consideration of the utility of the appliance and the reasons for having it detachable from its supply source by means of the attachment plug.

14.1.2 A knockout in a sheet-metal enclosure provided for connection of the appliance to a wiring system installed in accordance with the National Electrical Code, ANSI/NFPA 70, shall be securely attached and shall be removable without deformation that would impair the intended performance of the enclosure.

14.1.3 The diameter of a knockout shall be adequate to accommodate conduit of the trade size for which the knockout is intended as specified in Table 14.1.

14.1.4 There shall be a flat surface surrounding a knockout of sufficient area to accommodate attachment of a rigid metallic conduit of a size corresponding to the size of the knockout. The flat area shall have a minimum diameter in accordance with Table 14.1.

Table 14.1
Dimensions associated with knockouts for conduit

Trade size of conduit, inch (mm)		Unthreaded openings			
		Nominal knockout diameter, inches (mm)		Minimum diameter of flat surface at knockout, inches (mm)	
1/2	12.7	7/8	22.2	1.152	29.26
3/4	19.1	1-3/32	27.8	1.450	36.83
1	25.4	1-23/64	34.5	1.804	45.82

14.2 Field-wiring compartments

14.2.1 A field-wiring compartment in which power supply connections are to be made shall be located so that, during the making of electrical connections, the internal wiring and electrical components will not be exposed to mechanical abuse or stress; and, after the appliance has been installed as intended, such connections will be readily accessible for inspection.

14.2.2 Accessibility of field-installed wiring and inspection of splices is to be judged by:

- a) Conducting a trial installation following any instructions provided by the manufacturer or
- b) Using any wiring system permitted by the National Electrical Code, ANSI/NFPA 70, if no instructions are provided.

14.2.3 The minimum usable volume of an outlet box or terminal compartment in which field-installed wiring connections to the power supply are to be made shall be as specified in Table 14.2.

Exception: A motor containing an integral wiring compartment that complies with the Standard for Electric Motors, UL 1004, is not required to comply with this requirement.

Table 14.2
Minimum usable volume of terminal compartment

Size of field-installed conductors, AWG		Volume for each field-installed wire originating outside of the compartment and terminating inside the compartment, ^a	
	(mm ²)	cubic inches	(cm ³)
14	2.1	2.00	33
12	3.3	2.25	37
10	5.3	2.50	41
8	8.4	3.00	50
6	13.3	5.00	82

^a Including a grounding conductor.

14.2.4 There shall be sufficient space within the enclosure for the installation of wires and cables likely to be used when connecting the supply circuit to the equipment.

14.2.5 In the investigation of wiring spaces, it is assumed that the size, type, and conductor material of a wire to be used for installation of wiring connection shall be in accordance with the National Electrical Code, ANSI/NFPA 70.

14.2.6 Wire-bending space when the conductor does not enter or leave the enclosure through the wall opposite its terminal shall be as specified in Table 14.3.

14.2.7 Wire-bending space when the conductor enters or leaves the enclosure through the wall opposite its terminal shall be as specified in Table 14.4.

14.2.8 If a conductor is restricted by a barrier or other means from being bent where it leaves the connector, the distance is to be measured from the end of the barrier.

Table 14.3
Minimum wire-bending space, inches

Wire size, AWG	Wires per terminal (pole)	
	1	2
14 – 10	Not specified	Not specified
8 – 6	1-1/2 inches	–

NOTES

1 For SI units: 1 inch = 25.4 millimeters.

2 Wire-bending space at terminals shall be measured in a straight line from the center of the wire opening, in the direction the wire leaves the terminal, to the wall, barrier or obstruction. (For instructions on measuring, see 14.2.9.)

3 The minimum wire-bending space required for wire sizes or combinations of wires not covered will be determined by investigation.

Table 14.4
Minimum wire-bending space, inches

Wire size, AWG	Wires per terminal (pole)	
	1	2
14 – 10	Not specified	Not specified
8	1-1/2 inches	–
6	2 inches	–

NOTES

1 For SI units: 1 inch = 25.4 millimeters.

2 Wire-bending space at terminals shall be measured in a straight line from the edge of the terminal closest to the wall, in a direction perpendicular to the enclosure wall. (For instructions on measuring, see 14.2.9.)

3 The minimum wire-bending space required for wire sizes or combinations of wires not covered will be determined by investigation.

14.2.9 For a wire-bending space measurement, the lug or connector is to be at the smallest angle to the perpendicular to the box wall that it can assume without defeating any means provided to prevent its turning (such as a boss, shoulder, walls of a recess, multiple bolts securing the connector, and the like). However, it is assumed that the connector is not so oriented that the wire will be directed into a corner of the box to such extent that the transverse wall would necessitate additional bending. If the terminal is provided with one or more lugs or connectors for the connection of conductors in multiple, the distance is to be measured from the wire opening closest to the wall of the enclosure. If the connectors for a circuit are fixed in position (for example, by the wall of a recess) so that they are turned toward each other, the distance is to be measured at the wire opening nearest to the wall in a direction perpendicular to the wall. A barrier, shoulder, or the like is to be disregarded when the measurement is being made if it does not reduce the radius to which the wire must be bent otherwise.

14.2.10 A wiring space in which knockouts are provided shall be of such a width as to accommodate (with respect to bending) conductors of the maximum size likely to be used at that knockout.

Exception: The wiring space may be of lesser width when:

- a) Knockouts of required size are provided elsewhere in the equipment;*
- b) The wiring space at such other point or points is sufficiently wide to accommodate the conductors in question; and*
- c) The knockout or knockouts at such other points can be conveniently used in the intended wiring of the appliance.*

The values of the minimum acceptable width of a wiring space, with respect to conductors entering the knockout, are the same as the values of minimum bending space given in Table 14.3.

14.2.11 An electrical component shall not be mounted on a part, such as the cover of a wiring-terminal compartment, that must be moved so that field-wiring connections can be made or inspected.

14.2.12 A field-wiring compartment intended for connection of a supply raceway and mounted integrally with the appliance shall be attached so as to be kept from turning with respect to the appliance.

14.2.13 If the constructional features of an appliance are such that field-wiring connections can be made in the motor terminal compartment, the compartment shall comply with the applicable requirements for electric motors.

14.3 Wiring terminals and leads

14.3.1 An appliance intended for permanent connection to the power supply shall be provided with wiring terminals, including an equipment grounding terminal, for the connection of conductors having an ampacity acceptable for the appliance; or the appliance shall be provided with leads acceptable for such connection.

14.3.2 A wiring terminal shall be provided with a soldering lug or with a pressure terminal connector securely fastened in place (for example, firmly bolted or held by a screw).

Exception: A wire-binding screw may be used at a wiring terminal intended to accommodate a 10 AWG (5.3 mm²) or smaller conductor if upturned lugs or a cupped washer or the equivalent are provided to hold the wire in position.

14.3.3 Upturned lugs or a cupped washer or the equivalent shall be capable of retaining the conductor mentioned in 14.3.1 under the head of the screw or the washer.

14.3.4 A wiring terminal shall be prevented from turning or shifting in position by means other than friction between surfaces. This may be accomplished by two screws or rivets; by square shoulders or mortices; by a dowel pin, lug or offset; by a connecting strap or clip fitted into an adjacent part; or by an equivalent means.

14.3.5 A wire-binding screw at a wiring terminal shall not be smaller than No. 10 (4.8 mm).

Exception: A No. 8 (4.2 mm) screw may be used at a terminal intended only for the connection of a 14 AWG (2.1 mm²) conductor, and a No. 6 (3.5 mm) screw may be used for the connection of a 16 AWG (1.3 mm²) or 18 AWG (0.82 mm²) control-circuit conductor.

14.3.6 A terminal plate tapped for a wire-binding screw shall be of metal not less than 0.050 inch (1.27 mm) thick. There shall be two or more full threads in the metal, which may be extruded if necessary to provide the threads.

Exception: A plate less than 0.050 inch thick, but not less than 0.030 inch (0.762 mm) thick, may be used if the tapped threads are determined to have equivalent mechanical strength.

14.3.7 A wire-binding screw shall thread into metal.

14.3.8 An appliance intended for connection to a grounded power supply conductor and employing:

- a) A lampholder of the Edison screw-shell type;
- b) A single-pole switch; or
- c) A single-pole, automatic control

shall have one terminal or lead intended for connection of the grounded conductor of the supply circuit. The terminal or lead intended for grounded connection shall be the one that is connected to the screw shell of a lampholder and shall have no connection to a single pole switch or single pole automatic control.

Exception: With respect to connection of a single pole automatic control, the requirements in 31.1 shall apply.

14.3.9 With reference to 14.3.8, if leads from a motor or other component terminate in an attachment plug intended for insertion in a receptacle that is:

- a) Provided as part of the appliance and
- b) Intended for connection of the branch-circuit power supply conductors,

the plug and receptacle shall be polarized if a single-pole switch or an Edison-base lampholder is connected in the load side of these devices.

14.3.10 A terminal intended for the connection of a grounded circuit conductor shall be made of or plated with a metal substantially white in color and shall be readily distinguishable from the other terminals, or identification of that terminal shall be clearly shown in some other manner, such as on an attached wiring diagram.

14.3.11 A lead intended for field connection shall comply with the following:

- a) The lead shall be not smaller than 18 AWG (0.82 mm²);
- b) The insulation thickness shall comply with Table 14.5; and
- c) The free length of the lead inside an outlet box or wiring compartment shall be at least 6 inches (152 mm).

14.3.12 The exterior surface of a lead intended for field connection shall be white or grey, and that lead shall be readily distinguishable from other leads.

No Text on This Page



Table 14.5
Characteristics of leads intended for field connection

Insulation	Nominal wall thickness of insulation,		Braid or jacket required	Nominal thickness of braid or jacket,	
	inch	(mm)	inch	(mm)	
Thermoplastic or neoprene	1/32 ^a	0.8	No ^a	—	—
Rubber	1/32 ^b	0.8	Yes ^a	1/64 ^a	0.4
Cross-linked synthetic polymer ^c	1/64	0.4	No	—	—
^a The nominal wall thickness may be less than 1/32 inch but not less than 1/64 inch if the wire is provided with a braid or jacket having a nominal thickness not less than 1/64 inch. ^b For heat-resistant rubber other than of a silicone type, the nominal wall thickness is to be not less than 3/64 inch (1.2 mm) and no braid is required. ^c Synthetic compounds other than neoprene or rubber, such as that used on Type XHHW wire.					

14.3.13 The exterior surface of an insulated lead intended solely for the connection of an equipment-grounding conductor shall be green with or without one or more yellow stripes, and no other lead shall be so identified.

14.3.14 A wire-binding screw intended for the connection of an equipment grounding conductor shall have a green-colored head that is hexagonal, or slotted, or both. A pressure wire connector intended for connection of such a conductor shall be plainly identified by the marking "G," "GR," "GND," "Grounding," or the like on or adjacent to the terminal or by a marking on the wiring diagram provided on the appliance. The wire-binding screw or pressure wire connector shall be so located that it is unlikely to be removed during servicing of the appliance.

14.4 Cord-connected appliances

14.4.1 An appliance intended for cord connection shall be provided with a length of flexible cord and an attachment plug for connection to the supply circuit. A coiled cord may be used in a hand-supported or wall-hung appliance. A coiled cord may also be used in a floor- or counter-supported appliance if such usage will not result in a condition (for example, the appliance being pulled off a table by the force of the cord) likely to present a risk of burn, electric shock, fire, or injury to persons. The cord length is to be measured from the point of cord entry into the enclosure, or into the wiring device at the attachment plug and shall be within the limits specified in Table 14.6.

14.4.2 If a coiled cord is used, the cord length shall comply with Table 14.6 when the cord is in the uncoiled position.

14.4.3 The flexible cord may be permanently attached to the appliance; or, for other than a hand-supported appliance, in the form of a detachable power supply cord with means for connection to the appliance. Examples of the means for connection are:

- a) An appliance plug;
- b) A flatiron plug; or
- c) A cord connector cooperating with pin or blade terminals on the appliance.

Table 14.6
Cord lengths for specific conditions

Type of appliance	Cord length			
	Minimum,		Maximum,	
	feet	(m)	feet	(m)
Appliance supported by table or counter top	5	1.52	8	2.44
Wall-hung appliance with attached appliance supported by hand	10 ^a	3.05	12 ^a	3.66
	2 ^b	0.61	3 ^b	0.91
Appliance usually supported by hand	10	3.05	12	3.66
Hair dryer, floor-supported	3 ^c	0.91	9	2.74
All appliances not covered above	6	1.83	8	2.44
^a Between wall unit and hand unit. ^b Between wall unit and receptacle. ^c If the cord entry point is higher than 2 feet (0.61 m) above the floor, one additional foot (0.3 m) is to be added to the minimum cord length for each additional foot that the cord entry point is located above the floor, or fraction thereof, up to a maximum cord length of 6 feet (1.83 m).				

14.4.4 The ampacity of the cord and of the plug shall be not less than the current rating of the appliance. Such components shall be rated for use at a voltage equal to the rated voltage of the appliance.

14.4.5 With respect to 14.4.4, the voltage rating of a dual voltage appliance is considered to be that for which the appliance is set when it is shipped from the factory.

14.4.6 The flexible cord shall be of a type indicated in Table 14.7 or the equivalent.

14.4.7 The attachment plug of a cord-connected appliance and the integral blades of a direct plug-in appliance provided with a 15- or 20-ampere, general-use receptacle shall be of the 3-wire grounding type. The attachment plug and the integral blades of all other cord-connected and direct plug-in appliances provided with either a line-connected, single-pole on-off switch or overcurrent protective device, or an Edison-base lampholder shall be polarized or of the grounding type.

14.4.7 revised July 30, 2001

14.4.8 Connections of the flexible cord conductors to a 2- or 3-wire polarized attachment plug shall be as illustrated in Figure 14.1. The polarity identification of the flexible cord shall comply with Table 14.8.