



UL 73

STANDARD FOR SAFETY

Motor-Operated Appliances

UL Standard for Safety for Motor-Operated Appliances, UL 73

Tenth Edition, Dated March 2, 2011

Summary of Topics

This revision of ANSI/UL 73, dated March 18, 2025, includes the addition of leakage current test option for stationary commercial shoe coating machines, [42.1A](#) and [42.1B](#).

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The new requirements are substantially in accordance with Proposal(s) on this subject dated February 7, 2025.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

MARCH 2, 2011
(Title Page Reprinted: March 18, 2025)



ANSI/UL 73-2025

1

UL 73

Standard for Motor-Operated Appliances

First Edition – April, 1937
Second Edition – April, 1958
Third Edition – December, 1960
Fourth Edition – February, 1967
Fifth Edition – January, 1972
Sixth Edition – August, 1978
Seventh Edition – September, 1986
Eighth Edition – April, 1993
Ninth Edition – December, 2004

Tenth Edition

March 2, 2011

This ANSI/UL Standard for Safety consists of the Tenth Edition including revisions through March 18, 2025.

The most recent designation of ANSI/UL 73 as an American National Standard (ANSI) occurred on March 18, 2025. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

The Department of Defense (DoD) has adopted UL 73 on May 11, 1976. The publication of revised pages or a new edition of this Standard will not invalidate the DoD adoption.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

© 2025 ULSE Inc. All rights reserved.

No Text on This Page

CONTENTS

INTRODUCTION

1	Scope	9
2	Glossary	9
3	Units of Measurement	11
4	References	11

CONSTRUCTION

5	General	11
6	Components	12
6.1	General	12
6.2	Attachment plugs, receptacles, connectors, and terminals	13
6.3	Batteries and battery chargers	14
6.4	Boxes and raceways	15
6.5	Capacitors and filters	15
6.6	Controls	15
6.7	Cords, cables, and internal wiring	18
6.8	Cord reels	19
6.9	Film-coated wire (magnet wire)	19
6.10	Gaskets and seals	19
6.11	Ground-fault, arc-fault, and leakage current detectors/interrupters	19
6.12	Heaters and heating elements	20
6.13	Insulation systems	20
6.14	Light sources and associated components	20
6.15	Marking and labeling systems	21
6.16	Motors and motor overload protection	21
6.17	Overcurrent protection	23
6.18	Polymeric materials and enclosures	24
6.19	Power supplies	24
6.20	Printed wiring boards	24
6.21	Semiconductors and small electronic components	25
6.22	Supplemental insulation, insulating bushings, and assembly aids	25
6.23	Switches	26
6.24	Transformers	27
6.25	Valves (electrically operated) and solenoids	27
6.26	Video and audio components	27
7	Frame and Enclosure	28
8	Adhesives Used to Secure Parts	31
9	Mechanical Assembly	32
10	Protection Against Corrosion	33
11	Accessibility of Uninsulated Live Parts and Film-Coated Wire	33
12	Supply Connections	39
12.1	General	39
12.2	Cord-connected appliances	39
12.3	Permanently connected appliances	45
13	Current-Carrying Parts	46
14	Electrical Insulation	47
15	Internal Wiring	47
15.1	Mechanical protection	47
15.2	Splices and connections	48
16	Tabs Used in Electrical Quick-Connect Terminals	49
16.1	General	49



16.2	Material requirements	49
16.3	Dimensional requirements	49
17	Separation of Circuits	55
18	Capacitors	55
19	Grounding	56
19.1	General.....	56
19.2	Grounding identification	57
20	Heating Elements	57
21	Lampholders.....	58
21A	Lamps that Emit Ultraviolet (UV) Radiation.....	58
22	Motors	58
22.1	Construction.....	58
22.2	Brush wear out	58
22.3	Overload protection	59
22.4	Insulation systems	60
23	Overload- or Thermal-Protective Devices	61
24	Arc-Fault, and Leakage Current Detectors / Interrupters	62
25	Receptacles.....	62
26	Switches and Controls	63
27	Controls – End Product Test Parameters	64
27.1	General.....	64
27.2	Auxiliary controls	64
27.3	Operating controls (regulating controls)	64
27.4	Protective controls (limiting controls)	66
27.5	Controls using a temperature sensing device	67
28	Spacings	67
29	Spacings On Printed Wiring Boards	69
30	Components Used in Automatic Solar Cleaning Systems	69
31	Flooding of Live Parts	71

PROTECTION AGAINST INJURY TO PERSONS

32	General	71
33	Sharp Edges	72
34	Enclosures and Guards	72
35	Materials.....	73
36	Rotating or Moving Members.....	73
37	Parts Subject to Pressure.....	74
38	Pressure-Relief Devices	75
39	Switches, Controls, and Interlocks	76
40	Specific Appliances	77
40.1	Self-propelled appliance.....	77
40.2	Recessed ultrasonic cleaner.....	77
40.3	Commercial trash compactors and bailers	78
41	Stability	78
41A	Protection from Overexposure to Ultraviolet (UV) Radiation.....	79

PERFORMANCE

42	Leakage Current Test	79
43	Leakage Current Test Following Humidity Conditioning	82
44	Starting Current Test.....	82
45	Input Test.....	82
46	Temperature Tests.....	83
46.1	General.....	83
46.2	Maximum normal load.....	86

47	Surface Temperature Tests	86
47.1	Exterior surfaces.....	86
47.2	Contact surfaces.....	87
48	Dielectric Voltage-Withstand Test	87
49	Continuous Operation Test.....	88
50	Resistance-to-Moisture Test.....	88
50.1	Water spray test	88
50.2	Flooding of live parts	92
50.3	Automatic solar panel cleaning systems – flooding overflow test.....	92
50.4	Flooding overflow test for recessed ultrasonic cleaners.....	92
50.5	Flooding immersion test for recessed ultrasonic cleaners.....	93
51	Tests on Switches and Controls	93
52	Puncture Test for Recessed Ultrasonic Cleaners.....	94
53	Strain-Relief Test.....	94
54	Abnormal Operation Test	95
54.1	General.....	95
54.2	Electronic components.....	95
55	Abnormal Operation Tests for Recessed Ultrasonic Cleaners	96
55.1	General.....	96
55.2	Electronic components.....	96
55.3	Dry operation test	96
55A	Rechargeable and Automatic Flashlights and Lanterns	96
56	Radiation Test	97
57	Ozone Test	97
58	Operational Test.....	98
59	Permanence of Marking Test.....	98
60	Permanence of Cord Tag Test	98
60.1	General.....	98
61	Solenoids	99
62	General Purpose Transformers	100
62.1	General.....	100
62.2	Voltage measurement test.....	100
62.3	Overload test.....	100
62.4	Repeated dielectric voltage-withstand test.....	101
63	Thermoplastic Motor Insulation Systems	101
63.1	General.....	101
63.2	Abnormal conditioning.....	101
63.3	Overload-burnout conditioning.....	101
63.4	Thermal aging	102
64	Electrically Operated Valves (Class 2) for Use in Automatic Solar Panel Cleaning Systems... 104	
64.1	Torque test	104
64.2	Hydrostatic strength test.....	104
64.3	Burnout test.....	105
65	Interlock System Endurance Test – Recessed Ultrasonic Cleaners and Commercial Trash Compactors and Bailers	105
66	Polymeric Enclosure Mechanical Resistance – Recessed Ultrasonic Cleaners.....	105
66.1	Crushing resistance test.....	105
66.2	Resistance to impact test	105
66A	Ultraviolet Irradiance Test	106

MANUFACTURING AND PRODUCTION TESTS

67	Dielectric Voltage-Withstand Test	107
68	Grounding Continuity Test.....	108

RATING

69	Details	109
----	---------------	-----

MARKING

70	Details	109
70.1	General	109
70.2	Permanently connected appliances	112
70.3	Cord-connected appliances	113
70.4	Carbonators	113
70.5	Insect-exterminating appliances	113
70.6	Outdoor use insect and rodent control equipment	114
70.7	Components	114
70.8	Outdoor-use appliance	114
70.9	Double-insulated appliances	114
70.10	Rechargeable and automatic flashlights and lanterns	114
70.11	Markings for insect and rodent-control equipment which emit ultraviolet (UV) radiation	114

INSTRUCTION MANUAL

71	General	115
72	Instructions pertaining to risk of fire, electric shock, or injury to persons	116
73	Installation instructions	118
74	Operating instructions	121
74.5	Rechargeable and automatic flashlights and lanterns	122
75	User-Maintenance Instructions	122
75A	Instructions for Insect and Rodent-Control Equipment Generating Ultraviolet Radiation	122

PROTECTION FROM CONTAMINATION

76	Scope	123
77	Construction	123
78	Performance	123
79	Marking	123

DIRECT PLUG-IN INSECT AND RODENT CONTROL APPLIANCES

80	General	124
81	Construction	124
82	Performance	129
83	Markings	129

SUPPLEMENT SA – UL 60335-1 BASED REQUIREMENTS FOR THE EVALUATION OF ELECTRONIC CIRCUITS**INTRODUCTION**

SA1	Scope	131
SA2	General	131
SA3	Glossary	131

CONSTRUCTION

SA4	Components.....	132
SA4.1	Capacitors	132
SA4.2	Isolation devices	132
SA4.3	Printed wiring boards.....	132
SA4.4	Switch mode power supplies	132
SA5	Identification of Safety Critical Circuit Functions	133
SA5.1	General	133
SA5.2	Protective electronic circuits.....	133
SA6	Evaluation of the Different Types of Electronic Circuits.....	133
SA6.1	All types of circuits.....	133
SA7	Circuits that provide Safety Critical Functions.....	134

PERFORMANCE

SA8	General Conditions for the Tests	134
SA8.1	Details.....	134
SA8.2	Intentionally weak parts	135
SA8.3	Test results determined by overcurrent protection operation	135
SA9	Low-Power Circuits.....	135
SA9.1	Low-power circuit determination	135
SA10	Abnormal Operation, Fault, Low-power, and Switch mode tests.....	136
SA10.1	Abnormal operation and fault tests.....	136
SA10.2	Low-power circuit fire tests.....	138
SA10.3	Switch mode power supply overload test.....	138
SA11	Programmable Component Reduced Supply Voltage Test.....	138
SA12	Electromagnetic Compatibility (EMC) Requirements – Immunity.....	139

MANUFACTURING AND PRODUCTION LINE TESTING

SA13	General.....	140
------	--------------	-----

SUPPLEMENT SB – COMMERCIAL ULTRAVIOLET (UV) GERMICIDAL APPLIANCES – CONTAINED UV SOURCES**INTRODUCTION**

SB1	Scope	141
SB2	Glossary	141

CONSTRUCTION

SB3	Components.....	142
SB4	Enclosures	142

PROTECTION AGAINST INJURY TO PERSONS

SB5	Photobiological Hazards.....	142
SB5.1	General	142
SB5.2	Equipment safeguards – interlocks	143
SB6	Ozone Assessment.....	144

PERFORMANCE

SB7	Ultraviolet (UV) Irradiance Test	144
SB8	Abnormal Operation Test.....	144
SB9	Glass Impact Test	145

MARKING

SB10	General.....	146
------	--------------	-----

INSTRUCTION MANUAL

SB11	General.....	147
------	--------------	-----

INTRODUCTION

1 Scope

1.1 These requirements cover motor-operated appliances to be employed in accordance with the National Electrical Code, NFPA 70.

1.2 These requirements also cover small utilization appliances, such as vibrators in which motion of an operating part is produced by electrical means.

1.3 These requirements do not cover appliances rated more than 600 V; nor do they cover appliances involving universal motors rated more than 250 V.

1.4 These requirements do not cover equipment intended particularly for the control of electric motors; separator motors; nor electric clocks, fans, clothes dryers, washing machines, hair dryers, tools, waste disposers, dishwashers, office appliances and business equipment, refrigerators, air conditioners, vending and amusement machines, hair clippers and shavers, snow movers, automotive and garage equipment, or other motor-operated appliances that are covered by individual requirements.

1.5 An appliance that utilizes some other source of energy, such as gas or steam, in addition to electric energy will be investigated under these requirements and under such additional requirements as are applicable to the appliance under consideration.

1.6 Manually operated die-cutting machines without electrical parts need only comply with the following applicable requirements. Industrial machines of this type are not addressed by these requirements.

- a) Protection Against Injury to Persons – Sections [32](#) – [36](#) and [41](#);
- b) Performance – Section [58](#);
- c) Markings – [70.1](#) (excluding electrical rating); and
- d) Instruction Manual – Section [71](#).

1.7 *Deleted*

2 Glossary

2.1 For the purpose of this standard the following definitions apply.

2.2 **APPLIANCE COUPLER** – A single-outlet, female contact device for attachment to a flexible cord as part of a detachable power-supply cord to be connected to an appliance inlet (motor attachment plug).

2.3 **APPLIANCE INLET (MOTOR ATTACHMENT PLUG)** – A male contact device mounted on an end product appliance to provide an integral blade configuration for the connection of an appliance coupler or cord connector.

2.4 **APPLIANCE (FLATIRON) PLUG** – An appliance coupler type of device having a cord guard and a slot configuration specified for use with heating or cooking appliances.

2.5 **AUTOMATIC SOLAR PANEL CLEANING SYSTEM** – a household or commercial, outdoor use cleaning system primarily comprised of an irrigation controller, motor-operated water pump, electrically operated zone valves, and water nozzles. The system is intended to be hose-connected to a water supply rated less than 100 psig, and the water nozzles and associated zone valves are intended for a flow rate

ground installation near the solar panels. No other electrical equipment of the system is intended for roof mounting.

2.6 AUTOMATICALLY CONTROLLED APPLIANCE – An appliance is considered to be automatically controlled if:

- a) The repeated starting of the appliance, beyond one complete predetermined cycle of operation to the point where some form of limit switch opens the circuit, is independent of any manual control;
- b) During any single predetermined cycle of operation, the motor is caused to stop and restart one or more times;
- c) Upon energizing the appliance, the initial starting of the motor may be intentionally delayed beyond normal, conventional starting; or
- d) During any single predetermined cycle of operation, automatic changing of the mechanical load may reduce the motor speed sufficiently to reestablish starting-winding connections to the supply circuit.

2.7 COMPONENT – A device or fabricated part of the appliance covered by the scope of a safety standard dedicated to the purpose. When incorporated in an appliance, equipment otherwise typically field installed (e.g. luminaire) is considered to be a component. Unless otherwise specified, materials that compose a device or fabricated part, such as thermoplastic or copper, are not considered components.

2.8 COUNTER-SUPPORTED APPLIANCE – An appliance that is physically supported by a counter, table or bench during the performance of its intended function.

2.9 CORD CONNECTOR – A female contact device wired on flexible cord for use as an extension from an outlet to make a detachable electrical connection to an attachment plug or, as an appliance coupler, to an equipment inlet.

2.10 CONTROL, AUTOMATIC ACTION – A control in which at least one aspect is non-manual.

2.11 CONTROL, AUXILIARY – A device or assembly of devices that provides a functional utility, is not relied upon as an operational or protective control, and therefore is not relied upon for safety. For example, an efficiency control not relied upon to reduce the risk of electric shock, fire, or injury to persons during normal or abnormal operation of the end product is considered an auxiliary control.

2.12 CONTROL, MANUAL – A device that requires direct human interaction to activate or rest the control.

2.13 CONTROL, OPERATING – A device or assembly of devices, the operation of which starts or regulates the end product during normal operation. For example, a thermostat, the failure of which a thermal cutout/limiter or another layer of protection would reduce the risk of electric shock, fire, or injury to persons, is considered an operating control.

2.14 CONTROL, PROTECTIVE – A device or assembly of devices, the operation of which is intended to reduce the risk of electric shock, fire or injury to persons during normal and reasonably anticipated abnormal operation of the appliance. For example, a thermal cutout/limiter, or any other control/circuit relied upon for normal and abnormal conditions, is considered a protective control. (During the testing of the protective control/circuit, the protective functions are verified under normal and single-fault conditions of the control.)

2.15 CONTROL, TYPE 1 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence has not been declared and tested under this standard.

2.16 CONTROL, TYPE 2 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence have been declared and tested under this standard.

2.17 FIXED APPLIANCE – Any equipment or appliance that is provided with a facility to be fastened or otherwise secured in a specific location.

2.18 LINE-VOLTAGE CIRCUIT – A circuit involving a potential of not more than 600 V and having circuit characteristics in excess of those of a low-voltage circuit.

2.19 LOW-VOLTAGE CIRCUIT – A circuit involving a peak open-circuit potential of not more than 42.4 V supplied by a primary battery, by a Class 2 transformer, or by a combination of a transformer and a fixed impedance that as a unit, complies with all performance requirements for a Class 2 transformer. A circuit derived from a line-voltage circuit by connecting a resistance in series with the supply circuit as a means of limiting the voltage and current, is not considered to be a low voltage circuit.

2.20 PORTABLE APPLIANCE – An appliance that is easily carried or moved from one place to another in normal use.

2.21 RECESSED ULTRASONIC CLEANER – An ultrasonic cleaner that is intended to be installed with the top portion of the appliance above a countertop, and with the bottom and all sides of the enclosure located beneath the countertop. The appliance controls (such as on/off switches) and top cover (safety door) are located above the countertop.

2.22 REMOTELY CONTROLLED APPLIANCE – An appliance that is out of sight of the operator who is at the starting device.

2.23 STATIONARY APPLIANCE – An appliance that is not easily moved from one place to another in normal use or is located in a dedicated space, but is not fastened in place.

3 Units of Measurement

3.1 If a value for measurement is followed by a value in other units in parentheses, the second value may be only approximate. The first stated value is the requirement.

4 References

4.1 Any undated reference to a code or standard appearing in the requirements of this standard shall be interpreted as referring to the latest edition of that code or standard.

CONSTRUCTION

5 General

5.1 An appliance shall employ materials that are acceptable for the application.

6 Components

6.1 General

6.1.1 A component of a product covered by this standard shall:

- a) Comply with the requirements for that component as indicated in [6.2](#) – [6.26](#);
- b) Be used in accordance with its rating(s) established for the intended conditions of use;
- c) Be used within its established use limitations or conditions of acceptability;
- d) Additionally comply with the applicable requirements of this end product standard; and
- e) Not contain mercury, unless used within a fluorescent, high intensity discharge, or neon lamp bulb.

Exception No. 1: A component of a product covered by this standard is not required to comply with a specific component requirement that:

- a) Involves a feature or characteristic not required in the application of the component in the product,*
- b) Is superseded by a requirement in this end product standard, or*
- c) Is separately investigated when forming part of another component, provided the component is used within its established ratings and limitations.*

Exception No. 2: A component that complies with a UL component standard other than those specified in [6.2](#) – [6.26](#) is acceptable if the:

- a) Component also complies with the applicable component standard of [6.2](#) – [6.26](#); or*
- b) UL component standard:*
 - 1) Is compatible with the ampacity and overcurrent protection requirements in the National Electrical Code, NFPA 70, where applicable;*
 - 2) Considers long-term thermal properties of polymeric insulating materials in accordance with the Standard for Polymeric Materials – Long Term Property Evaluations, UL 746B, and*
 - 3) Any use limitations of the other component standard are identified and appropriately accommodated in the end use application. For example, a component used in a household application, but intended for industrial use and complying with the relevant component standard may assume user expertise not common in household applications.*

6.1.2 A component that is also intended to perform other functions, such as over current protection, ground-fault circuit-interruption, surge suppression, any other similar functions, or any combination thereof, shall comply additionally with the requirements of the applicable UL standard(s) that cover devices that provide those functions.

Exception: Where these other functions are not required for the application and not identified as part of markings, instructions, or packaging for the appliance, the additional UL component standard(s) need not be applied.

6.1.3 A component not anticipated by the requirements of this end product standard, not specifically covered by the component standards in [6.2](#) – [6.26](#), and that involves a risk of electric shock, fire, or

personal injury, shall be additionally investigated in accordance with the applicable UL standard, and shall comply with items (b) – (e) of [6.1.1](#).

6.1.4 With regard to [6.1.3](#), reference to construction and performance requirements in another UL end product standard is appropriate where that standard anticipates normal and abnormal use conditions consistent with the application of the requirements of this end product standard.

6.1.5 Specific components are incomplete in construction features or restricted in performance capabilities. Such components are intended for use only under limited conditions, such as certain temperatures not exceeding specified limits, and shall be used only under those specific conditions.

6.2 Attachment plugs, receptacles, connectors, and terminals

6.2.1 Attachment plugs, receptacles, appliance couplers, appliance inlets (motor attachment plugs), and appliance (flatiron) plugs, shall comply with the Standard for Attachment Plugs and Receptacles, UL 498. See [6.2.9](#).

Exception No. 1: Attachment plugs and appliance couplers integral to cord sets or power supply cords are investigated in accordance with the requirements of the Standard for Cord Sets and Power-Supply Cords, UL 817 and need not comply with the Standard for Attachment Plugs and Receptacles, UL 498.

Exception No. 2: A fabricated pin terminal assembly(ies) need not comply with the Standard for Attachment Plugs and Receptacles, UL 498 if it complies with Mechanical Assembly, Section [9](#); Accessibility, Section [11](#); Current-Carrying Parts, Section [13](#); Electrical Insulation, Section [14](#); Spacings, Section [28](#) of this end-product standard; and the applicable performance requirements when tested in the end-product.

6.2.2 Quick-connect terminals, both connectors and tabs, for use with one or two 22 – 10 AWG copper conductors, having nominal widths of 2.8, 3.2, 4.8, 5.2, and 6.3 mm (0.110, 0.125, 0.187, 0.205, and 0.250 in), intended for internal wiring connections in appliances, or for the field termination of conductors to the appliance, shall comply with the Standard for Electrical Quick-Connect Terminals, UL 310.

Exception No. 1: Other sizes of quick-connect terminals shall be investigated with respect to crimp pull out, insertion-withdrawal, temperature rise, and all tests shall be conducted in accordance with the Standard for Electrical Quick-Connect Terminals, UL 310.

Exception No. 2: A connector that complies with the Standard for Electrical Quick-Connect Terminals, UL 310 may be used with an appropriately sized tab that complies with Section [16](#). The connector is the part of a quick-connect terminal that is pushed onto the male tab, and the tab is the part that receives the female connector.

6.2.3 Single and multipole connectors for use in data, signal, control and power applications within and between electrical equipment, and that are intended for factory assembly to copper or copper alloy conductors, or for factory assembly to printed wiring boards, shall comply with the Standard for Component Connectors for Data, Signal, Control and Power Applications, UL 1977. See [6.2.9](#).

6.2.4 Wire connectors shall comply with the Standard for Wire Connectors, UL 486A-486B.

6.2.5 Splicing wire connectors shall comply with the Standard for Splicing Wire Connectors, UL 486C.

6.2.6 Multi-pole splicing wire connectors that are intended to facilitate the connection of hard-wired utilization equipment to the branch-circuit conductors of buildings shall comply with the Standard for Insulated Multi-Pole Splicing Wire Connectors, UL 2459. See [6.2.9](#).

6.2.7 Equipment wiring terminals for use with all alloys of copper, aluminum, or copper-clad aluminum conductors, shall comply with Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors, UL 486E.

6.2.8 Terminal blocks shall comply with the Standard for Terminal Blocks, UL 1059, and, if applicable, be suitably rated for field wiring.

Exception: A fabricated part performing the function of a terminal block need not comply with the Standard for Terminal Blocks, UL 1059 if the part complies with the requirements of Wiring Terminals and Leads, [12.3.3](#); Current-Carrying Parts, Section [13](#); Electrical Insulation, Section [14](#); and Spacings, Section [28](#) of this end-product standard; and the applicable performance requirements when tested in the end-product. This exception does not apply to protective conductor terminal blocks.

6.2.9 Female devices (such as receptacles, appliance couplers, and connectors) that are intended, or that may be used, to interrupt current in the end product, shall be suitably rated for current interruption of the specific type of load, when evaluated with its mating plug or connector. For example, an appliance coupler that can be used to interrupt the current of a motor load shall have a suitable horsepower rating when tested with its mating plug.

6.3 Batteries and battery chargers

6.3.1 A lithium ion (Li-On) single cell battery shall comply with the requirements for secondary lithium cells in the Standard for Lithium Batteries, UL 1642.

6.3.2 Rechargeable nickel cadmium (Ni-Cad) cells and battery packs shall comply with the applicable construction and performance requirements of this end product standard.

6.3.3 Rechargeable nickel metal-hydride (Ni-MH) battery cells and packs shall comply with the applicable construction and performance requirements of this end product standard, or the applicable requirements for secondary cells or battery packs in the Standard for Household and Commercial Batteries, UL 2054.

6.3.4 Primary batteries (non-rechargeable) that comply with the relevant UL standard and [6.1.3](#) are considered to fulfill the requirements of this Standard.

6.3.5 A Class 2 battery charger shall comply with one of the following:

- a) The Standard for Class 2 Power Units, UL 1310; or
- b) The Standard for Information Technology Equipment – Safety – Part 1: General Requirements, UL 60950-1 with an output marked "Class 2", or that complies with the limited power source (LPS) requirements and is marked "LPS".

6.3.6 A non-Class 2 battery charger shall comply with one of the following:

- a) The Standard for Power Units Other Than Class 2, UL 1012; or
- b) The Standard for Information Technology Equipment – Safety – Part 1: General Requirements, UL 60950-1.

6.3.7 To reduce the risk of injury due to battery ingestion, an appliance covered by this Standard, or any accessory of the appliance, intended for use with one or more single cell batteries, shall comply with [6.3.8](#) if the batteries are:

- a) Single cell batteries of lithium technologies;

- b) Diameter of 1.25 inch (32 mm) or less; and
- c) Height that is less than its diameter.

6.3.8 An appliance provided with one or more batteries as specified in [6.3.7](#) shall comply with the Standard for Products Incorporating Button or Coin Cell Batteries of Lithium Technologies, UL 4200A or shall be intended for Industrial use only and provided with a marking to indicate "Industrial Use Only".

6.4 Boxes and raceways

6.4.1 Electrical boxes and the associated bushings and fittings, and raceways, of the types specified in Chapter 3 of the National Electrical Code, NFPA 70 and that comply with the relevant UL standard (such as the Standard for Metallic Outlet Boxes, UL 514A, the Standard for Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers, UL 514C, the Standard for Cover Plates for Flush-Mounted Wiring Devices, UL 514D, and [6.1](#) are considered to comply with the requirements of this end product standard.

6.5 Capacitors and filters

6.5.1 The component requirements for a capacitor are not specified. A capacitor complying with the Standard for Capacitors, UL 810, is considered to fulfill the requirements of [18.1](#).

6.5.2 Electromagnetic interference filters with integral enclosures that comply with one of the following standards are considered to comply with the requirements in [18.1](#):

- a) The Standard for Electromagnetic Interference Filters, UL 1283; or
- b) The Standard for Fixed Capacitors for Use in Electronic Equipment – Part 14: Sectional Specification: Fixed Capacitors for Electromagnetic Interference Suppression and Connection to the Supply Mains, UL 60384-14.

6.6 Controls

6.6.1 General

6.6.1.1 Auxiliary controls shall be evaluated using the applicable requirements of this end product standard and the requirements in Controls – End Product Test Parameters, Section [27](#), unless otherwise specified in this end product standard; see [6.6.1.4](#).

Exception: Auxiliary controls evaluated to the requirements in Supplement [SA](#).

6.6.1.2 Operating (regulating) controls shall be evaluated using the applicable component standard requirements specified in [6.6.2](#) – [6.6.7](#) and the parameters in Section [27](#), unless otherwise specified in this end product standard; see [6.6.1.4](#).

Exception: Operating controls evaluated to the requirements in Supplement [SA](#).

6.6.1.2.1 Operating controls that rely upon software for the normal operation of the end product where deviation or drift of the operating parameters of the control may result in an increased risk of electric shock, fire, or injury to persons, shall comply with:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; and Standard for Software in Programmable Components, UL 1998; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 10730-1

6.6.1.3 Protective (limiting) controls shall be evaluated using the applicable component standard requirements specified in [6.6.2](#) – [6.6.7](#), and if applicable, the parameters in Section [27](#), unless otherwise specified in this end product standard.

Exception: Protective controls evaluated to the requirements in Supplement [SA](#).

6.6.1.3.1 Solid-state protective controls that do not rely upon software as a protective component shall comply with:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, except Controls Using Software.

Exception: Solid-state protective controls evaluated to the requirements in Supplement [SA](#).

6.6.1.3.2 Solid-state protective controls that rely upon software as a protective component shall comply with:

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; and the Standard for Software in Programmable Components, UL 1998; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

Exception: Solid-state protective controls evaluated to the requirements in Supplement [SA](#).

6.6.1.4 An electronic auxiliary or operating control (e.g. a non-protective control), the failure of which would not increase the risk of electric shock, fire, or personal injury, need only be subjected to the applicable requirements of this end product standard or the requirements in Supplement [SA](#).

6.6.2 Electromechanical and electronic controls

6.6.2.1 A control, other than as specified in [6.6.3](#) – [6.6.7](#), shall comply with:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;
- c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; or
- d) The circuit requirements in Supplement [SA](#).

6.6.3 Liquid level controls

6.6.3.1 A liquid level control shall comply with:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;
- c) The Standard for Industrial Control Equipment, UL 508, the Standard for Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters, UL 60947-4-1, the Standard for Low-voltage Switchgear and Controlgear – Part 5-2: Control Circuit Devices and Switching Elements – Proximity Switches, UL 60947-5-2, and the Standard for Programmable Controllers – Part 2: Equipment Requirements and Tests, UL 61131-2;

d) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Air Flow, Water Flow and Water Level Sensing Controls, UL 60730-2-15; or

e) The circuit requirements in Supplement [SA](#).

6.6.3.2 A switch employed as part of a water level detection mechanism is to comply with one of the switch standards specified in [6.23](#).

6.6.4 Motor and speed controls

6.6.4.1 A control used to start, stop, regulate or control the speed of a motor shall comply with:

a) The Standard for Solid-State Controls for Appliances, UL 244A;

b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;

c) The Standard for Industrial Control Equipment, UL 508, the Standard for Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters, UL 60947-4-1, the Standard for Low-voltage Switchgear and Controlgear – Part 5-2: Control Circuit Devices and Switching Elements – Proximity Switches, UL 60947-5-2, and the Standard for Programmable Controllers – Part 2: Equipment Requirements and Tests, UL 61131-2;

d) The Standard for Power Conversion Equipment, UL 508C;

e) Standard for Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal and Energy, UL 61800-5-1;

f) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, or

g) The circuit requirements in Supplement [SA](#).

6.6.5 Pressure controls

6.6.5.1 A pressure control shall comply with one of the following:

a) The Standard for Solid-State Controls for Appliances, UL 244A;

b) The Standard for Industrial Control Equipment, UL 508, the Standard for Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters, UL 60947-4-1, the Standard for Low-voltage Switchgear and Controlgear – Part 5-2: Control Circuit Devices and Switching Elements – Proximity Switches, UL 60947-5-2, and the Standard for Programmable Controllers – Part 2: Equipment Requirements and Tests, UL 61131-2;

c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls – Part 2-6: Particular Requirements for Automatic Electrical Pressure Sensing Controls Including Mechanical Requirements, UL 60730-2-6, or

d) The circuit requirements in Supplement [SA](#).

6.6.6 Temperature controls

6.6.6.1 A temperature control shall comply with:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Temperature-Indicating and -Regulating Equipment, UL 873;
- c) The Standard for Industrial Control Equipment, UL 508, the Standard for Low-Voltage Switchgear and Controlgear – Part 4-1: Contactors and Motor-Starters – Electromechanical Contactors and Motor-Starters, UL 60947-4-1, the Standard for Low-voltage Switchgear and Controlgear – Part 5-2: Control Circuit Devices and Switching Elements – Proximity Switches, UL 60947-5-2, and the Standard for Programmable Controllers – Part 2: Equipment Requirements and Tests, UL 61131-2;
- d) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls – Part 2-9: Particular Requirements for Temperature Sensing Controls, UL 60730-2-9, or
- e) The circuit requirements in Supplement [SA](#).

6.6.6.2 A temperature sensing positive temperature coefficient (PTC) or a negative temperature coefficient (NTC) thermistor, that performs the same function as an operating or protective control shall comply with:

- a) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Standard for Automatic Electrical Controls – Part 2-9: Particular Requirements for Temperature Sensing Controls, UL 60730-2-9, with Annex J; or
- b) The Standard for Thermistor-Type Devices, UL 1434.

6.6.6.3 A thermal cutoff shall comply with the Standard for Thermal-Links — Requirements and Application Guide, UL 60691.

6.6.7 Timer controls

6.6.7.1 A timer control shall comply with:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use, Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7; or
- c) The circuit requirements in Supplement [SA](#).

6.7 Cords, cables, and internal wiring

6.7.1 A cord set or power supply cord shall comply with the Standard for Cord Sets and Power Supply Cords, UL 817.

6.7.2 Flexible cords and cables shall comply with the Standard for Flexible Cords and Cables, UL 62. Flexible cord and cables are considered to fulfill this requirement when preassembled in a cord set or power supply cord complying with the Standard for Cord Sets and Power Supply Cords, UL 817.

6.7.3 Internal wiring composed of insulated conductors shall comply with the Standard for Appliance Wiring Material, UL 758.

Exception No. 1: Insulated conductors need not comply with the Standard for Appliance Wiring Material, UL 758 if they comply with one of the following:

- a) *The Standard for Thermoset-Insulated Wires and Cables, UL 44;*
- b) *The Standard for Thermoplastic-Insulated Wires and Cables, UL 83;*
- c) *The Standard for Fixture Wire, UL 66; or*
- d) *The applicable UL standard(s) for other insulated conductor types specified in Chapter 3 (Wiring Methods and Materials) of the National Electrical Code, NFPA 70.*

Exception No. 2: Insulated conductors for specialty applications (e.g. data processing or communications) and located in a low-voltage circuit not involving the risk of fire or personal injury need not comply with Standard for Appliance Wiring Material, UL 758.

6.8 Cord reels

6.8.1 A cord reel shall comply with "special use cord reel" requirements of the Standard for Cord Reels, UL 355.

6.9 Film-coated wire (magnet wire)

6.9.1 The component requirements for film coated wire and Class 105 (A) insulation systems are not specified.

6.9.2 Film coated wire in intimate combination with one or more insulators, and incorporated in an insulation system rated Class 120 (E) or higher, shall comply with the magnet wire requirements in the Standard for Systems of Insulating Materials – General, UL 1446.

6.10 Gaskets and seals

6.10.1 Gaskets and seals that comply with the Standard for Gaskets and Seals, UL 157, are considered to fulfill the requirements of [10.2](#) and [50.2.2](#).

6.11 Ground-fault, arc-fault, and leakage current detectors/interrupters

6.11.1 Ground-fault circuit-interrupters (GFCI) for protection against electrical shock shall comply with the Standard for Ground-Fault Circuit-Interrupters, UL 943. The following statement, or equivalent, shall be included as a marking near the GFCI, or as an instruction in the manual: "Press the TEST button (then RESET button) every month to assure proper operation."

6.11.2 Appliance-leakage-current interrupters (ALCI) for protection against electrical shock shall comply with the Standard for Appliance-Leakage-Current Interrupters, UL 943B. An ALCI is not considered an acceptable substitute for a GFCI when a GFCI is required by the National Electrical Code, NFPA 70.

6.11.3 Equipment ground-fault protective devices shall comply with the Standard for Ground-Fault Sensing and Relaying Equipment, UL 1053, and applicable requirements of the Standard for Ground-Fault Circuit-Interrupters, UL 943.

6.11.4 Arc-fault circuit-interrupters (AFCI) shall comply with the Standard for Arc-Fault Circuit-Interrupters, UL 1699. See Section [24](#).

6.11.5 Leakage-current detector-interrupters (LCDI) and any shielded cord between the LCDI and appliance shall comply with Standard for Arc-Fault Circuit-Interrupters, UL 1699. See Section [24](#).

6.12 Heaters and heating elements

6.12.1 Electric resistance heating elements shall comply with the construction requirements of:

- a) The Standard for Electric Heating Appliances, UL 499; or
- b) The Standard for Sheathed Heating Elements, UL 1030.

Exception: Heating wire (e.g. rope heater) that complies with the Standard for Appliance Wiring Material, UL 758, and the requirements of this end product standard are considered to fulfill this requirement.

6.12.2 Thermistor-type heaters (e.g. PTC and NTC heaters) shall comply with the Standard for Thermistor-Type Devices, UL 1434.

6.13 Insulation systems

6.13.1 Materials used in a Class 105 (A) insulation system shall comply with [22.3](#).

6.13.2 Materials used in an insulation system that operates above Class 105 (A) temperatures shall comply with the Standard for Systems of Insulating Materials – General, UL 1446.

6.13.3 All insulation systems employing integral ground insulation shall comply with the requirements specified in the Standard for Systems of Insulating Materials – General, UL 1446.

6.14 Light sources and associated components

6.14.1 Lampholders and indicating lamps with integral lamp/lampholder (e.g. neon pilot lamp) shall comply with the Standard for Lampholders, UL 496.

Exception: Lampholders forming part of a luminaire that complies with the applicable UL luminaire standard are considered to comply with this requirement.

6.14.2 Lighting ballasts shall comply with:

- a) The Standard for Fluorescent-Lamp Ballasts, UL 935, or
- b) The Standard for High-Intensity Discharge Lamp Ballasts, UL 1029.

Exception No. 1: Ballasts forming part of a luminaire that complies with the applicable UL luminaire standard are considered to comply with this requirement.

Exception No. 2: Ballasts for other light sources shall comply with the applicable UL standard(s).

6.14.3 Light emitting diode (LED) light sources shall comply with the Standard for Light Emitting Diode (LED) Equipment For Use In Lighting Products, UL 8750.

Exception No. 1: LED light sources forming part of a luminaire that complies with the applicable UL luminaire standard are considered to comply with this requirement.

Exception No. 2: Individual LED light sources mounted on printed wiring boards and intended for indicating purposes need not comply with Standard for Light Emitting Diode (LED) Equipment For Use In Lighting Products, UL 8750, but shall comply with the applicable requirements of this end product standard.

6.15 Marking and labeling systems

6.15.1 A marking and labeling system shall comply with Standard for Marking and Labeling Systems, UL 969, under the specified environmental conditions.

Exception: A marking or labeling system that complies with Section [59](#) of this standard is considered to fulfill the requirement.

6.16 Motors and motor overload protection

6.16.1 General

6.16.1.1 General-purpose type motors having a NEMA frame size shall comply with the requirements specified in [6.16.2](#). This includes fractional HP motors rated up to 1 HP (typically NEMA frame sizes 42, 48, or 56), and integral HP motors rated 1 HP and greater (typically NEMA frame sizes 140 – 449T).

6.16.1.2 Motors not enclosed, or partially enclosed, by the end product enclosure shall comply with the requirements specified in [6.16.2](#).

6.16.1.3 Component type motors completely enclosed within the end product enclosure shall comply with the requirements specified in [6.16.2](#) or [6.16.3](#).

6.16.1.4 Motors located in a low voltage circuit are evaluated for the risk of fire and personal injury in accordance with the applicable requirements of this end product standard.

6.16.1.5 Low voltage component fans that comply with the Standard for Electric Fans, UL 507, are considered to fulfill the requirements of Section [22](#).

6.16.2 General-purpose type motors

6.16.2.1 A general-purpose type motor shall comply with the Standard for Rotating Electrical Machines – General Requirements, UL 1004-1.

6.16.3 Component type motors

6.16.3.1 Component type motors shall comply with either [6.16.3.2](#) or [6.16.3.3](#).

6.16.3.2 The motor shall comply with the Standard for Rotating Electrical Machines – General Requirements, UL 1004-1 except as noted in [Table 6.1](#):

Table 6.1
Superseded requirements

UL 1004-1 exempted requirement	Superseded by the requirements in this end product standard
Current and Horsepower Relation	22.3.3
Cord-Connected Motors	12.2
Factory Wiring Terminals and Leads	Section 15
Electrical Insulation	Section 14

Table 6.1 Continued on Next Page

Table 6.1 Continued

UL 1004-1 exempted requirement	Superseded by the requirements in this end product standard
Non-Metallic Functional Parts Solid-State Controls, 7.2 Non-metallic enclosure thermal aging, 9.1.4 Motor enclosure (Cast Metal Enclosures, Sheet Metal Enclosures, and Polymeric Enclosures)	Sections 7 , 14 , 22 6.6 7.14 Section 7
Grounding Ventilation Openings: only applicable where the openings are on surfaces considered to be the appliance enclosure. Accessibility of Uninsulated Live Parts, Film-Coated Wire, and Moving Parts Protection Against Corrosion	Section 19 7.15 Section 11 Section 10
Available fault current ratings for motor start and running capacitors, 26.6: not applicable for cord and plug connected appliances. Switch: not applicable to centrifugal starting switches With the exception of the Resilient Elastomer Mounting and Electrolytic Capacitor Tests requirements, the performance tests are not applicable Only the following marking requirements are applicable: manufacturer's name or identification; rated voltage; rated frequency; number of phases if greater than 1; and multi-speed motors, other than a shaded-pole or a permanent-split-capacitor motor, shall be marked with the amperes and horsepower at each speed	Section 18 Section 26 All applicable performance tests. 70.1

6.16.3.3 The motor shall comply with the applicable component requirements in this section, the following construction requirements, and the applicable performance requirements (when tested in conjunction with the end product), of this end product standard:

- a) Protection Against Corrosion, Section [10](#);
- b) Terminal Compartment, Section [12](#) ([12.3.2.3](#));
- c) Electrical Insulation, Section [14](#);
- d) Internal Wiring, Section [15](#);
- e) Capacitors, Section [18](#);
- f) Grounding, Section [19](#);
- g) Motors, Section [22](#); and
- h) Spacings, Section [28](#).

6.16.4 Motor overload protection

6.16.4.1 Thermal protection devices integral with the motor shall comply with:

- a) The Standard for Overheating Protection for Motors, UL 2111;
- b) The Standard for Thermally Protected Motors, UL 1004-3;

c) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Thermal Motor Protectors, UL 60730-2-2; in conjunction with the Standard for Thermally Protected Motors, UL 1004-3 (to evaluate the motor-protector combination), or

d) Electronic protection complying with the tests of UL 1004-3 and the circuit requirements of Supplement [SA](#).

6.16.4.2 Impedance protection shall comply with:

a) The Standard for Overheating Protection for Motors, UL 2111; or

b) The Standard for Impedance Protected Motors, UL 1004-2.

6.16.4.3 Electronic protection integral to the motor shall comply with the Standard for Electronically Protected Motors, UL 1004-7, or the requirements in Supplement [SA](#).

6.16.4.4 Except as indicated in [6.16.4.3](#), electronically protected motor circuits shall comply with one of the following. See [6.6.4](#) for basic control requirements.

a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991. When the protective electronic circuit is relying upon software as a protective component, it shall comply with the requirements in the Standard for Tests for Software in Programmable Components, UL 1998. If software is relied upon to perform a safety function, it shall be considered software Class 1; or

b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1. If software is relied upon to perform a safety function, it shall be considered software Class B; or

c) The Standard for Power Conversion Equipment, UL 508C, when no software is relied upon to perform a safety function. If software is relied upon to perform a safety function, the circuit shall additionally comply with applicable requirements in (a) or (b) of this section; or

d) The Standard for Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal and Energy, UL 61800-5-1, when no software is relied upon to perform a safety function. If software is relied upon to perform a safety function, the circuit shall additionally comply with applicable requirements in (a) or (b).

Exception: Compliance with the above standards is not required for an electronically protected motor circuit if there is no risk of fire, electric shock, or injury to persons during abnormal testing with the motor electronic circuit rendered ineffective; compliance with the applicable requirements of this end product standard is then required.

6.17 Overcurrent protection

6.17.1 Fuses shall comply with the Standard for Low-Voltage Fuses – Part 1: General Requirements, UL 248-1, and the applicable Part 2 (e.g. UL 248-5). Defined use fuses that comply with UL 248-1 and another applicable standard for the fuse are considered to comply with this requirement.

6.17.2 Fuseholders shall comply with the Standard for Fuseholders – Part 1: General Requirements, UL 4248-1, and the applicable Part 2 (e.g. UL 4248-9).

6.17.3 Circuit breakers shall comply with the Standard for Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures, UL 489.

Exception: Circuit breakers used in telecommunications circuitry that comply with the Standard for Circuit Breakers For Use in Communications Equipment, UL 489A, need not comply with the Standard for Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures, UL 489.

6.17.4 Circuit breakers having integral ground fault circuit interrupter capability for protection against electrical shock shall additionally comply with the Standard for Ground-Fault Circuit-Interrupters, UL 943.

6.17.5 Supplementary protectors shall comply with the Standard for Supplementary Protectors for Use in Electrical Equipment, UL 1077.

6.17.6 Fusing resistors shall comply with the Standard for Fusing Resistors and Temperature-Limited Resistors for Radio- and Television-Type Appliances, UL 1412.

6.18 Polymeric materials and enclosures

6.18.1 Unless otherwise specified in this end product standard, polymeric electrical insulating materials and enclosures shall comply with the applicable requirements of the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

6.18.2 Metallized or painted polymeric parts or enclosures shall comply with the applicable requirements of the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C. This requirement is not applicable to exterior surfaces of polymeric enclosure materials or parts provided that the metallized coating or paint does not offer a continuous path for an internal flame to propagate externally.

6.19 Power supplies

6.19.1 A Class 2 power supply shall comply with one of the following:

- a) The Standard for Class 2 Power Units, UL 1310; or
- b) The Standard for Information Technology Equipment – Safety – Part 1: General Requirements, UL 60950-1, with an output marked "Class 2", or that complies with the limited power source (LPS) requirements and is marked "LPS".

6.19.2 A non-Class 2 power supply shall comply with one of the following:

- a) The Standard for Power Units Other Than Class 2, UL 1012;
- b) The Standard for Information Technology Equipment –Safety – Part 1: General Requirements, UL 60950-1, or
- c) The requirements in Supplement [SA](#).

6.20 Printed wiring boards

6.20.1 Printed wiring boards, including the coatings, shall comply with the Standard for Printed-Wiring Boards, UL 796.

Exception: A printed-wiring board in a Class 2 nonsafety circuit is not required to comply with the bonding requirements in the Standard for Printed-Wiring Boards, UL 796 if the board is separated from parts of other circuits such that loosening of the bond between the foil conductor and the base material will not result in the foil conductors or components coming in contact with parts of other circuits of the control or of the end-use product.

6.20.2 A printed-wiring board containing circuitry in a line-connected circuit or a safety circuit shall comply with the direct-support requirements for insulating materials in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluation, UL 746C.

6.20.3 Unless otherwise specified, the flammability class and temperature rating shall be that specified for insulating materials in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

6.21 Semiconductors and small electronic components

6.21.1 A power switching semiconductor device that is relied upon to provide isolation to ground shall comply with the Standard of Safety for Electrically Isolated Semiconductor Devices, UL 1557. If considered necessary, the dielectric voltage withstand tests required by UL 1557 shall be conducted applying the criteria of Section [48](#).

6.21.2 An optical isolator that is relied upon to provide isolation between primary and secondary circuits or between other circuits as required by this end product standard shall comply with the Standard for Safety for Optical Isolators, UL 1577. If considered necessary, the dielectric voltage withstand tests required by UL 1577 shall be conducted applying the criteria of Section [48](#). The dielectric test voltage is to be applied between the input and output terminals of the optical isolator.

6.21.3 Except as specified in [6.21.4](#), component requirements are not specified for small electronic components on printed wiring boards, including diodes, transistors, resistors, inductors, integrated circuits, and capacitors not directly connected to the supply source.

6.21.4 Where an electronic component is determined to be a critical component during the testing of the Abnormal Operation Test, Section [54](#), one of the following standards shall be applied. See [27.4](#) for the test parameters to be used.

- a) The Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991; and as applicable, the Standard for Software in Programmable Components, UL 1998 for controls that rely upon software as a protective component; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1.

6.21.5 A critical component is a component that performs one or more safety-related functions whose failure results in a condition, such as the risk of fire, electric shock, or injury to persons, in the end product application.

6.21.6 A critical component may also be identified using a failure-mode and effect analysis (FMEA) in accordance with the Failure-Mode and Effect Analysis (FMEA) of the Standard for Tests for Safety-Related Controls Employing Solid-State Devices, UL 991.

6.21.7 Portions of a circuit comprised of a microcontroller or other programmable device that performs a back-up, limiting, or other safety function intended to reduce the risk of fire, electric shock, or injury to persons shall comply with the Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1, Annex H.

6.22 Supplemental insulation, insulating bushings, and assembly aids

6.22.1 The requirements for supplemental insulation (e.g. tape, sleeving or tubing) are not specified unless the insulation or device is required to comply with [15.2.6](#) or a performance requirement of this Standard. In such cases:

- a) Insulating tape shall comply with the Standard for Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape, UL 510;
- b) Sleeving shall comply with the Standard for Coated Electrical Sleeving, UL 1441;
- c) Tubing shall comply with the Standard for Extruded Insulating Tubing, UL 224.

6.22.2 Wire positioning devices shall comply with Electrical Insulation, Section [14](#), and Separation of Circuits, Section [17](#). A device that complies with the Standard for Positioning Devices, UL 1565, is considered to comply with this requirement.

6.22.3 Insulating bushings that comply with [6.1](#) and the Standard for Insulating Bushings, UL 635, are considered to comply with the requirements of this Standard. Tests specified in this standard (e.g. Strain Relief Test) may still need to be performed to confirm the combination of the insulating bushing and the supporting part are suitable.

6.23 Switches

6.23.1 Switches shall comply with one of the following, as applicable:

- a) *Deleted*
- b) The Standard for Switches for Appliances – Part 1: General Requirements, UL 61058-1;
- c) The Standard for General Use Snap Switches, UL 20;
- d) The Standard for Nonindustrial Photoelectric Switches for Lighting Control, UL 733A; or
- e) The circuit requirements in Supplement [SA](#).

Exception: Switching devices that comply with the applicable UL standard for specialty applications (e.g. transfer switch equipment), industrial use (e.g. contactors, relays, auxiliary devices), or are integral to another component (e.g. switched lampholder) need not comply.

6.23.2 A clock-operated switch, in which the switching contacts are actuated by a clock-work, by a gear-train, by electrically-wound spring motors, by electric clock-type motors, or by equivalent arrangements shall comply with one of the following:

- a) The Standard for Clock-Operated Switches, UL 917; or
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7.

6.23.3 A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, shall comply with the requirements for an operating control with Type 1 action for 6,000 cycles of operation, or as a manual control for 5,000 cycles of operation, in accordance with the following:

- a) The Standard for Solid-State Controls for Appliances, UL 244A;
- b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches, UL 60730-2-7; or
- c) The circuit requirements in Supplement [SA](#).

6.23.4 A timer or time switch, incorporating electronic timing circuits or switching circuits, with or without separable contacts, that functions as a protective control, shall comply with the requirements for a protective control; see [6.6.1.3](#).

6.24 Transformers

6.24.1 General-purpose transformers shall comply with the Standard for Low Voltage Transformers: General Requirements, UL 5085-1; and the Standard for Low Voltage Transformers: General Purpose Transformers, UL 5085-2.

Exception No. 1: A transformer that is completely enclosed within the end product enclosure, and that meets the applicable construction and performance requirements of this end product standard when tested in conjunction with the end product, meets the intent of this requirement. See Section [62](#).

Exception No. 2: A transformer that complies with the Standard for Transformers and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances, UL 1411, and that is used in a circuit involving an audio or video component, meets the intent of this requirement.

6.24.2 Class 2 and Class 3 transformers shall comply with the Standard for Low Voltage Transformers: General Requirements, UL 5085-1; and the Standard for Low Voltage Transformers: Class 2 and Class 3 Transformers, UL 5085-3.

Exception: Transformers located in a low voltage circuit that do not involve a risk of fire or personal injury need not comply with this requirement.

6.25 Valves (electrically operated) and solenoids

6.25.1 Electrically operated valves shall comply with:

a) The Standard for Electrically Operated Valves, UL 429

b) The Standard for Automatic Electrical Controls – Part 1: General Requirements, UL 60730-1; and the Standard for Automatic Electrical Controls for Household and Similar Use, Part 2: Particular Requirements for Electrically Operated Water Valves, Including Mechanical Requirements, UL 60730-2-8.

Exception: Automatic valves intended for use with natural gas, manufactured gas, LP-gas or LP-gas-air mixtures shall comply with the Standard for Automatic Valves for Gas Appliances, ANSI Z21.21a/CSA 6.5a.

6.25.2 Solenoids shall comply with the applicable construction and performance requirements of this end-product standard, or with the Outline of Investigation for Solenoids, UL 906.

6.26 Video and audio components

6.26.1 A video component (e.g. a television or video) or an audio component (such as a CD player, radio, MP3 player, or audio sound system) provided with a motor-operated appliance shall comply with the following:

a) The Standard for Audio, Video, and Similar Electronic Apparatus-Safety Requirements, UL 60065; or

b) The Standard for Information Technology Equipment – Safety – Part 1: General Requirements, UL 60950-1.

6.26.2 The location, orientation, and intended use of a video or audio component shall be evaluated with the motor-operated appliance to ensure that the component(s) does not increase the risk of shock, fire, or personal injury. Examples include, but are not limited to, the mechanical mounting of the component, and the effect of the audio and video component on the overall leakage current of the appliance.

7 Frame and Enclosure

7.1 An appliance shall be formed and assembled so that it will have the strength and rigidity necessary to resist the abuses to which it is likely to be subjected, without increasing the risk of fire, electric shock or injury to persons due to total or partial collapse with resulting reduction of spacings, loosening or displacement of parts, or other serious defects.

7.2 For unreinforced, flat surfaces in general, cast metal shall not be less than 1/8 in (3.2 mm) thick, except that malleable iron may be not less than 3/32 in (2.4 mm) and die cast metal may be not less than 5/64 in (2.0 mm) thick. Corresponding thicknesses of not less than 3/32, 1/16 (1.6 mm), and 3/64 in (1.2 mm), respectively, may be acceptable if the surface under consideration is curved, ribbed, or otherwise reinforced, or if the shape or size, or both, of the surface is such that the necessary mechanical strength is provided.

7.3 An enclosure of sheet metal shall be judged with respect to its size, shape, thickness of metal, and its application, considering the intended use of the complete appliance. The use of sheet steel having a thickness of less than 0.026 in (0.66 mm) if uncoated or 0.029 in (0.74 mm) if galvanized or of nonferrous sheet metal having a thickness of less than 0.036 in (0.91 mm) is not recommended, except for relatively small areas or for surfaces that are curved or otherwise reinforced.

7.4 Sheet metal to which a wiring system is to be connected in the field shall have a thickness not less than 0.032 in (0.81 mm) if uncoated steel, not less than 0.034 in (0.86 mm) if galvanized steel, and not less than 0.045 in (1.14 mm) if nonferrous.

7.5 Among the factors that shall be taken into consideration when judging a nonmetallic enclosure or an enclosure of magnesium are resistance to:

- a) Mechanical damage,
- b) Impact,
- c) Moisture-absorption,
- d) Combustion, and
- e) Distortion at temperatures to which the material may be subjected under conditions of normal or abnormal use.

7.6 The enclosure of a remotely or automatically controlled appliance shall reduce the risk of molten metal, burning insulation, flaming particles, or the like from falling on combustible materials, including the surface upon which the appliance is supported.

7.7 The requirement in [7.6](#) will necessitate that a switch, a relay, a solenoid, or the like be individually and completely enclosed, except for terminals, unless it can be shown that malfunction of the component would not result in a risk of fire, or there are no openings in the bottom of the appliance enclosure. It will also necessitate the use of a barrier of noncombustible material:

- a) Under a motor unless:
 - 1) The structural parts of the motor or of the appliance provide the equivalent of such a barrier;

2) The protection provided with the motor is such that no burning insulation or molten material falls to the surface that supports the appliance when the motor is energized under each of the following fault conditions:

- i) Open main winding;
- ii) Open starting winding;
- iii) Starting switch short-circuited; and
- iv) Capacitor of permanent-split capacitor motor short-circuited – the short circuit is to be applied before the motor is energized, and the rotor is to be locked;


3) The motor is provided with a thermal motor protector – a protective device that is sensitive to temperature and current – that will reduce the risk of the temperature of the motor windings from exceeding 125°C (257°F) under the maximum load under which the motor will run without causing the protector to cycle and from exceeding 150°C (302°F) with the rotor of the motor locked; or

4) The motor complies with the requirements in the Standard for Overheating Protection for Motors, UL 2111, and the temperature of the motor winding will not exceed 150°C during the first 72 h of operation with the rotor of the motor locked.

b) Under wiring, unless it is neoprene, cross-linked polyethylene, or thermoplastic insulated.

7.8 The barrier mentioned in [7.7](#) shall be horizontal, shall be located as illustrated in [Figure 7.1](#), and shall not have an area less than that described in that illustration. Openings for drainage, ventilation, and the like may be employed in the barrier, provided such openings would not permit molten metal, burning insulation, or the like to fall on combustible material.

Figure 7.1
Location and extent of barrier

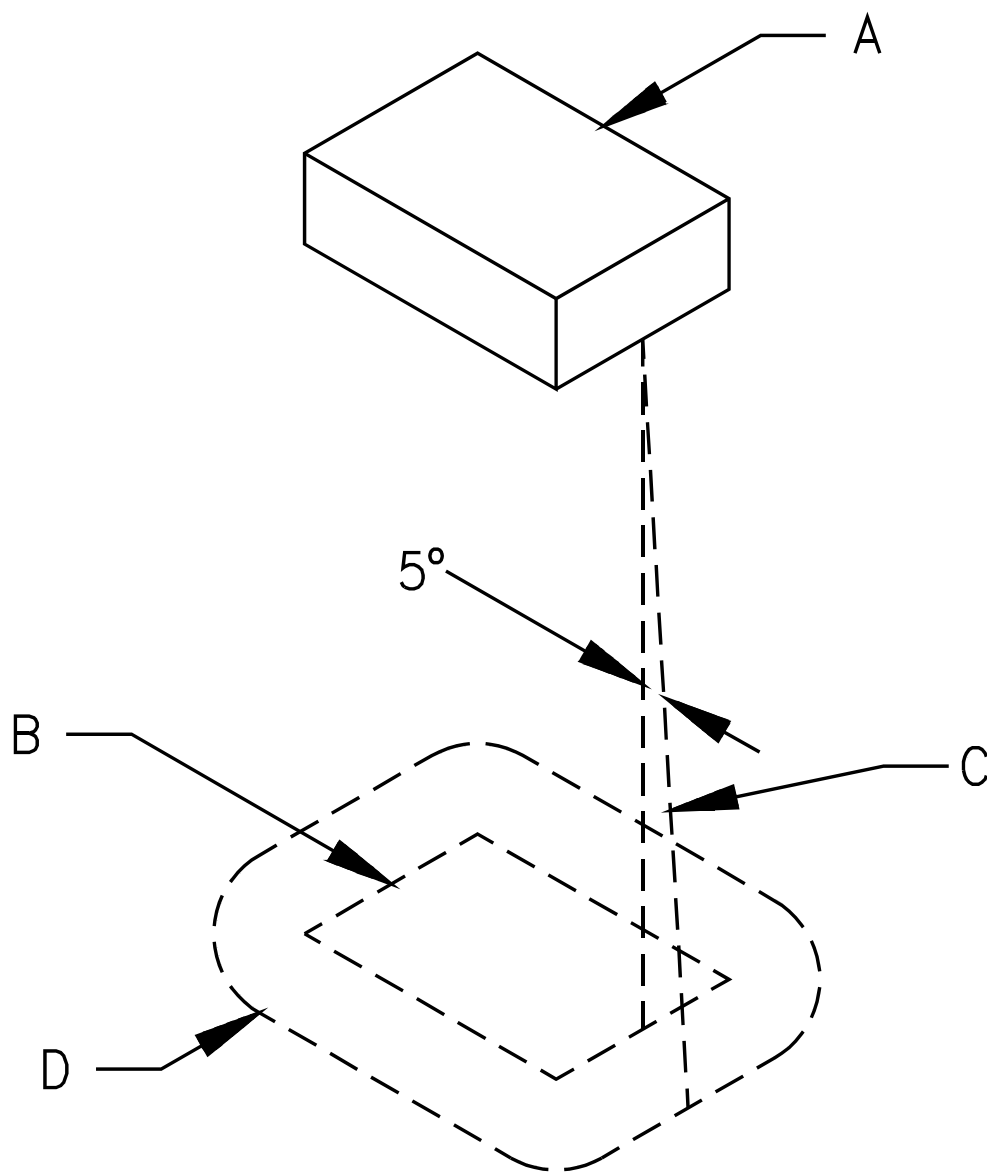

SA0604-1

NOTES –

A – Region to be shielded by barrier. This will consist of the entire component if it is not otherwise shielded and will consist of the unshielded portion of a component that is partially shielded by the component enclosure or equivalent.

B – Projection of outline of component on horizontal plane.

C – Inclined line that traces out minimum area of barrier. The line is always (1) tangent to the component, (2) 5° from the vertical, and (3) oriented so that the area traced out on a horizontal plane is maximum.

D – Location (horizontal) and minimum area for barrier. The area is that included inside the line of intersection traced out by the inclined line C and the horizontal plane of the barrier.

7.9 A door or a cover of an enclosure that provides access to any overload protective device that requires resetting or renewal shall be hinged or otherwise attached in an equivalent manner.

7.10 Means shall be provided for holding the door or cover over a fuseholder in a closed position, and the door or cover shall be tight-fitting.

7.11 A cord-connected appliance that is provided with keyhole slots, notches, hanger holes, or the like, for hanging on a wall shall be constructed in such a manner that the hanging means is not accessible without removing the appliance from the supporting means.

7.12 To determine whether a product complies with the requirement in [7.11](#), any part of the enclosure or barrier that can be removed without the use of tools to gain access to the hanging means is to be removed.

7.13 An opening in the appliance provided for hanging shall be located or guarded so that a nail, hook, or the like does not displace a part that would create a risk of fire or electric shock, and does not contact one of the following:

- a) An uninsulated live part.
- b) Magnet wire.
- c) Internal wiring.
- d) Moving parts.
- e) Any other part likely to create a risk of fire or electric shock.

7.14 An enclosure of polymeric material shall comply with the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C. The polymeric enclosure material of an appliance for outdoor-use shall be subjected to the Ultraviolet Light Exposure Test and the Cold Impact Test.

Exception: For an outdoor use appliance marked in accordance with [70.8.2](#), the Ultraviolet Light Exposure Test is not applicable and the conditioning for the Cold Impact Test is conducted at $0 \pm 2^\circ\text{C}$.

7.15 The polymeric housing of a component is not considered to be an appliance enclosure unless this part is the sole insulation (excluding air) between a live part and an external surface of the appliance.

7.16 An appliance intended for outdoor use shall comply with Water Spray Test, Section [50.1](#).

Exception: This requirement is not applicable if the appliance is marked in accordance with [70.8.2](#).

7.17 Polymeric enclosure and insulating materials, internal wiring, and other polymeric component parts shall be acceptably resistant to degradation when exposed to ultraviolet light, if degradation of the part would result in non-compliance with other requirements of this Standard. To determine whether a part is acceptably resistant to ultraviolet light, the part shall be subjected to the Ultraviolet Light Exposure Test specified in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

8 Adhesives Used to Secure Parts

8.1 An adhesive that is relied upon to reduce a risk of fire, electric shock, or injury to persons shall comply with the requirements for adhesives in the Standard for Polymeric Materials – Use in Electrical Equipment Evaluations, UL 746C.

8.2 The requirement in [8.1](#) also applies to an adhesive used to secure a conductive part, including a nameplate, that may, if loosened or dislodged:

- a) Energize an accessible dead metal part,
- b) Make a live part accessible,
- c) Reduce spacings below the minimum acceptable values, or
- d) Short-circuit live parts.

8.3 Whether the conditions mentioned in [8.2](#)(a) – (d) can occur is to be considered with respect to both:

- a) A part inside the device, and
- b) A part on the outside of the device that may affect equipment in which the device is to be installed.

9 Mechanical Assembly

9.1 An appliance shall be assembled so that it will not be adversely affected by the vibration of normal operation. Brush caps shall be tightly threaded or otherwise constructed to reduce the risk of loosening.

9.2 A switch other than a through-cord switch, a lampholder, an attachment-plug receptacle, a motor-attachment plug, or similar component shall be securely mounted and shall be prevented from turning. See [9.4](#).

Exception No. 1: A switch need not be prevented from turning provided:

- a) The switch is of a plunger or other type that does not tend to rotate when operated. A toggle switch is considered to be subject to forces that tend to turn the switch during normal operation of the switch;*
- b) The means for mounting the switch makes it unlikely that operation of the switch will loosen it;*
- c) The spacings are not reduced below the minimum required values if the switch rotates; and*
- d) The normal operation of the switch is by mechanical means rather than by direct contact by persons.*

Exception No. 2: A lampholder of the type in which the lamp cannot be replaced, such as a neon pilot or indicator light in which the lamp is sealed in a nonremovable jewel, need not be prevented from turning if rotation cannot reduce spacings below the minimum required values.

9.3 Uninsulated live parts shall be secured to the base or mounting surface so that they will be prevented from turning or shifting in position, if such motion may result in a reduction of spacings below the minimum acceptable values.

9.4 The means for preventing the turning or shifting mentioned in [9.2](#) and [9.3](#) is to consist of more than friction between surfaces – for example, a properly applied lock washer is acceptable as the means for preventing a small stem-mounted switch or other device having a single-hole mounting means from turning.

10 Protection Against Corrosion

10.1 Iron and steel parts shall be protected against corrosion by enameling, galvanizing, plating, or other equivalent means, if corrosion of such unprotected parts would be likely to result in a risk of fire, electric shock, or injury to persons.

Exception No. 1: Surfaces of sheet-steel and cast-iron parts within an enclosure may not be required to be protected against corrosion if the oxidation of the metal due to the exposure to air and moisture is not likely to be appreciable. The thickness of metal and temperature are also to be considered.

Exception No. 2: This requirement does not apply to bearings, laminations, or minor parts of iron or steel, such as washers, screws, and the like.

10.2 If deterioration of a liquid container provided as a part of an appliance would result in a risk of fire or electric shock, the container shall be of a material that is resistant to corrosion by the liquid intended to be used therein.

11 Accessibility of Uninsulated Live Parts and Film-Coated Wire

11.1 To reduce the likelihood of unintentional contact that may involve a risk of electric shock from an uninsulated live part or film-coated wire, an opening in an enclosure shall comply with either item (a) or (b).

a) For an opening that has a minor dimension (see [11.5](#)) less than 1 in (25.4 mm), such a part or wire shall not be contacted by the probe illustrated in [Figure 11.1](#).

b) For an opening that has a minor dimension of 1 in or more, such a part or wire shall be spaced from the opening as specified in [Table 11.1](#).

Exception: A motor other than one used in either a hand-held appliance or a hand-supported portion of an appliance need not comply with these requirements if it complies with the requirements in [11.2](#).

Figure 11.1
Articulate probe with web stop

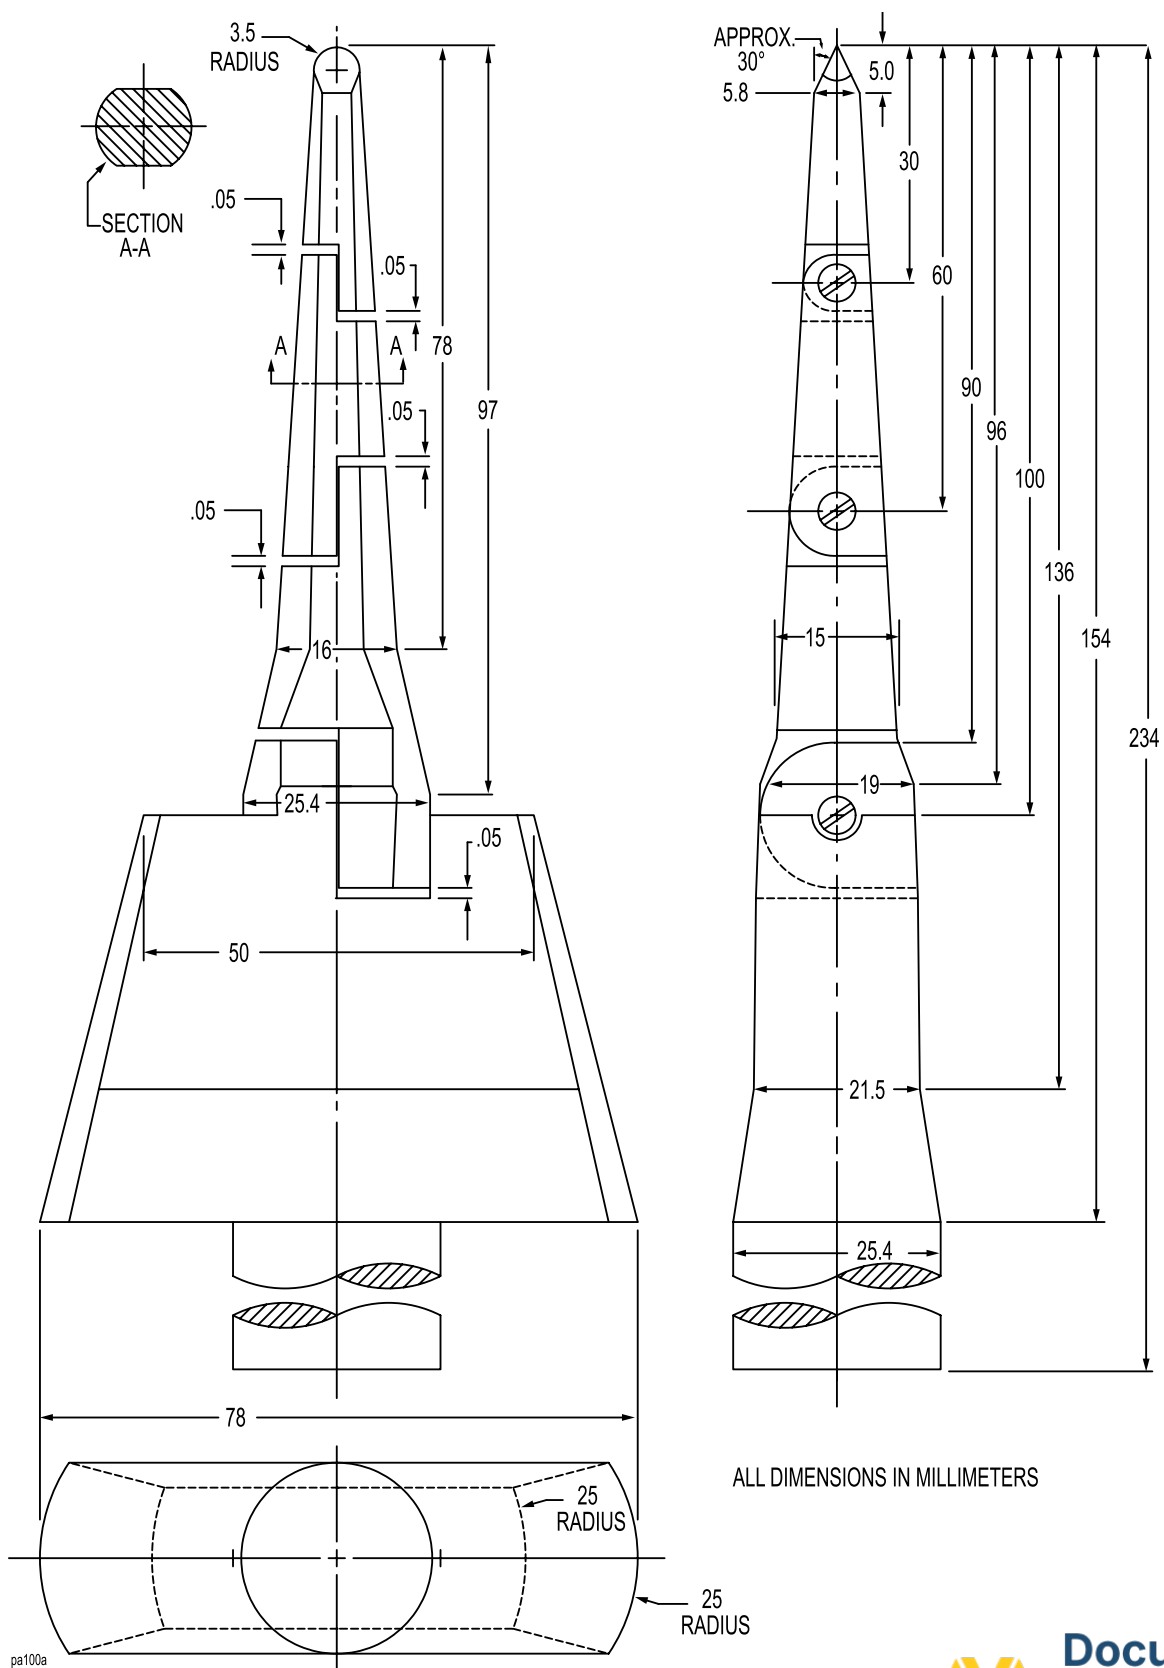


Table 11.1
Minimum acceptable distance from an opening to a part that may involve a risk of electric shock

Minimum dimension ^a of opening, in (mm) ^b		Minimum distance from opening to part, in (mm) ^b	
3/4 ^c	(19.1)	4-1/2	(114)
1 ^c	(25.4)	6-1/2	(165)
1-1/4	(31.8)	7-1/2	(190)
1-1/2	(38.1)	12-1/2	(318)
1-7/8	(47.6)	15-1/2	(394)
2-1/8	(54.0)	17-1/2	(444)
d		30	(762)
^a See 11.5 . ^b Between 3/4 and 2-1/8 in, interpolation is to be used to determine a value between values specified in the table. ^c Any dimension less than 1 in applies to a motor only. ^d More than 2-1/8 in, but not more than 6 in (152 mm).			

11.2 With respect to a part or wire as mentioned in [11.1](#), in an integral enclosure of a motor as mentioned in the Exception to [11.1](#):

a) An opening that has a minor dimension (see [11.5](#)) less than 3/4 in (19.1 mm) is acceptable if:

- 1) Film-coated wire cannot be contacted by the probe illustrated in [Figure 11.3](#);
- 2) In a directly accessible motor (see [11.6](#)), an uninsulated live part cannot be contacted by the probe illustrated in [Figure 11.4](#); and
- 3) In an indirectly accessible motor (see [11.6](#)), an uninsulated live part cannot be contacted by the probe illustrated in [Figure 11.2](#).

b) An opening that has a minor dimension of 3/4 in or more is acceptable if a part or wire is spaced from the opening as specified in [Table 11.1](#).

Figure 11.2
Straight probe

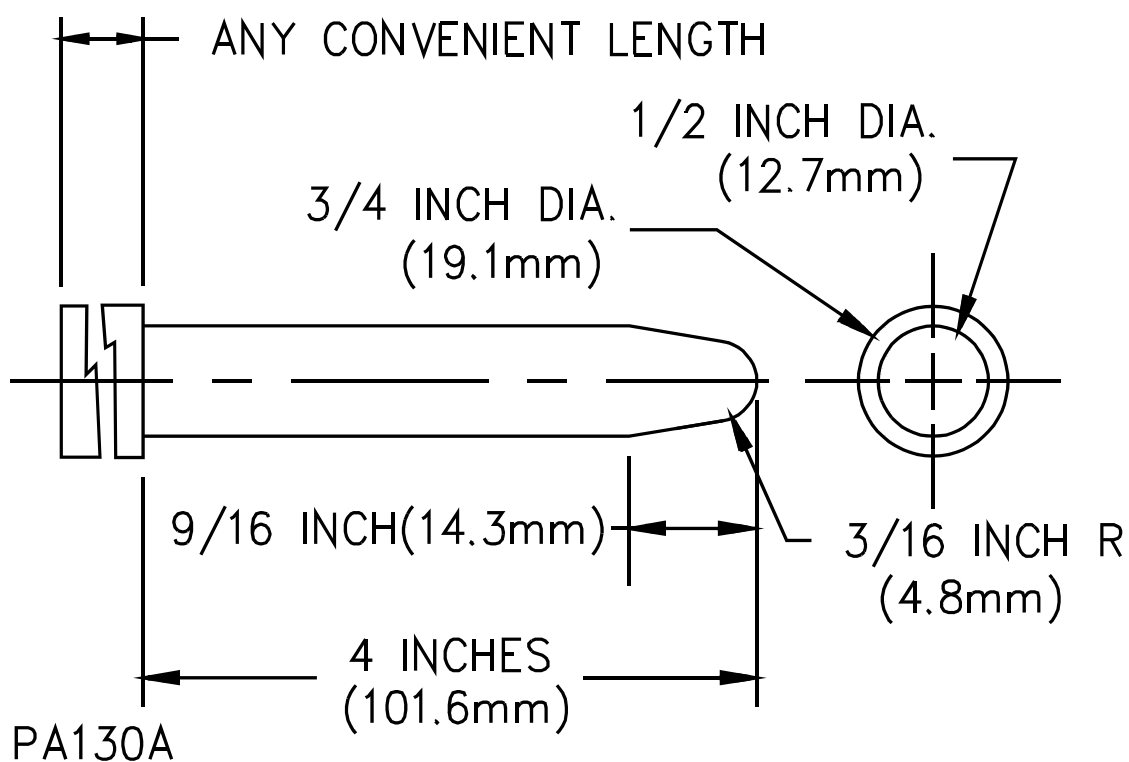


Figure 11.3
Straight probe


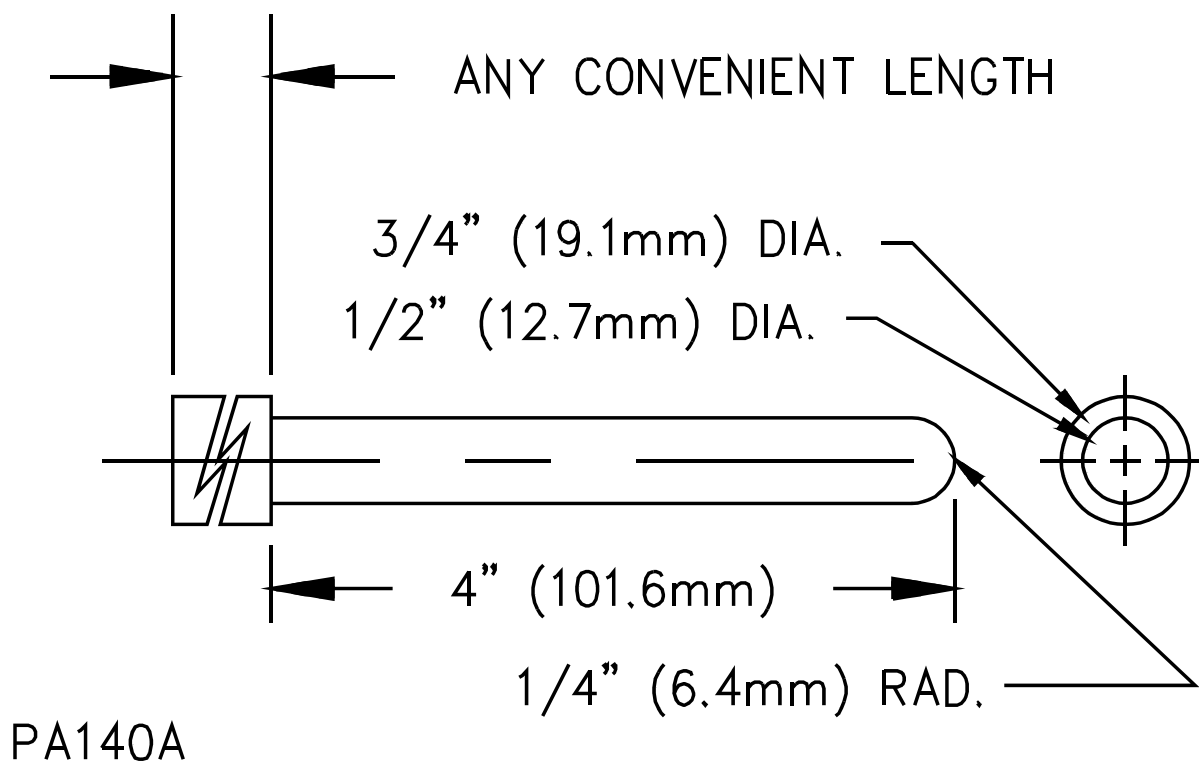


Figure 11.4
International Electrotechnical Commission (IEC)
Articulate accessibility probe with stop plate
All dimensions in millimeters
Courtesy of IEC

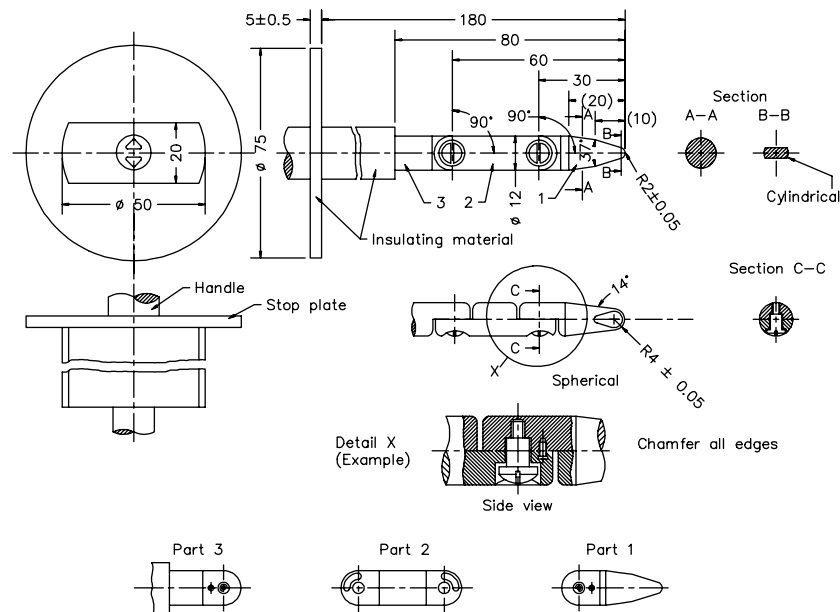

11.3 The probes mentioned in [11.1](#) and [11.2](#) and illustrated in [Figure 11.1](#) – [Figure 11.4](#) shall be applied to any depth that the opening will permit, and shall be rotated or angled before, during, and after insertion through the opening to any position that is necessary to examine the enclosure. The probe illustrated in [Figure 11.1](#) and [Figure 11.4](#) shall be applied in any possible configuration; and, if necessary, the configuration shall be changed after insertion through the opening.

11.4 The probes mentioned in [11.3](#) and [11.5](#) shall be used as measuring instruments to judge the accessibility provided by an opening, and not as instruments to judge the strength of a material; they shall be applied with the minimum force necessary to determine accessibility.

11.5 With reference to the requirements in [11.1](#) and [11.2](#), the minor dimension of an opening is the diameter of the largest cylindrical probe having a hemispherical tip that can be inserted through the opening.

11.6 With reference to the requirements in [11.2](#), an indirectly accessible motor is a motor that is accessible only by opening or removing a part of the outer enclosure, such as a guard or panel, than can be opened or removed without using a tool, or that is located at such a height or is otherwise guarded or enclosed so that it is unlikely to be contacted. A directly accessible motor is a motor that can be contacted without opening or removing any part or that is located so as to be accessible to contact.

11.7 During the examination of an appliance to determine whether it complies with the requirements in [11.1](#) or [11.2](#), a part of the enclosure that may be opened or removed by the user without a tool (to attach an accessory, to make an operating adjustment, or for other reasons) is to be opened or removed.

11.8 With reference to the requirements in [11.1](#) and [11.2](#), insulated brush caps are not required to be additionally enclosed.

12 Supply Connections

12.1 General

12.1.1 An ultrasonic cleaner provided with a mechanical connection (such as a threaded or soldered plumbing connection) that does not permit the ready removal of the appliance for maintenance or repair, shall not be provided with a flexible cord for connection to the electrical supply.

12.1.2 The appliance described in [12.1.1](#) shall have provision for permanent electrical connection. See [12.3.2](#) and [12.3.3](#).

12.2 Cord-connected appliances

12.2.1 Carbonators

12.2.1.1 A carbonator that is connected to the electrical supply by a flexible cord shall comply with the following:

- a) All waterline connections shall be by means of flexible hose or equivalent;
- b) The flexible cord shall be of Type SJT or of a Type equally serviceable, shall not be longer than 10 ft (3.05 m), and shall have a grounding conductor and a grounding type attachment plug; and
- c) In addition to complying with the other applicable requirements in the standard, the wiring compartment shall be constructed and the cord attached so a permanent connection is able to be made to the power supply. The construction shall comply with the following conditions:
 - 1) The cord shall enter the wiring compartment through a 7/8-in (22.2-mm) diameter hole that, after the cord and any bushing or fitting provided have been removed, provides an opening for attachment of a wiring system that is intended for the appliance; and
 - 2) The power-supply cord is connected to the internal wiring by a device such as a terminal block, pressure cable connector, or a similar device, that accommodates permanent wiring having an ampacity rated for the appliance, and that complies with [12.3.2](#) – [12.3.4](#).

12.2.1.2 With reference to [12.2.2.7](#), a countertop or tabletop carbonator intended for household use, indoor use only, may be provided with a cord length not less than 2 ft (0.6 m).


12.2.2 Cords and plugs

12.2.2.1 An appliance intended to be connected to the power-supply circuit by means of a flexible cord shall be provided with a flexible cord and an attachment plug for connection to the supply circuit.


12.2.2.2 The attachment plug of an appliance intended to be connected to a nominal 120 V circuit, and employing devices required to be connected to a specific supply conductor as specified in [21.2](#), [25.2](#), and [26.3](#) shall be a polarized type. The connections to the attachment plug shall be in accordance with [Figure 12.1](#). The polarity identification of the supply cord shall be in accordance with [Table 12.1](#). See [73.4](#).

Figure 12.1**Connections to attachment plugs**

CONNECTIONS OF CORD CONDUCTORS TO GROUNDING – TYPE ATTACHMENT PLUG (FACE OF PLUG REPRESENTED)

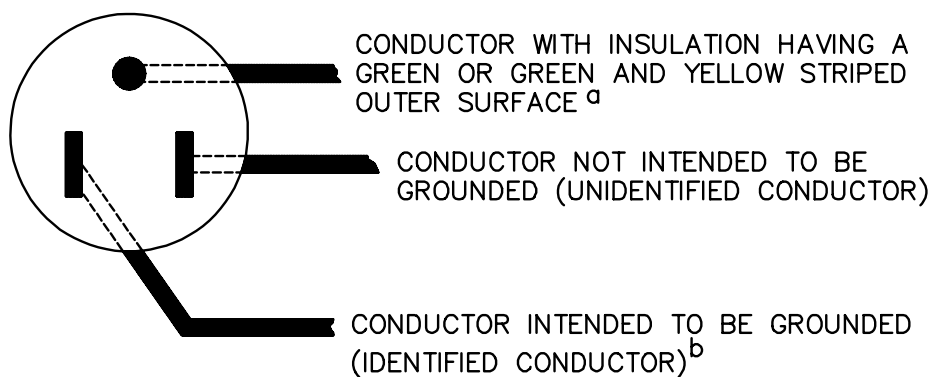

CONNECTIONS OF CORD CONDUCTORS TO POLARIZED ATTACHMENT PLUG (FACE OF PLUG REPRESENTED)

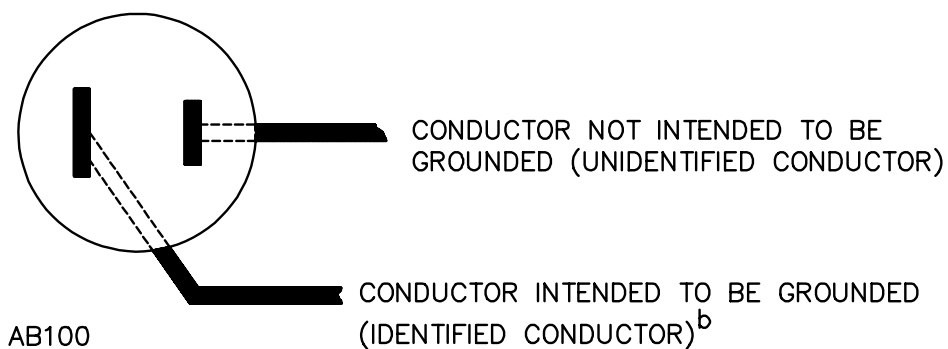**NOTES –**

^a In the above illustration, the blade to which the green conductor is connected may have a U-shape instead of a circular cross section.

^b Signifies a conductor identified in accordance with [Table 12.1](#).

Table 12.1
Polarity identification of flexible cords

Method of identification	Acceptable combinations	
	Conductor intended to be grounded ^{a, b}	All other conductors ^a
Color of braids on individual conductors	Solid white or gray – without tracer Color other than white or gray – with tracer in braid	Solid color other than white or gray – without tracer Solid color other than white or gray – without tracer
Color of insulation on individual conductors	Solid white or gray ^c Solid light blue ^d	Solid color other than white or gray Solid color other than light blue, white or gray
Color of separators	Solid white or gray ^e	Solid color other than white, or gray
Other means	Tin or other white metallic coating on all strands of the conductor ^e A stripe, ridge, or groove on the exterior surface of the cord ^e	No tin or other white metallic coating on the strands of the conductor
^a A conductor finished to show a green color with or without one or more yellow stripes or tracers is to be used only as an equipment-grounding conductor. See 19.2.1 and Figure 12.1 . ^b The grounded (identified) conductor is the neutral supply conductor. ^c Only for cords – other than Types SP-2, SPE-2, and SPT-2 – having no braid on any individual conductor. ^d For jacketed cords. ^e Only for cords having insulation on the individual conductors integral with the jacket, such as Types SP-2, SPE-2, and SPT-2 cords.		

12.2.2.3 An appliance that is required to employ a polarized attachment plug as specified in [12.2.2.2](#), and that is provided with a separate or detachable cord set as specified in Exception No. 1 of [12.2.2.7](#) and [12.2.2.9](#) shall also employ an appliance connector of the polarized type.

12.2.2.4 The flexible cord shall have a voltage rating not less than the rated voltage of the appliance, and shall have an ampacity that is not less than the current rating of the appliance.

12.2.2.5 Type SJ, SJE, SJO, SJOO, SJT, SJTO, or SJTOO cord is required when a portable appliance is intended for commercial or industrial use, and Type SP-2, SPE-2, or SPT-2 when a portable appliance is intended for household use. A cord type at least as serviceable may be used.

Exception No. 1: Portable, commercial, indoor use jewelry and ultrasonic cleaners may employ minimum 18 AWG (0.82 mm²), Type SPT-2 supply cord if:

- a) The appliance is counter-supported;*
- b) The cord cannot contact motorized moving parts and is not subject to motion under normal use; and*
- c) The cord is unlikely to be subjected to mechanical abuse.*

Exception No. 2: Commercial indoor use insect control equipment may employ minimum 18 AWG, Type SPT-2 or HPN supply cord if:

- a) The appliance is intended for commercial cooking establishments;*
- b) The appliance is for wall mounting but not for permanent attachment to the building structure (e.g. key slots are used to mount the equipment);*
- c) The weight of the appliance is not more than 15 pounds (6.8 kg);*

- d) *The cord is not exposed to oil;*
- e) *The cord cannot contact motorized moving parts and is not subject to motion under normal use; and*
- f) *The cord is unlikely to be subjected to mechanical abuse.*

12.2.2.6 A stationary appliance (see [2.23](#)) may be provided with 6 ft (1.83 m) to 8 ft (2.44 m) of Type S, SE, SO, SOO, ST, STO, or STOO cord and an attachment plug for supply connection. A cord type at least as serviceable may be used.

Exception No. 1: A stationary appliance employing isolated ground type receptacles shall not be cord connected.

Exception No. 2: For a checkout stand connected to the electrical supply by a flexible cord, the wiring compartment shall be constructed and the cord attached such that the cord can be easily removed to allow the checkout stand to be connected to a permanent wiring system in accordance with [12.3](#). See also [73.10](#).

12.2.2.7 The flexible cord shall not be less than 6 ft (1.83 m) long and shall be attached to the appliance.

Exception No. 1: An appliance that is not required to be provided with a grounding conductor may be provided with a separate cord set having means for connection to the appliance and a length of not less than 6 ft.

Exception No. 2: A cord-connected appliance that is required to be equipped with a grounding conductor may be provided with not more than 18 in (457 mm) of permanently attached flexible cord or with a connector base if:

- a) *For an outdoor use appliance, the appliance is marked in accordance with [70.3.5](#) and is provided with installation instructions in accordance with [73.9](#).*
- b) *For other than an outdoor use appliance:*
 - 1) *Usage of the appliance is such that it is necessary to connect the appliance by means of an extension cord during normal operation; the manufacturer makes extension cords available; and a statement indicating the availability of such extension cords is marked on the appliance or is included in an instruction book or the like that is regularly furnished with the appliance; or*
 - 2) *The manufacturer furnishes a detachable cord set, 6 ft or more long, with the appliance.*

Exception No. 3: This requirement does not apply to a cord as described in [12.2.1.1](#) (b).

Exception No. 4: A hand-supported engraver, intended for marking or etching materials, may be provided with not less than 5 ft (1.52 m) of attached flexible cord.

12.2.2.8 The length of an attached flexible cord includes the attachment plug. The length of a cord set includes the fittings.

12.2.2.9 A household appliance intended for use with a detachable cord set shall not be provided with terminal pins that will accommodate a standard flatiron or appliance plug.

12.2.2.10 The attachment plug shall have an ampere rating not less than 125% of the rated current of an appliance, or, when the appliance is not provided with a current rating, the measured input current under