PD ISO/TS 50044:2019

BSI Standards Publication

Energy saving projects (EnSPs) — Guidelines for economic and financial evaluation

Documents
Document Sharing Hub

Full document details: PD ISO/TS 50044:2019

National foreword

This Published Document is the UK implementation of ISO/TS 50044:2019.

The UK participation in its preparation was entrusted to Technical Committee SEM/1, Energy Management.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2019
Published by BSI Standards Limited 2019

ISBN 978 0 580 89806 8

ICS 27.015

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 November 2019.

Amendments/corrigenda issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD ISO/TS 50044:2019

TECHNICAL SPECIFICATION

ISO/TS 50044

First edition
2019-11

Energy saving projects (EnSPs) — Guidelines for economic and financial evaluation

Projets d'économies d'énergie — Lignes directrices pour l'évaluation économique et financière

Reference number
ISO/TS 50044:2019(E)

Documents
Document Sharing Hub

© ISO 2019

Full document details: PD ISO/TS 50044:2019

COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2019 – All rights reserved

Documents
Document Sharing Hub

Full document details: PD ISO/TS 50044:2019

Contents

Page

Foreword ..... **v**
Introduction ..... **vi**
1 Scope **1**
2 Normative references **1**
3 Terms and definitions **1**
4 Symbols and abbreviated terms **5**
5 Planning an economic and financial evaluation of an EnSP **6**
5.1 General 6
5.2 Description of an EnSP and associated lifetime 7
5.3 Identification and definition of the boundaries 7
5.3.1 General 7
5.3.2 Examples of EnSP boundaries 7
5.4 Data collection 8
5.5 Evaluation objectives and required accuracy 9
6 Estimation and calculation of energy and non-energy effects **9**
6.1 Prediction and estimation of energy savings 9
6.2 Energy savings calculation 9
6.3 Estimation of non-energy effects 10
6.4 Conversion of EnSP effects into economic value 10
6.4.1 General 10
6.4.2 Revenues 10
6.4.3 Estimation of external costs and benefits 10
7 Identification and calculation of costs and cash flows **10**
7.1 General 10
7.2 Cost characteristics 11
7.2.1 General 11
7.2.2 Variable cost 11
7.2.3 Fixed costs 12
7.2.4 Total capital investment 12
7.3 Cash flows description 13
7.3.1 General 13
7.3.2 Accounting for future cash flows 14
7.3.3 Rates of time preference or comparison 14
7.3.4 Choosing a rate of time preference or comparison 14
8 Analysis and assessment **15**
8.1 Economic and financial indicators 15
8.1.1 General 15
8.1.2 Present value 16
8.1.3 Net present value 16
8.1.4 Internal rate of return 17
8.1.5 Payback period 17
8.1.6 Life cycle cost analysis 18
8.1.7 Profitability index 19
8.2 Assessment 20
8.2.1 General 20
8.2.2 Sensitivity analysis 20
8.2.3 Uncertainty and risk assessment 20
8.3 Analysis 22
8.3.1 Energy data quality 22
8.3.2 Social cost benefit analysis 22
8.4 Decision-making 24

© ISO 2019 – All rights reserved

AVA Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

8.4.1 General ... 24
8.4.2 Selection of an EnSP based on indicators ... 24
9 Reporting ... **25**
Annex A (informative) **Energy savings calculation steps** ... **26**
Annex B (informative) **Example of cost characteristics** ... **28**
Annex C (informative) **Examples of payback period calculation** ... **29**
Annex D (informative) **Example of net present value calculation** ... **31**
Annex E (informative) **Examples of internal rate of return calculation** ... **33**
Annex F (informative) **Example of life cycle cost analysis** ... **37**
Bibliography ... **40**

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 301, *Energy management and energy savings*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2019 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

Introduction

A complete assessment of an investment in an energy saving project (EnSP) requires analysis of all costs and benefits over the lifetime of the investment. This assessment can be used to prioritize the EnSPs. However, it is important to consider the aim and scope at the outset because this will prescribe the course to be followed. The basic criterion for evaluating an investment decision in an EnSP is that the benefits resulting from the EnSP should be greater than the costs incurred within a defined time period for the return on the investment.

This document provides guidance on a methodological framework for the calculation, evaluation and reporting of economic status by defining economic indicators to facilitate the selection of energy performance improvement actions (EPIAs), EnSPs or opportunities. It provides examples and concepts to demonstrate the financial value of the activities related to energy savings to ensure the business connection to the organization.

This document is intended to help EnSP investment evaluators to determine an appropriate approach or type of analysis at an appropriate level of detail and to assist energy savings evaluators in completing consistent analyses using documented assumptions and reasoning. This document includes analytical techniques that are commonly required for an economic evaluation of an EnSP.

Where possible, the financial evaluation of an EnSP should follow the approved method of the organization making the investment, and the detailed approach outlined in this document should be adjusted based on guidance from the organization.

The aim of an economic and financial evaluation is to provide the information needed to make a judgement or a decision in relation to EnSPs.

The perspective of analysis is important, as it often dictates the approach to be used. Also, the ultimate use of the results of an analysis will influence the level of detail required. The decision-making criteria of the potential investor should also be considered.

This analysis approach provides a significantly better evaluation of the long-term implications of an investment than methods that focus on first cost or short-term results. In this document, evaluation methods can be applied to virtually any public or private business sector investment decision as well as EnSPs decisions. Such decisions include the evaluation of alternative solutions with different initial costs, operating and maintenance costs, and the evaluation of investments to improve energy performance.

The process approach and steps used for EnSPs economic and financial evaluation, which are used throughout this document, are illustrated in Figure 1.

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

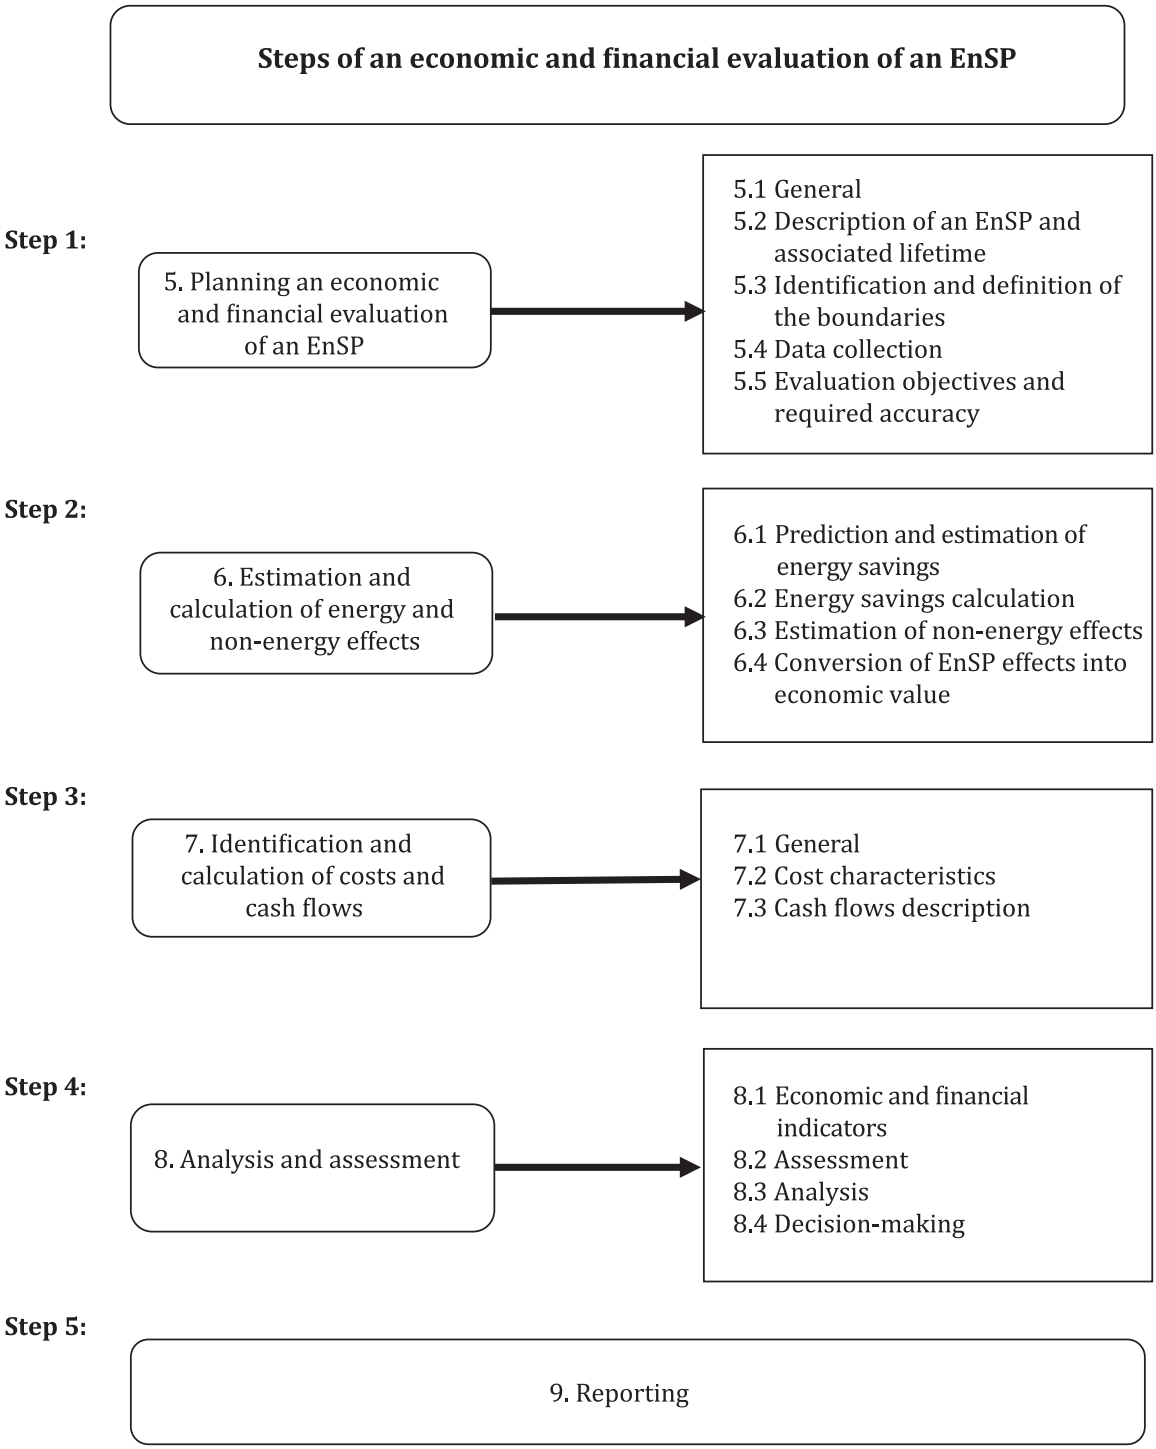

Figure 1 — Economic and financial evaluation approach

© ISO 2019 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

This document includes:

a) terms and definitions;

b) the types of costs that should be taken into account for the calculation of the economic and financial evaluation of EnSPs;

c) the data needed for the determination and calculation of costs related to the EnSP under consideration;

d) the calculation and assessment of economic and financial indicators (EFIs);

e) a general framework and rules for the economic priorities of EnSPs;

f) the principle of reporting and expression of results for the economic and financial evaluations of EnSPs.

This document provides indicators for the financial evaluation of all types of EnSPs. Those indicators include the internal rate of return (IRR), net present value (NPV), payback period (PP) and life cycle cost analysis (LCCA).

This document can be used by any organization during the important phases of an energy management system, such as energy review, design, procurement and management review, to prioritize and record energy performance opportunities accurately, consistent with ISO 50001.

This document also can be used by any stakeholder (e.g. policy makers, decision-makers, organizations, NGOs) that aims to quantify the cost of EnSPs over a specific period. Annex A provides guidance on the steps for an energy savings calculation. Annexes B to F provide an overview of the economic and financial evaluations with practical examples.

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

Energy saving projects (EnSPs) — Guidelines for economic and financial evaluation

1 Scope

This document gives guidelines for how to compare and prioritize energy saving projects (EnSPs) before implementation, using economic and financial evaluation. It includes a common set of principles.

This document is applicable to all EnSPs and energy performance improvement actions (EPIAs) that are developed by stakeholders and organizations for improving energy performance, irrespective of the type and size of an organization and its energy use and consumption.

The methodology for quantification methods for predicted energy savings and measurement and verification (M&V) of the energy savings are not in the scope of this document.

NOTE The methodology for the estimation of the energy savings is critical when determining cost savings.

The methodology of the scenario generation (building) for future energy saving measures and actions is not covered by this document.

General rules and methodologies within this document can be used either independently or in conjunction with other standards and protocols.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

3.1
annual cost
sum of running costs and periodic costs or replacement costs paid on the year *n*

Note 1 to entry: The running cost is the money that needs to be spent regularly to run an *energy saving project* (3.11) or an *energy performance improvement action* (3.10), e.g. cost of maintenance, labour costs.

3.2
capital cost
initial construction costs and costs of initial adaptation where these are treated as capital *expenditure* (3.3)

[SOURCE: ISO 15686-5:2017, 3.1.2, modified — Note 1 to entry has been deleted.]

3.3
expenditure
money used to purchase, install and commission a capital asset

[SOURCE: ISO 15663-1:2000, 2.1.6, modified — “capital” has been deleted from the term.]

© ISO 2019 – All rights reserved

AVA Documents Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

3.4
cash flow
CF
movement of money into (cash inflow) or out of (cash outflow) a business, *project* (3.24) or financial product

Note 1 to entry: Cash flow is usually measured for a specified period.

3.5
discount rate
factor or rate reflecting the time value of money that is used to convert *cash flows* (3.4) occurring at different times to a common time

[SOURCE: ISO 15686-5:2017, 3.3.1]

3.6
direct cost
expense that can be traced directly to an *energy saving project* (3.11)

3.7
energy
electricity, fuels, steam, heat, compressed air and other similar media

Note 1 to entry: For the purposes of this document, energy refers to the various forms of energy, including renewable, which can be purchased, stored, treated, used in an equipment or in a process, and recovered.

[SOURCE: ISO 50001:2018, 3.5.1]

3.8
energy consumption
quantity of *energy* (3.7) applied

[SOURCE: ISO 50001:2018, 3.5.2]

3.9
energy performance
measurable result(s) related to energy efficiency, energy use and *energy consumption* (3.8)

[SOURCE: ISO 50001:2018, 3.4.3, modified — Notes 1 and 2 have been deleted.]

3.10
energy performance improvement action
EPIA
action or measure or group of actions or measures implemented or planned within an organization intended to achieve *energy performance* (3.9) improvement through technological, managerial, behavioural, economical, or other changes

[SOURCE: ISO 50015:2014, 3.5, modified — “or operational” has been deleted.]

3.11
energy saving project
EnSP
activity that is intended to contribute to a measurable reduction in *energy consumption* (3.8)

Note 1 to entry: An EnSP can also be intended to contribute to a reduction in greenhouse gas emissions.

Note 2 to entry: An EnSP includes at least one *energy performance improvement action* (3.10).

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

3.12
energy savings
reduction of *energy consumption* (3.8) following the implementation of an *energy performance improvement action* (3.10)

[SOURCE: ISO/IEC 13273-1:2015, 3.3.9]

3.13
hurdle rate
minimum rate of return on a *project* (3.24) or investment required by a manager or investor

3.14
indirect cost
expense that cannot be traced directly to an *energy saving project* (3.11)

3.15
inflation
sustained increase in the general price level

Note 1 to entry: Inflation can be measured monthly, quarterly or annually against a known index.

[SOURCE: ISO 15686-5:2017, 3.3.3, modified — "deflation" has been deleted.]

3.16
internal rate of return
IRR
discount rate (3.5) that gives a *net present value* (3.22) equal to zero

Note 1 to entry: IRR is also known as the discounted *cash flow* (3.4) rate of return.

Note 2 to entry: In the context of savings and loans, IRR is also known as the economic rate of return.

[SOURCE: ISO 26382:2010, 3.8]

3.17
interactive effect
significant *energy* (3.7) result occurring beyond the project boundary as a consequence of action(s) within the project boundary

Note 1 to entry: Correctly identifying and accounting for consequential effects mitigates the *risk* (3.27) of double counting when the results of various *energy performance improvement actions* (3.10) are combined.

Note 2 to entry: The consequential effect is limited to the boundaries of the authority of the management of the energy-using system.

EXAMPLE Changing the lighting system to be more efficient will have a consequential effect on the HVAC system. If the measurement boundary is the lighting system only, the consequential effect on the HVAC system should be described.

[SOURCE: ISO 17741:2016, 3.13, modified — Notes 1 and 2 have been replaced and the example has been slightly amended.]

3.18
life cycle cost
LCC
discounted cumulative total of all costs incurred by an *energy performance improvement action (EPIA)* (3.10) over its life cycle

Note 1 to entry: For an *energy saving project* (3.11), the discounted life cycle cost is the sum of all discounted costs of the constituent EPIAs, taking into consideration their respective lifetimes.

[SOURCE: ISO 15663-3:2001, 2.1.9, modified — "an energy performance improvement action" has replaced "a specified function or item of equipment" and Note 1 to entry has been added.]

© ISO 2019 – All rights reserved

AVA Documents Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

3.19
life cycle cost analysis
LCCA
methodology for the systematic economic evaluation of *life cycle costs* (3.18) over a period of analysis, as defined in the agreed scope

3.20
maintenance cost
total of necessarily incurred labour, material and other related costs incurred to retain equipment, a process or its parts in a state in which it can perform its required functions in an *energy saving project (EnSP)* (3.11)

Note 1 to entry: Maintenance includes conducting corrective, responsive and preventative maintenance on EnSPs, or their parts, and includes all associated management, cleaning, servicing, repairing and replacing of parts, where needed, to allow the EnSP and its parts to be used for its intended purposes.

[SOURCE: ISO 15686-5:2017, 3.1.9, modified — In the definition, "equipment, a process" has replaced "a building". In the note, "ENSPs" has replaced "constructed assets" and "repainting" has been deleted.]

3.21
minimum attractive rate of return
MARR
hurdle rate (3.13) for a *project* (3.24) within an organization

Note 1 to entry: MARR is used to determine the *net present value* (3.22).

Note 2 to entry: In capital budgeting, the *discount rate* (3.5) used is known the hurdle rate and is usually equal to the incremental cost of capital.

3.22
net present value
NPV
sum of the discounted future *cash flows* (3.4)

Note 1 to entry: NPV converts future cash flows using a given *discount rate* (3.5).

[SOURCE: ISO 15686-5:2017, 3.2.2, modified — Notes 1 and 2 to entry have replaced the Note 1 to entry.]

3.23
new project
project involving an energy using system that has not been installed or commissioned, such that the project cannot be considered and treated as a retrofit

[SOURCE: ISO 17741:2016, 3.16, Note 4 to entry]

3.24
project
unique process consisting of a set of coordinated and controlled activities with start and finish dates, undertaken to achieve an objective conforming to specific requirements including constraints of time, cost and resources

Note 1 to entry: An individual project may form part of a larger project structure and may consist of two or more *energy performance improvement actions* (3.10).

Note 2 to entry: The complexity of the interactions among project activities is not necessarily related to the project size.

Note 3 to entry: *Energy savings* (3.12) is the quantitative result as the project activities bring about reduction in the *energy consumption* (3.8) of energy-using systems within the project boundary.

Note 4 to entry: Retrofit project is a project conducted on an already existing energy-using system.

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

[SOURCE: ISO 17741:2016, 3.16, modified — Note 4 to entry has been deleted and Note 5 to entry renumbered accordingly.]

3.25
payback period
PP
period after which the initial capital invested has been paid back by the accumulated net revenue earned

[SOURCE: ISO 26382:2010, 3.13, modified — Note 1 to entry has been deleted.]

3.26
present value
PV
present worth
value of the *project* (3.24) *cash flow* (3.4) excluding the initial investment outlay

[SOURCE: ISO 15663-2:2001, 2.1.2, modified — "present worth" has been added as the admitted term.]

3.27
risk
effect of uncertainty on objectives

Note 1 to entry: An effect is a deviation from the expected. It can be positive, negative or both, and can address, create or result in opportunities and threats.

Note 2 to entry: Objectives can have different aspects and categories, and can be applied at different levels.

Note 3 to entry: Risk is usually expressed in terms of risk sources, potential events, their consequences and their likelihood.

[SOURCE: ISO 31000:2018, 3.1]

3.28
sensitivity analysis
test of the outcome of an analysis by altering one or more parameters from initial value(s)

[SOURCE: ISO 15686-5:2017, 3.2.5]

3.29
useful life
estimation of the median number of years of equipment life and accordingly the life of the *project* (3.24)

4 Symbols and abbreviated terms

For the purposes of this document, the following symbols, abbreviated terms and units apply.

Symbol/term	Description	Typical unit
A_n	annual investment (fixed and variable)	$
A_s	uniform annual saving	
A_t	net cash flow	$
$A_{t,i}$	annual costs, including variable and fixed annual costs and working capital cost	$
C_d	cost (or net proceeds) of disposal	$
C_e	cost of energy savings	$/kWh, $/MJ
C_i	initial cost of the system	$
C_m	cost of maintenance and repair	$

NOTE For simplicity, the financial unit of currency in this document is shown using a $ symbol. In practice, it will normally be in the local currency of the country where the EnSP is taking place.

© ISO 2019 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019

Symbol/term	Description	Typical unit
C_t	cash outflow (at the beginning of and during the project; this can include an initial investment)	$
DPP	discounted payback period	years
E_c	annual energy consumption	kWh, MJ
E_p	energy price	$
i	interest rate	%
IRR	internal rate of return	%
LCC	life cycle cost	$
n	lifetime of the system	years
NPV	net present value	$
PI	profitability index	—
PP	payback period	years
PV	present value	$
r	discount rate	%
R_t	cash inflow	$
SPP	simple payback period	years
t	time	years

NOTE For simplicity, the financial unit of currency in this document is shown using a $ symbol. In practice, it will normally be in the local currency of the country where the EnSP is taking place.

5 Planning an economic and financial evaluation of an EnSP

5.1 General

When planning and describing an EnSP, the costs and cash flows involved should be considered. As for any other investment, an EnSP should normally show a return on invested capital more than the hurdle rate.

NOTE The organization takes the decision as to whether the project return needs to exceed the hurdle rate. An EnSP can be done as part of the social licence to operate.

To be able to take a decision about the course of action on the recommendations of an energy audit, management needs to calculate all the costs associated with the project and determine the potential returns of the proposal.

This, however, is not quite as simple as it might first appear. Savings from EnSPs often decrease with time and EnSPs can require more maintenance, with higher associated costs, as they get older.

If an EnSP is self-financed or implemented using borrowed money, the opportunity cost of money or interest payments will apply. Both inflation and tax will influence the value of any future energy savings that can be achieved. It is therefore important that the economic and financial evaluation process allows for all these factors, with the aim of determining which EnSPs should be undertaken and of optimizing the benefits achieved. Consequently, a number of accounting and financial evaluation techniques have been developed to help decision-makers.

The detail of the financial evaluation should be proportionate to the size of the investment. Organizations may consider the level of detailed financial analysis in relation to the magnitude of the benefits and associated costs.

© ISO 2019 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 50044:2019