

**Implementation of
EN 29314-2:1993**

Information processing systems — Fibre Distributed Data Interface (FDDI) —

**Part 2: Token Ring Media Access
Control (MAC)**

The European Standard EN 29314-2:1993 has the status of a
British Standard

UDC 681.3.01:621.39:666.189.21:666.22

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/6, upon which the following bodies were represented:

- British Computer Society
- British Railways Board
- British Telecommunications plc
- Department of Trade and Industry (IT Standards Unit)
- Digital Equipment Co. Ltd.
- HM Treasury (Central Computer and Telecommunications Agency)
- IBM United Kingdom Ltd.
- Information Systems Committee of the Universities Funding Council
- International Computers Limited
- Logica UK Ltd.
- Ministry of Defence
- Rank Xerox Ltd.
- Swift Project Consortium

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 September 1992

© BSI 05-2000

The following BSI references relate to the work on this standard:
Committee reference IST/6
Draft for comment 92/61829 DC

ISBN 0 580 21192 4

Amendments issued since publication

Amd. No.	Date	Comments
8329	February 1995	Indicated by a sideline in the margin

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	2
Foreword	iii
Text of ISO 9314-2	1

National foreword

This British Standard reproduces verbatim ISO 9314-2:1989 and implements it as the UK national standard.

In 1993 the European Committee for Standardization (CEN) accepted ISO/IEC 9314-2:1989 as European Standard EN 29314-2:1993. As a consequence of implementing the European Standard this British Standard is renumbered as BS EN 29314-2 and any reference to BS ISO 9314-2:1989 should be read as a reference to BS EN 29314-2.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/6 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from BSI Sales Department, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, page 2, the ISO title page, pages ii to iv, pages 1 to 51 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

UDC 681.3.01:621.39:666.189.21:666.22

Descriptors: Data processing, information interchange, network interconnection, optical fibres, computer interfaces, communication procedures

English version

Information processing systems — Fibre Distributed Data
Interface (FDDI) —
Part 2: Token Ring Media Access Control (MAC)

(ISO 9314-2:1989)

Systèmes de traitement de l'information —
Interface de données distribuées sur fibre
(FDDI) —
Partie 2: Mécanisme d'accès au support de
l'anneau à jeton (MAC)
(ISO 9314-2:1989)

Informationsverarbeitungssysteme — Verteilte
Datenschnittstelle mit Lichtwellenleitern
(FDDI) —
Teil 2: Steuerungsverfahren für den
Mediumzugriff des Ringes mit
Sendeberechtigungsmarke (MAC)
(ISO 9314-2:1989)

This European Standard was approved by CEN on 1993-10-20. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

© 1993 Copyright reserved to CEN members

Foreword

On the proposal of the CEN Central Secretariat, the Technical Board decided to submit the International Standard: *Information processing systems — Fibre Distributed Data Interface (FDDI) — Part 2: Token Ring Media Access Control (MAC)* (ISO 9314-2:1989) to the formal vote.

The result of the formal vote was positive.

For the time being, this document exists only in English.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 1994, and conflicting national standards shall be withdrawn at the latest by April 1994.

In accordance with the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

INTERNATIONAL STANDARD

ISO
9314-2

First edition
1989-05-01

Information processing systems — Fibre Distributed Data Interface (FDDI) —

Part 2 : Token Ring Media Access Control (MAC)

*Systèmes de traitement de l'information — Interface de données distribuées sur
fibre (FDDI) —*

Partie 2 : Mécanisme d'accès au support de l'anneau à jeton (MAC)



Reference number
ISO 9314-2 : 1989 (E)

AVA **Documents**
Document Sharing Hub

Contents

	Page
Foreword	iii
Introduction	1
1 Scope	1
2 Normative references	1
3 Definitions	2
4 Conventions and abbreviations	4
4.1 Conventions	4
4.2 Abbreviations	4
5 General description	5
6 Services	7
6.1 MAC-to-LLC services	7
6.2 PHY-to-MAC services	10
6.3 MAC-to-SMT services	12
7 Facilities	18
7.1 Symbol set	18
7.2 Protocol Data Units	19
7.3 Fields	19
7.4 Timers	25
7.5 Frame counts	27
8 Operation	28
8.1 Overview	28
8.2 Structure	31
8.3 Receiver	32
8.4 Transmitter	37
Annex A (informative) Addressing hierarchical structuring for locally-administered addresses	48
A.1 General structure	48
A.2 Group addressing modes	48
Annex B (informative) Frame Check Sequence	49
B.1 Description	49
B.2 Generation of the FCS	49
B.3 Checking the FCS	50
B.4 Implementation	50
B.5 Related standards	51
Figure 1 — Token ring configuration example	6
Figure 2 — MAC receiver state diagram	44
Figure 3 — MAC transmitter state diagram	46
Figure B.1 — FCS implementation example	51
Table 1 — Interpretation of FC field	34

Descriptors: Data processing, information interchange, network interconnection, optical fibres, computer interfaces, communication procedure.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 9314-2 was prepared by Technical Committee ISO/TC 97, *Information processing systems*.

ISO 9314 consists of the following parts, under the general title *Information processing systems — Fibre Distributed Data Interface (FDDI)* —

- *Part 1: Token Ring Physical Layer Protocol (PHY)*;
- *Part 2: Token Ring Media Access Control (MAC)*;
- *Part 3: Token Ring Physical Layer, Medium Dependent (PMD)*.

Introduction

This part of ISO 9314 on the FDDI media access control is intended for use in a high-performance multistation network. This protocol is designed to be effective at 100 Mbit/s using a Token ring architecture and fibre optics as the transmission medium over distances of several kilometres in extent.

1 Scope

This part of ISO 9314 specifies the Media Access Control (MAC), the lower sublayer of the Data Link Layer (DLL), for Fibre Distributed Data Interface (FDDI).

FDDI provides a high-bandwidth (100 Mbit/s), general-purpose interconnection among computers and peripheral equipment using fibre optics as the transmission medium in a ring configuration. FDDI can be configured to support a sustained transfer rate of approximately 80 Mbit/s (10 Mbyte/s). It may not meet the response time requirements of all unbuffered high speed devices. FDDI establishes the connection among many stations distributed over distances of several kilometres in extent. Default values for the FDDI were calculated to accommodate rings of up to 1 000 physical links and a total fibre path length of 200 km (typically corresponding to 500 stations and 100 km of dual fibre cable).

FDDI consists of

- a) A Physical Layer (PL), which provides the medium, connectors, optical bypassing, and driver/receiver requirements. PL also defines encode/decode and clock requirements as required for framing the data for transmission on the medium or to the higher layers of the FDDI. For purposes of this part of 9314, references to the PL are made in terms of the Physical Layer entity designated PHY.
- b) A Data Link Layer (DLL), which is divided into two sublayers:
 - 1) A Media Access Control (MAC) which provides fair and deterministic access to the medium, address recognition, and generation and verification of frame check sequences. Its primary function is the delivery of frames, including frame insertion, repetition, and removal. The definition of MAC is contained in this part of ISO 9314.
 - 2) A Logical Link Control (LLC) which provides a common protocol to provide the required data assurance services between MAC and the Network Layer.
- c) A Station Management (SMT)¹⁾ which provides the control necessary at the station level to manage the processes under way in the various FDDI layers such that a station may work co-operatively on a ring. SMT provides services such as control of station initialization, configuration management, fault isolation and recovery, and scheduling procedures.

The MAC definition contained herein is designed to be as independent as possible from both the physical medium and the speed of operation. Concepts employed in ISO 8802-5, dealing with Token Ring MAC operation have been modified to accommodate the higher FDDI speeds, while retaining a similar set of services and facilities.

ISO 9314 specifies the interfaces, functions, and operations necessary to ensure interoperability between conforming FDDI implementations. This part of ISO 9314 provides a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 9314. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 9314 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 8802-2:—, *Information processing systems — Local Area Networks — Part 2: Logical Link Control (LLC)*²⁾.

ISO 8802-5:—, *Information processing systems — Local Area Networks — Part 5: Token Ring Access Method and Physical Layer specification*²⁾.

¹⁾ SMT will form the subject of a future part of ISO 9314.

²⁾ To be published.

ISO 9314-1:1989, *Information processing systems — Fibre Distributed Data Interface (FDDI) — Part 1: Token Ring Physical Layer Protocol (PHY)*.

ISO 9314-3:—, *Information processing systems — Fibre Distributed Data Interface (FDDI) — Part 3: Token Ring Physical Layer, Medium Dependent (PMD)*³⁾.

3 Definitions

For the purposes of this part of ISO 9314, the following definitions apply:

3.1

asynchronous

a class of data transmission service whereby all requests for service contend for a pool of dynamically allocated ring bandwidth and response time

3.2

capture

the act of removing a Token from the ring for the purpose of Frame transmission

3.3

claim token

a process whereby one or more stations bid for the right to initialize the ring

3.4

entity

an active functional agent within an Open System Interconnection (OSI) layer or sublayer, including both operational and management functions

3.5

fibre optics

the technology whereby optical signals from light-generating transmitters are propagated through optical fibre waveguides to light-detecting receivers

3.6

frame

a PDU transmitted between co-operating MAC entities on a ring, consisting of a variable number of octets and control symbols

3.7

media access control (MAC)

the Data Link Layer responsible for scheduling and routing data transmissions on a shared medium Local Area Network (e.g., an FDDI ring)

3.8

nonrestricted token

a Token denoting the normal mode of asynchronous bandwidth allocation, wherein the available bandwidth is time-sliced among all requesters

3.9

octet

a data unit composed of eight ordered bits (a pair of data symbols)

3.10

physical (PHY)

the Physical Layer responsible for delivering a symbol stream produced by an upstream MAC Transmitter to the logically adjacent downstream MAC Receiver in an FDDI ring

³⁾ To be published.

3.11**physical connection**

the full-duplex physical layer association between adjacent physical layer entities (in concentrators, repeaters, or stations) in an FDDI ring

3.12**primitive**

an element of the service interface presented by an entity

3.13**protocol data unit (PDU)**

the unit of data transfer between communicating peer layer entities. It may contain control information, address information, data (e.g., an SDU from a higher layer entity), or any combination of the three. The FDDI MAC PDUs are Tokens and Frames

3.14**receive**

the action of a station in accepting a Token, Frame, or other symbol sequence from the incoming medium

3.15**repeat**

the action of a station in receiving a Token or Frame from the adjacent upstream station and simultaneously sending it to the adjacent downstream station. The FDDI MAC may repeat received PDUs (Tokens and Frames), but does not repeat the received symbol stream between PDUs. While repeating a Frame, MAC may copy the data contents and modify the control indicators as appropriate

3.16**restricted token**

a Token denoting a special mode of asynchronous bandwidth allocation, wherein the bandwidth available for the asynchronous class of service is dedicated to a single extended dialogue between specific requesters

3.17**ring**

two or more stations connected by a physical medium wherein information is passed sequentially between active stations, each station in turn examining or copying and repeating the information, finally returning it to the originating station

3.18**service data unit (SDU)**

the unit of data transfer between a service user and a service provider

3.19**services**

a set of functions provided by one OSI layer sublayer entity, for use by a higher layer or sublayer entity or by management entities

3.20**station**

an addressable logical and physical attachment in a ring, capable of transmitting, receiving, and repeating information. An FDDI station has one or more PHY entities, one or more MAC entities, and one SMT entity

3.21**station management (SMT)**

the supervisory entity within an FDDI station that monitors and controls the various FDDI entities including PMD, MAC, and PHY

3.22**symbol**

the smallest signalling element used by MAC, i.e., the PHY SDU. The symbol set consists of 16 data symbols and 8 control symbols. Each symbol maps to a specific sequence of five code bits as transmitted by the Physical Layer

3.23

synchronous

a class of data transmission service whereby each requester is preallocated a maximum bandwidth and guaranteed a response time not to exceed a specific delay

3.24

token

an explicit indication of the right to transmit on a shared medium. On a Token Ring, the Token circulates sequentially through the stations in the ring. At any time, it may be held by zero or one station. FDDI uses two classes of Tokens: restricted and nonrestricted

3.25

transmit

the action of a station in generating a Token, Frame, or other symbol sequence and placing it on the outgoing medium

4 Conventions and abbreviations

4.1 Conventions

The terms SMT, MAC, LLC, and PHY, when used without modifiers, refer specifically to the local entities. The term LLC unless otherwise qualified refers to any local user of MAC data services, other than SMT, including ISO 8802-2.

Low lines (e.g., `requested_service_class`) are used as a convenience to mark the name of signals, functions, etc., that might otherwise be misinterpreted as independent individual words if they were to appear in text.

The use of a period (e.g., `MA_UNITDATA.request`) is equivalent to the use of low lines except that a period is used as an aid to distinguish modifier words appended to an antecedent expression.

4.1.1 Addressing

my short address (MSA): 16-bit Individual Address of this station (0 = Null).

my long address (MLA): 48-bit Individual Address of this station (0 = Null). If a station does not implement 48-bit addressing then MLA = 0.

short addresses: Set of 16-bit station Addresses including MSA if not Null, the 16-bit Broadcast Address (all ones), and any other 16-bit Group Addresses recognized by this station.

long addresses: Set of 48-bit Station Addresses including MLA if not Null, the 48-bit Broadcast Address (all ones), and any other 48-bit Group Addresses recognized by this station.

If a station does not implement 48-bit addressing, then MLA = 0.

When claiming the Token (i.e., the transmitter is in Claim Token state), if the station transmits with 16-bit addressing, then MLA = 0; conversely, if the station transmits with 48-bit addressing, then MSA = 0.

4.1.2 Timing values and timers

All timing values are expressed as the unsigned twos complements of the target, or remaining, time in octets, i.e., the numerically greater magnitude represents the shortest time remaining. This definition is for reference purposes only and does not prescribe the implementation, except where these timing values appear in Protocol Data Units on the ring. These timing values are not all used simultaneously in the state machines; consequently, the implementation need not materialize them when they are not needed.

For the purpose of the description contained in this part of ISO 9314, all timers are assumed to be initialized with the unsigned twos complement of the target, or remaining, time in octets. Timers are further assumed to count upward if enabled, expiring when an overflow occurs. All timer comparisons are expressed on the basis of elapsed time. These conventions are only for the convenience of documenting this part of ISO 9314 and do not prescribe implementation.

4.2 Abbreviations


Error_Ct Count of reportable frame errors

Frame_Ct Count of all frames received

Late_Ct	Count of TRT expirations (Token Lateness)
Lost_Ct	Count of PDUs detected as lost
A_Flag	Indicates Destination Address match in last received frame
C_Flag	Indicates successful copying of last received frame
E_Flag	Indicates error detected in last received frame
H_Flag	Indicates Higher Source Address received
L_Flag	Indicates Lower Source Address received
M_Flag	Indicates My Source Address received
N_Flag	Indicates next station addressing
R_Flag	Indicates the Token_class of the last valid Token received was restricted
A_Max	Maximum signal acquisition time
D_Max	Maximum ring latency time
F_Max	Maximum frame time
I_Max	Maximum station physical insertion time
L_Max	Maximum Transmitter Frame set-up time
M_Max	Maximum number of MAC entities allowed on the ring
S_Min	Minimum safety timing allowance
T_Bid_Rc	Bidding TTRT received by this station in Claim Frames
T_Bid_Tx	Bidding TTRT transmitted in this station's Claim Frames
T_Init	Ring initialization time
T_Max	Maximum TTRT to be supported by this station
T_Min	Minimum TTRT to be supported by this station
T_Neg	Negotiated TTRT during Claim process (in receiver)
T_Opr	Operative TTRT for this station (in transmitter)
T_Pri	Set of n priority Token rotation time thresholds
T_Pri(n)	Element n of the set T_Pri
T_React	Worst Case time to react to a station insertion or removal
T_Req	Requested TTRT for this station's synchronous traffic
T_Resp	Worst case time to recover a Token
THT	Token-Holding Timer
TRT	Token-Rotation Timer
TTRT	Target Token Rotation Time
TVX	Valid-Transmission Timer

5 General description

A Token ring consists of a set of stations serially connected by a transmission medium to form a closed loop (see Figure 1). Information is transmitted sequentially, as a stream of symbols, from one active station to the next. Each station generally regenerates and repeats each symbol and serves as the means for attaching one or more devices to the ring for the purpose of communicating with other devices on the ring. A given station (the one that has access to the medium) transmits information on to the ring, where the information circulates from one station to the next. The addressed destination station(s) copies the information as it passes. Finally, the station that transmitted the information effectively removes it from the ring.

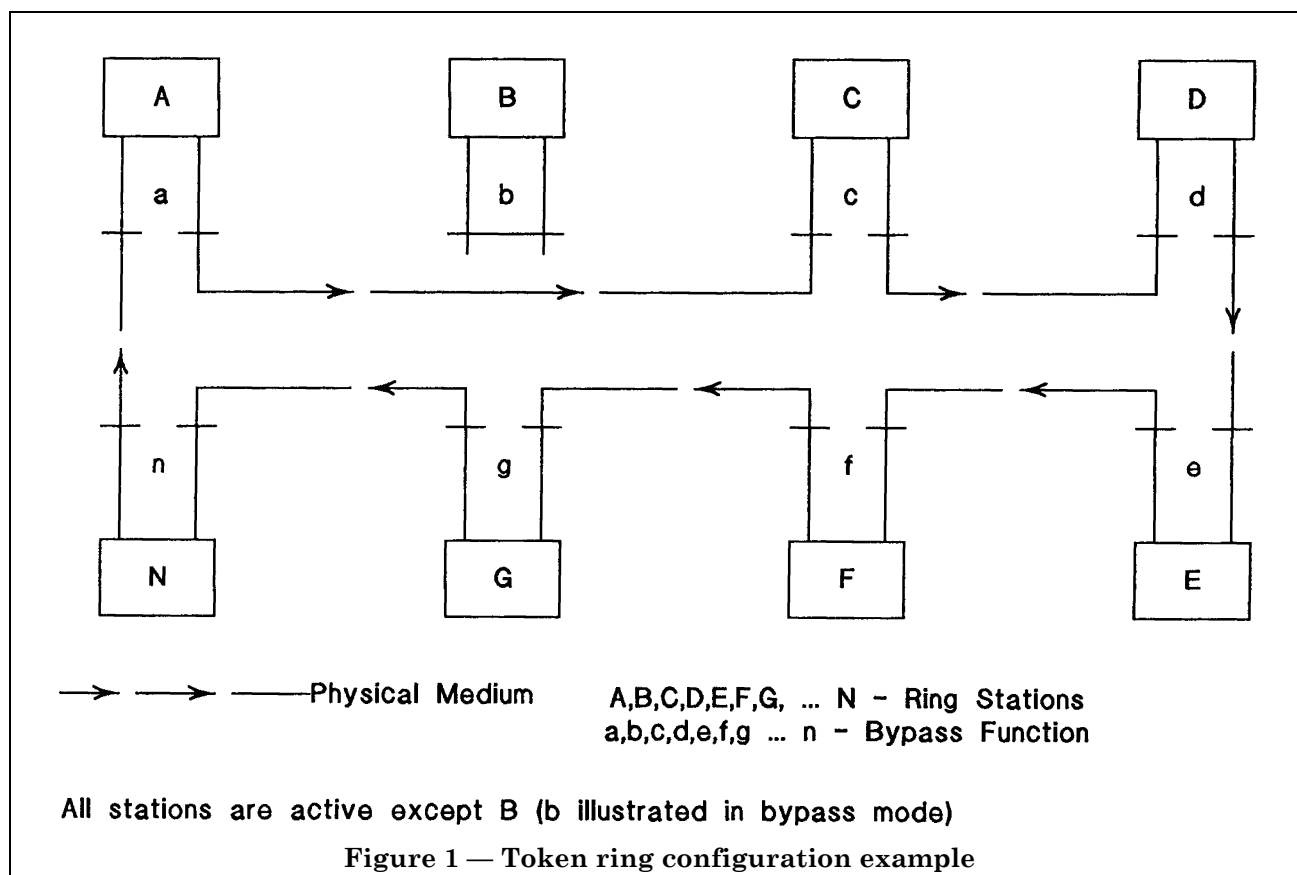

A station gains the right to transmit its information on to the medium when it detects a Token passing on the medium. The Token is a control signal comprised of a unique symbol sequence that circulates on the medium following each information transmission. Any station, upon detection of a Token, may capture the Token by removing it from the ring. The station may then transmit one or more frames of information. At the completion of its information transmission, the station issues a new Token, which provides other stations the opportunity to gain access to the ring.

A Token-holding timer, or equivalent means, limits the length of time a station may use (occupy) the medium before passing the Token.

Multiple levels of priority are available for independent and dynamic assignment depending upon the relative class of service required. The classes of service may be synchronous (typically used for applications such as real-time voice), asynchronous (typically used for interactive applications), or immediate (used for extraordinary applications such as ring recovery). The allocation of ring bandwidth occurs by mutual agreement among users of the ring.

Error detection and recovery mechanisms are provided to restore ring operation in the event that transmission errors or medium transients (e.g., those resulting from station insertion or removal) cause the access method to deviate from normal operation. Detection and recovery for these cases utilizes a recovery function that is distributed among the stations attached to the ring.

The media access method as specified herein is not intended to place constraints on the logical link control or higher level protocols employed to effect data transfer.

6 Services

This clause specifies the services provided by MAC and the services required by MAC. The intent is to allow higher-level protocol(s) (e.g., ISO 8802-2) to operate correctly with this MAC. How many of the services described in this clause are chosen for a given implementation is up to that implementer; however, a set of MAC services shall be supplied sufficient to satisfy the higher level protocol(s) being used. The services as defined herein do not imply any particular implementation, or any interface. Services described are

- a) MAC services provided to the local LLC entity, or other MAC users (indicated by MA_ prefix).
- b) Services required from the local PHY entity by MAC (indicated by PH_ prefix).
- c) MAC services provided to the local SMT entity (indicated by SM_MA_ prefix).

6.1 MAC-to-LLC services

This subclause specifies the services provided by the Medium Access Control (MAC) to allow the local LLC entity to exchange LLC service data units with peer LLC entities. These services are also used for implementer frames. The following primitives are defined:

MA_UNITDATA.request
 MA_UNITDATA.indication
 MA_UNITDATA_STATUS.indication
 MA_TOKEN.request

The description of each primitive includes a description of the information that is passed between the LLC and MAC entities.

6.1.1 MA_UNITDATA.request

This primitive defines the transfer of one or more Service Data Units (SDUs) from a local LLC entity to a single peer LLC entity, or to multiple peer LLC entities in the case of group addresses.

6.1.1.1 Semantics of the primitive

```
MA_UNITDATA.request      (
                           FC_value (1),
                           destination_address (1),
                           M_SDU (1),
                           requested_service_class (1),
                           stream (1),
                           FC_value (2),
                           destination_address (2),
                           M_SDU (2),
                           requested_service_class (2),
                           stream (2),
                           .
                           .
                           .
                           FC_value (n),
                           destination_address (n),
                           M_SDU (n),
                           requested_service_class (n),
                           stream (n),
                           Token_class
                           )
```

Each set of FC_value, destination_address, M_SDU, requested_service_class and stream parameters specifies one frame for transmission and is referred to as a subrequest.

The FC_value parameter supplies the Frame Control (FC) field to be transmitted as part of the frame.

The `destination_address` parameter may specify either an individual or a group MAC address. It shall contain sufficient information to create the DA (Destination Address) field that is included in the frame by MAC. Address length is determined by the L bit of the associated `FC_value` parameter (see 7.3.3).

Each `M_SDU` parameter specifies an LLC service data unit as received at the MAC interface to be transmitted by MAC. There is sufficient information associated with the `M_SDU` for MAC to determine the length of the service data unit. Associated with each `M_SDU` is a `requested_service_class` parameter.

`Requested_service_class` may be either Synchronous or Asynchronous. If asynchronous, the `requested_Token_class` and the priority level may optionally be specified.

`Stream` is a parameter that, if set, shall cause multiple `M_SDU`s to be transmitted as a result of the `MA_UNITDATA.request`. `Stream`, when reset, indicates that this `M_SDU` is the last one associated with this `MA_UNITDATA.request`. The frames shall be transmitted in the order presented by this primitive regardless of the associated `requested_service_class`. If TRT (Token-Rotation Timer) has expired (`Late_Ct` not = 0) or if a frame is encountered that cannot be transmitted because of its associated `requested_service_class` and the current value of THT (Token-Holding Timer), then transmission is terminated and a Token is issued as defined by the `Token_class` parameter. A

`MA_UNITDATA_STATUS.indication` is subsequently returned to LLC. If the `transmission_status` is successful, MAC may initiate transmission of the remaining frames on the next permitted access opportunity or, alternatively, MAC may require reissuance of a new `MA_UNITDATA.request`.

`Token_class` specifies the class of Token that MAC shall issue following transmission of the associated SDUs (i.e., at the end of the request), if no other request is pending that can be honoured. With requests for synchronous service the `Token_class` shall be the `Token_class` that was captured; with requests for asynchronous service it may be either restricted or nonrestricted. If no SDUs were specified by the `MA_UNITDATA.request`, then MAC shall immediately issue the requested class of Token.

6.1.1.2 When generated

This primitive is generated by the local LLC entity whenever data is to be transferred to a peer LLC entity or entities or a Token is to be generated. This may be in response to a request from higher layers of protocol or from data generated internally to LLC.

6.1.1.3 Effect of receipt

The receipt of this primitive shall cause MAC to append all MAC-specific fields, including DA, SA (Source Address), and any fields that are unique to the medium access method, and pass the properly formed frames to the lower layers of protocol for transfer to peer MAC entity or entities.

NOTE This primitive is the normal means of requesting the transfer of data. The capture of a Token is implicit in this primitive and therefore it is not necessary to issue an `MA_TOKEN.request` primitive in conjunction with it.

6.1.2 MA_UNITDATA.indication

This primitive defines the transfer of data from MAC to the local LLC entity.

6.1.2.1 Semantics of the primitive

```
MA_UNITDATA.indication      (
                             FC_value,
                             destination_address,
                             source_address,
                             M_SDU,
                             reception_status
                             )
```

The `FC_value` parameter specifies the value of the frame's FC (Frame Control) field. The `destination_address` parameter may be either an individual or a group address as specified by the DA field of the incoming frame. The `source_address` parameter is an individual address as specified by the SA field of the incoming frame. The `M_SDU` parameter shall specify the MAC service data unit as received by the local MAC entity.

The `reception_status` parameter indicates the success or failure of the incoming frame. It consists of the following elements:

- a) Frame validity: `FR_GOOD`, `FR_BAD`

- 1) **Invalid FCS:** Calculated FCS (Frame Check Sequence) does not match the received FCS
- 2) **Length Error:** The frame did not have a valid data length
- 3) **Internal Error:** An internal error has occurred that prevents MAC from transferring to LLC a frame that has been acknowledged by the setting of the A (address recognized) and C (frame copied) indicators.

The received E (error detected), A, C, and, optionally, any other Indicator values.

The MA_UNITDATA.indication primitive shall be generated by MAC to indicate to the local LLC entity the arrival of an LLC frame addressed to this station.

The effect of receipt of this primitive by the LLC entity is not specified.

This primitive shall provide an appropriate response to MA_UNITDATA.request primitive signifying the success or failure of the request.

```
MA_UNITDATA_STATUS.indication      (
    number_of_SDUs,
    transmission_status,
    provided_service_class
)
```

The `transmission_status` parameter shall be used to pass information back to the local requesting LLC entity. It shall be used to indicate the success or failure of the previous associated `MA_UNITDATA.request`. If the `MA_UNITDATA.request` primitive specified more than one `M_SDU`, then the `transmission_status` parameter may apply to all of the `SDUs` transmitted, indicating if all were acknowledged, via the `A` and `C` indicators, by a peer `MAC` entity. In this case, the resolution of the `transmission_status` is implementer defined.

6.1.3.2 When generated

6.1.3.3 *Effect of receipt*

NOTE In the event of multiple outstanding requests, additional information may be needed in order for LLC to associate the response with the appropriate request. The association may be implied by the requests being serviced in a first-in-first-out (FIFO) manner. Alternatively, MAC may maintain multiple queues of requests, at least one for each class_of_service implemented, servicing each of these queues in a FIFO manner. It is assumed that if the addressed peer MAC entity, or entities, acknowledge receipt of the frame(s) (by setting the A and C indicators), then either the frame(s) will be delivered, or an internal error will be reported, to the corresponding LLC entity, or entities, via an MA_UNITDATA.indication.

This primitive is used by LLC to request the capture of the next Token.

```
MA_TOKEN.request(
    requested_Token_class
)
```