

Implementation of ISO/IEC 8802-5:1992

Information technology — Local and metropolitan areas networks —

**Part 5: Token ring access method and
physical layer specifications**

UDC 681.3:621.39

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI
Documents

AVA

Document Sharing Hub

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/6, upon which the following bodies were represented:

- British Computer Society
- British Telecommunications plc
- CCTA (the Government Centre for Information Systems)
- Digital Equipment Co Ltd.
- IBM United Kingdom Ltd.
- Information Systems Committee of the Universities Funding Council
- Institution of Electrical Engineers
- International Computers Ltd.
- Logica UK Ltd.
- Ministry of Defence
- Rank Xerox Ltd.
- Swift Project Consortium

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 March 1994

© BSI 09-1999

The following BSI references relate to the work on this standard:
Committee reference IST/6
Draft for comment 90/65853 DC

ISBN 0 580 23037 6

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	viii
Text of ISO/IEC 8802-5	1

National foreword

This British Standard reproduces verbatim ISO/IEC 8802-5:1992 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/6 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from Customer Services, Publications, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to xiv, pages 1 to 71 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

INTERNATIONAL STANDARD

ISO/IEC
8802-5

IEEE
Std 802.5

First edition
1992-06-12

Information technology — Local and metropolitan area networks —

Part 5: Token ring access method and physical layer specifications

Technologies de l'information — Réseaux locaux et urbains —

*Partie 5: Méthode d'accès par anneau à jeton et spécifications pour la couche
physique*



Reference number
ISO/IEC 8802-5 : 1992 (E)
IEEE Std 802.5-1992

AVA Documents
Document Sharing Hub

Contents

	Page
Foreword	viii
1 General	1
1.1 Scope	1
1.2 Definitions	1
1.3 Abbreviations	4
1.4 References	6
1.5 Conformance Requirements	6
1.5.1 Static Conformance Requirements	7
1.5.2 Dynamic Conformance Requirements	7
2 General Description	8
3 Formats and Facilities	10
3.1 Formats	10
3.1.1 Token Format	11
3.1.2 Frame Format	11
3.1.3 Fill	11
3.2 Field Descriptions	11
3.2.1 Starting Delimiter (SD)	11
3.2.2 Access Control (AC)	12
3.2.3 Frame Control (FC)	12
3.2.4 Destination and Source Address (DA and SA) Fields	13
3.2.5 Routing Information (RI) Field	15
3.2.6 Information (INFO) Field	15
3.2.7 Frame-Check Sequence (FCS)	16
3.2.8 Ending Delimiter (ED)	17
3.2.9 Frame Status (FS)	17
3.3 Medium Access Control (MAC) Frames	17
3.3.1 Vector Description	18
3.3.2 Subvector Descriptions	19
3.3.3 Table of MAC Frames	21
3.4 Timers	21
3.4.1 Timer, Return to Repeat (TRR)	21
3.4.2 Timer, Holding Token (THT)	22
3.4.3 Timer, Queue PDU (TQP)	22
3.4.4 Timer, Valid Transmission (TVX)	22
3.4.5 Timer, No Token (TNT)	22
3.4.6 Timer, Active Monitor (TAM)	22
3.4.7 Timer, Standby Monitor (TSM)	22
3.4.8 Timer, Error Report (TER)	22
3.4.9 Timer, BCN Transmit (TBT)	22
3.4.10 Timer, BCN Receive (TBR)	22
3.5 Flags	22
3.5.1 I Flag	22
3.5.2 SFS Flag	22
3.5.3 MA Flag	22
3.5.4 SMP Flag	22
3.5.5 NN Flag	22
3.5.6 BR Flag	22
3.5.7 ETR Flag	22
3.5.8 NOT MA_Flag	25
3.6 Priority Registers and Stacks	25
3.6.1 Pr and Rr Registers	25

	Page
3.6.2	Sr and Sx Stacks 25
3.7	Latency Buffer 25
3.8	Counters 25
3.8.1	Line Error 25
3.8.2	Internal Error 25
3.8.3	Burst Error 25
3.8.4	AC Error 25
3.8.5	Abort Delimiter Transmitted (AD_TRANS) 25
3.8.6	Lost Frame Error (LOST_FR) 25
3.8.7	Receive Congestion Error (RCV_CON) 25
3.8.8	Frame Copied Error (FR_COPIED) 25
3.8.9	Frequency Error (FREQ) 25
3.8.10	Token Error 25
3.8.11	Frame Count (FR_CNT) 26
4	Token Ring Protocols 26
4.1	Overview 26
4.1.1	Frame Transmission 26
4.1.2	Token Transmission 26
4.1.3	Stripping 26
4.1.4	Frame Reception 26
4.1.5	Priority Operation 26
4.1.6	Beaconing and Neighbor Notification 27
4.1.7	Error Reporting 28
4.1.8	Administration of Ring Parameters 28
4.1.9	Configuration Control 29
4.1.10	Early Token Release (ETR) 29
4.2	Specification 29
4.2.1	Receive Actions 29
4.2.2	Operational Finite-State Machine 31
4.2.3	Standby Monitor Finite-State Machine 34
4.2.4	Active Monitor Finite-State Machine 38
5	Physical Layer 41
5.1	Symbol Encoding 41
5.2	Symbol Decoding 42
5.3	Data Signaling Rates 42
5.4	Symbol Timing 42
5.5	Latency Buffer 43
5.5.1	Assured Minimum Latency 43
5.5.2	Phase Jitter Compensation 43
6	Service Specifications 43
6.1	MAC to LLC Service 44
6.2	PHY to MAC Service 44
6.2.1	Interactions 44
6.2.2	Detailed Service Specifications 44
6.3	MAC to SMT Interaction 45
6.3.1	Overview of MAC Interaction 45
6.3.2	MAC Attributes 45
6.3.3	MAC Transients 47
6.4	PHY to SMT Interaction 50

	Page
6.4.1 Overview of PHY Management Interaction	50
6.4.2 PHY Transients	50
7 Station Attachment Specifications	50
7.1 Scope	50
7.2 Overview	50
7.3 Coupling of the Station to the Ring	51
7.4 Ring Access Control	51
7.4.1 Current and Voltage Limits	52
7.4.2 Insertion/Bypass Transfer Timing	53
7.5 Signal Characteristics	53
7.5.1 The Transmitter	53
7.5.2 The Channel	54
7.5.3 The Receiver	55
7.5.4 Error Rate	56
7.6 Reliability	56
7.7 Safety Requirements	56
7.8 Electromagnetic Emanation	56
7.9 Medium Interface Connector (MIC)	57
7.9.1 Medium Interface Connector — Contactor Detail	57
7.9.2 Medium Interface Connector — Locking Mechanism Detail	57
Annex A (informative) Address Structuring	60
Annex B (informative) LLC Type 3 Support	60
Annex C (normative) PICS Proforma	61
C.1 Introduction	61
C.2 Abbreviations and Special Symbols	61
C.2.1 Status Symbols	61
C.2.2 Abbreviations	61
C.3 Instructions for Completing the PICS Proforma	61
C.3.1 General Structure for the PICS Proforma	61
C.3.2 Additional Information	62
C.3.3 Exception Information	62
C.3.4 Conditional Status	62
C.4 Identification	63
C.4.1 Implementation Identification	63
C.4.2 Protocol Summary	63
C.5 Major Capabilities	63
C.6 PICS Proforma for the MAC Sublayer	64
C.6.1 Frame Formats	64
C.6.2 Destination and Source MAC Address Fields	64
C.6.3 Frame Parameters	65
C.6.4 MAC Frames	66
C.6.5 MAC Frame Subvectors	67
C.6.6 Timers	69
C.6.7 Flags	69
C.6.8 Priority Registers and Stacks	70
C.6.9 Counters	70
C.7 PICS Proforma for the Physical Layer	70
C.7.1 Symbol Encoding and Decoding	70
C.7.2 Data Signaling Rate	70

	Page
C.7.3 Symbol Timing	70
C.7.4 Latency Buffer	71
C.8 Station Attachment Specifications	71
C.8.1 Coupling of the Station to the Ring	71
C.8.2 Transmitter Characteristics	71
C.8.3 Receiver Characteristics	71
C.8.4 Medium Interface Connector	71
Figure 2-1 — Relation of OSI Reference Model to the LAN Model	8
Figure 2-2 — Token Ring Configuration	9
Figure 2-3 — Relationship of Data Stations, Servers, and System Manager	10
Figure 3-1 — MAC Frame Information Field Structure	15
Figure 4-1 — An Example of a Failure Domain	28
Figure 4-2 — Receive Action Table	30
Figure 4-3 — Operational Finite-State Machine	32
Figure 4-4 — Repeat State Loop Table	33
Figure 4-5 — Standby Monitor Finite-State Machine	36
Figure 4-6 — Standby State Transition Loop Table	37
Figure 4-7 — Active Monitor Finite-State Machine	39
Figure 5-1 — Example of Symbol Encoding	42
Figure 7-1 — Partitioning of PHY and Medium	51
Figure 7-2 — Example of Station Connection to the Medium	52
Figure 7-3 — Receive Signal Eye Pattern	54
Figure 7-4 — Medium Interface Connector — Isometric View	57
Figure 7-5 — Medium Interface Connector — Contactor Detail	58
Figure 7-6 — Medium Interface Connector — Locking Mechanism Detail	59
Table 3-1 — MAC Frames	23

**Technical Committee on Computer Communications of the
IEEE Computer Society**

Approved March 19, 1992

IEEE Standards Board

Abstract: This Local and Metropolitan Area Network standard, ISO/IEC 8802-5:1992, is part of a family of local area network (LAN) standards dealing with the physical and data link layers as defined by the ISO Open System Interconnection Reference Model. Its purpose is to provide compatible interconnection of data processing equipment by means of a local area network using the token-passing ring access method. The frame format, including delimiters, addressing, and frame-check sequence, are defined, and medium access control (MAC) frames, timers, and priority stacks are defined. The MAC protocol is defined. The finite-state machine and state tables are supplemented with a prose description of the algorithms. The physical layer (PHY) functions of symbol encoding and decoding, symbol time, and latency buffering are defined. The services provided by the MAC to the station management (SMT) and the services provided by the PHY to SMT and the MAC are described. These services are defined in terms of service primitives and associated parameters. The 4 and 16 Mb/s, shielded twisted pair attachment of the station to the medium, including the medium interface connector (MIC) are also defined. The applications environment for the LAN is intended to be commercial and light industrial. The use of token ring LANs in home and heavy industrial environments, while not precluded, has not been considered in the development of the standard. A Protocol Implementation Conformance Statement (PICS) proforma is provided as an annex to the standard.

Keywords: data processing interconnection, local area network (LAN), medium access control (MAC), token ring



**Adopted as an International Standard by the
International Organization for Standardization
and by the
International Electrotechnical Commission**



**Published by
The Institute of Electrical and Electronics Engineers, Inc.**

International Standard ISO/IEC 8802-5:1992

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

In 1985, ANSI/IEEE Std 802.5:1985 was adopted by ISO Technical Committee 97, *Information processing systems*, as draft International Standard ISO/DIS 8802-5. A further revision was subsequently approved by ISO/IEC JTC 1 in the form of this new edition, which is published as International Standard ISO/IEC 8802-5:1992.

For the purpose of assigning global addresses, the Institute of Electrical and Electronics Engineers, Inc., USA, has been designated by the ISO Council as the Registration Authority. Communications on this subject should be addressed to

Registration Authority for ISO/IEC 8802-5
c/o The Institute of Electrical and Electronics Engineers, Inc.
445 Hoes Lane
P.O. Box 1331
Piscataway, NJ 08855-1331
USA

During the preparation of this International Standard, information was gathered on patents upon which application of the standard might depend. Relevant patents were identified as belonging to Willemijn Holding BV. However, ISO cannot give authoritative or comprehensive information about evidence, validity or scope of patent and like rights. The patent-holder has stated that licences will be granted under reasonable terms and conditions and communications on this subject should be addressed to


Willemijn Holding BV
Weena 723
P.O. Box 29193
3001 GD Rotterdam
The Netherlands



International Organization for Standardization/International Electrotechnical Commission
Case postale 56 • CH-1211 Genève 20 • Switzerland

Foreword to International Standard ISO/IEC 8802-5:1992

This standard is part of a family of standards for Local and Metropolitan Area Networks. The relationship between this standard and the other members of the family is shown below. (The numbers in the figure refer to ISO standard numbers.)

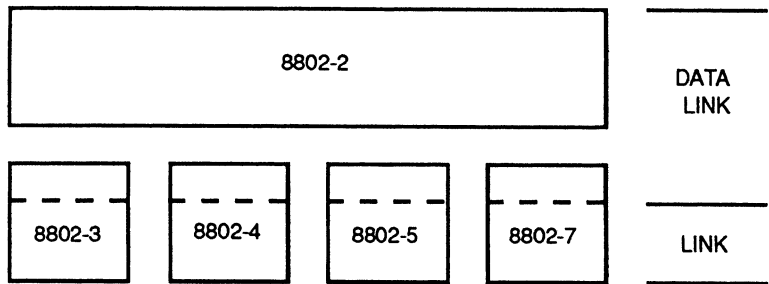

This family of standards deals with the physical and data link layers as defined by the ISO Open Systems Interconnection Basic Reference Model (ISO 7498:1984). The access standards define four types of medium access technologies and associated physical media, each appropriate for particular applications or system objectives. Other types are under investigation.

The standards defining these technologies are as follows:

- 1) ISO/IEC 8802-3 [ANSI/IEEE Std 802.3:1992 Edition], a bus utilizing CSMA/CD as the access method,
- 2) ISO/IEC 8802-4 [ANSI/IEEE Std 802.4:1990], a bus utilizing token passing as the access method,
- 3) ISO/IEC 8802-5 [IEEE Std 802.5:1992], a ring utilizing token passing as the access method,
- 4) ISO 8802-7, a ring utilizing slotted ring as the access method.

ISO 8802-2 [ANSI/IEEE Std 802.2:1989], Logical Link Control protocol, is used in conjunction with the medium access standards.

The reader of this document is urged to become familiar with the complete family of standards.

IEEE Std 802.5:1992

IEEE Standards documents are developed within the Technical Committees of the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Board. Members of the committees serve voluntarily and without compensation. They are not necessarily members of the Institute. The standards developed within IEEE represent a consensus of the broad expertise on the subject within the Institute as well as those activities outside of IEEE which have expressed an interest in participating in the development of the standard. Use of an IEEE Standard is wholly voluntary. The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least once every five years for revision or reaffirmation. When a document is more than five years old, and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard. Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of all concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason IEEE and the members of its technical committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.


Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE Standards Board
445 Hoes Lane, P.O. Box 1331
Piscataway, NJ 08855-1331
USA

IEEE Standards documents are adopted by the Institute of Electrical and Electronics Engineers without regard to whether their adoption may involve patents on articles, materials, or processes. Such adoption does not assume any liability to any patent owner, nor does it assume any obligation whatever to parties adopting the standards documents.

Foreword to IEEE Std 802.5:1992

(This Foreword is not a part of this International Standard or of IEEE 802.5:1992.)
This standard is part of a family of standards for local and metropolitan area networks. The relationship between the standard and other members of the family is shown below. (The numbers in the figure refer to IEEE standard numbers.)

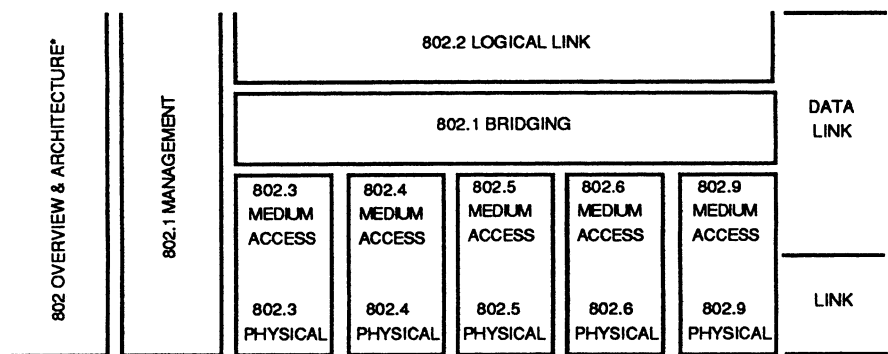

* Formerly IEEE Std 802.1A.

This family of standards deals with the physical and data link layers as defined by the ISO Open Systems Interconnection Basic Reference Model (ISO 7498:1984). The access standards define several types of medium access technologies and associated physical media, each appropriate for particular applications or system objectives. Other types are under investigation.

The standards defining these technologies are as follows:

- IEEE Std 802^a: Overview and Architecture. This standard provides an overview to the family of IEEE 802 Standards. This document forms part of the 802.1 scope of work.
- IEEE Std 802.1D: MAC Bridging. Specifies an architecture and protocol for the interconnection of IEEE 802 LANs below the MAC service boundary.
- IEEE Std 802.1E: System Load Protocol. Specifies a set of services and protocol for those aspects of management concerned with the loading of systems on IEEE 802 LANs.
- ISO 8802-2 [ANSI/IEEE Std 802.2]: Logical Link Control
- ISO/IEC 8802-3 [ANSI/IEEE Std 802.3]: CSMA/CD Access Method and Physical Layer Specifications
- ISO/IEC 8802-4 [ANSI/IEEE Std 802.4]: Token Bus Access Method and Physical Layer Specifications
- ISO/IEC 8802-5 [IEEE Std 802.5]: Token Ring Access Method and Physical Layer Specifications
- IEEE Std 802.6: Metropolitan Area Network Access Method and Physical Layer Specifications

^a The 802 Architecture and Overview Specification, originally known as IEEE Std 802.1A, has been renumbered as IEEE Std 802. This has been done to accommodate recognition of the base standard in a family of standards. References to IEEE Std 802.1A should be considered as references to IEEE Std 802.

In addition to the family of standards are technical advisory groups as follows:

- IEEE Std 802.7: Broadband Technical Advisory and Physical Layer Topics and Recommended Practices
- P802.8: Fiber Optic Technical Advisory and Physical Layer Topics

The reader of this document is urged to become familiar with the complete family of standards.

Conformance Test Methodology

A new standards series, identified by the number 1802, has been established to identify the conformance test methodology documents for the 802 family of standards. This makes the correspondence between the various 802 standards and their applicable conformance test requirements readily apparent. Thus the conformance test documents for 802.3 are numbered 1802.3, the conformance test documents for 802.5 will be 1802.5, and so on. Similarly, ISO will use 11802 to number conformance test standards for 8802 standards.

ISO/IEC 8802-5:1992 (IEEE Std 802.5:1992)¹⁾

This standard specifies that each octet of the information field shall be transmitted most significant bit (MSB) first. This convention is reversed from that used in the CSMA/CD and Token Bus standards, which are least significant bit (LSB) first transmission. While the transmission of MSB first is used for token ring, this does not imply that MSB transmission is preferable for any other local area network. Anyone considering interconnecting the token ring with other standard IEEE networks should keep in mind the need to perform bit reordering in the gateway between networks.

The following are now or have been voting members of the Token Ring Access Method Working Group (P802.5). Those individuals who have served as rapporteurs or editors are indicated by an asterisk next to their name:

Robert A. Donnan, Chair

H. Abramowicz	Clarence C. Joh	Claire Roden
Don Aelmore	Arthur D. Jopling	Bob Ross
Charles Amann	Dave Juhre	Floyd Ross
Steven C. Andersen	Jiro Kashio	Jacques A. Roth
A. Philip Arneth*	Carrell Killebrew	John Rovner*
Floyd Backes	Lisa Kelley	Chris Roussel
Jarred J. Baker	Bryan B. Kim	Don Roworth
Rey Bautista	Makoto Kuhno	Mike Rubera
Nicholas Beale*	David M. Kollm	Howard Rubin
Alan Beardsley*	Stan Kopec	Said Saadeh
Steve Belisle	William F. Kous	Howard Salwen
Daniel Boudreau	Robert Krebs	Haig A. Sarkissian
Randall Blair	Robert Krzyzanowski	Gordon Saussy
Charles Brill	Eiji Kuje	W. L. Schumacker
Philip Brownlee	David Laffitte	Tim Shafer
Patrik Bulteel	Bob Lapointe	Himanshu. Shah
Dr. Werner Bux	Katie D. Lee*	David Sheehy
Robert R. Campbell	Choon Lee	Naoshi Shima
Robert L. Carl	Laurie Lindsey	Marc Shoquist
Claude A. Cartee	Robert D. Love*	W. S. Shung
Hsin-Hwai Chen	Carl Madison	Somsubhra Sikdar

¹⁾ This standard contains the following supplements: IEEE Std 802.5d-1992 (Interconnected Token Ring LANs) and IEEE Std 802.5g:1992 (Conformance Testing).

Ramon Co	Alan C. Marshall*	Raymond Sit
Michael H. Coden	Jeffrey V. Marshik*	Bob Smith
Thomas Coradetti	Kelly P. McClellan	Robert Snyder
Guy Crowels	Jerry McKamey	Michael J. Sobieski
John DeCramer	John Melnick	Bob Southard
Rick Downs	John Messenger*	Louis Stankaitas
Hanoch Eldar	Colin Mick	Leo Staschover
Mohamed Elrefai	Arthur Miller*	Ed Sterling
Farzin Firoozmand	John E. Montague	Tom Swarthout
Gunnar Forsberg	Steven Moustakas	Richard Sweatt
Nathan Fritts	Bilal Murtaza	Andre Szczepanek
Yoshihiko Fujii	Narayan Murthy	D. T. W. Sze
Ron W. Gibson	Shigekatsu Nakao	Hidenori Takahashi
Harry Gold*	W. B. Neblett	Tokio Takai
Richard H. Gompertz	James Nelson	Marco Tamilia
Lisa Goulet	Ollie Nilsson	Paul Tan
Andrew Green	Andrew Norton	V. Tarassov
Fred Greim	Brian O'Connell	Lars Thernsjo
Siegmar Gross	Rasoul M. Oskouy	Scott Thomas
Robert Grow	Kathleen Otis	Nathan Tobol
Tom Gulick	Atul Pandya	Jeff Tong
Lee C. Haas	Guy Parker	Art Torino
Nubuhiro Hamada	Dave Pearce	Akihisa Toyooka
Sharam Hakimi	Dave Pfahler	John Trites
Floyd Halsey	Thanh Pham	Paul A. Trudgett
Charles F. Hanes*	Jeffrey Pickering	Bo Viklund
Takeshi Harakawa	Richard Podgalsky	John Q. Walker
James Harrer	Kirk Preiss*	Chang-Jung Wang
Bryan Hatfield	John Rance	Frank Wang
Carl G. Hayssen	Ivan Reede	Ian Watson
Tricia Hill	Francis E. Retnasothie	Kevin White
J, Paul Hittel	Everett O. Rigsbee III*	R. O. Westlake
Tom Hogan	Andrew L. Ringwald*	Jim Weisert
Tetsuo Isayama	Phil Robinson	Kevin White
Ben Wilson	Albert Wong	Barzilai Yoram
Peter Williams	Howard D. Wright	H. A. Zannini
Izumi Y. Wilson	Kazuhiko Yamada	Marshall Zerbo
Jacalyn Winkler*		Mo Zonoun

The following persons were on the balloting committee that approved IEEE Std 802.5:1992, IEEE Std 802.5d:1992 (Interconnected Token Ring LANs), and IEEE Std 802.5g:1992 (Conformance Testing) for submission to the IEEE Standards Board:

William B. Adams	Paul L. Hutton	Rafat Pirzada
Don Aelmore	Raj Jain	Urdo W. Pooch
Kit Athul	Jack R. Johnson	Thad L. D. Regulinski
Yong Myung Baeg	Reijo Juvonen	John P. Riganati
Alan L. Bridges	Robert W. Klessig	Gary S. Robinson
George Carson	Jens Kolind	Philip T. Robinson
Brian J. Casey	Jon Kramp	Victor Rozentouler
George C. Chachis	Michael Lawler	Norman Schneidewind
Robert A. Ciampa	Jai Yong Lee	Jeffrey R. Schwab
Gerald W. Cichanowski	F. C. Lim	Donald A. Sheppard
Michael H. Coden	Randolph S. Little	David M. Siefert
Robert Crowder	Donald S. Little	Robert K. Southard
Robert Donnan	Eduardo G. Marmol	Benjamin J. Stoppe, Jr.
Sourav Dutta	William McDonald	Fred J. Strauss
John E. Emrich	Richard H. Miller	Efstathiois Sykas
Philip H. Enslow	David S. Millman	Steven R. Taylor
Changxin Fan	C. B. Madhar Mishra	Geoffrey O. Thompson
John W. Fendrich	Wen Hsien Lim Moh	Robert Tripi
Harold C. Folts	John E. Montague	James T. Vorhies
Harvey A. Freeman	Kinji Mori	Donald F. Weir
Patrick Gonia	Gerald Moseley	Raymond Wenig
Abraham Grund	Charles E. Neblock	Michael Willett
Sandor V. Halasz	Ruth Nelson	Paul A. Willis
Joseph L. Hammond	Arne A. Nilsson	Jerry A. Wyatt
Lee A. Hollaar	Donal O'Mahony	Oren Yuen
Ivy P. Hsu	Charles Oestereicher	Stephen Zebrowski
	Andreas Pfitzmann	

When the IEEE Standards Board approved this standard on March 19, 1992, it had the following membership:

Marco W. Migliaro, *Chair*

Donald C. Loughry, *Vice Chair*

Andrew G. Salem, *Secretary*

Dennis Bodson	Donald N. Heirman	Donald T. Michael ^a
Paul L. Borrill	Ben C. Johnson	John L. Rankine
Clyde Camp	Walter J. Karplus	Wallace S. Read
Donald C. Fleckenstein	Ivor N. Knight	Ronald H. Reimer
Jay Forster ^a	Joseph L. Koepfinger ^a	Gary S. Robinson
David F. Franklin	Irving Kolodny	Martin V. Schneider
Ramiro Garcia	D. N. “Jim” Logothetis	Terrance R. Whitemore
Thomas L. Hannan	Lawrence V. McCall	Donald W. Zipse

^a Member Emeritus

Also included are the following nonvoting IEEE Standards Board liaisons:

Satish K. Aggarwal

James Beall

Richard B. Engelman

Stanley Warshaw

Paula M. Kelty

IEEE Standards Project Editor

1 General

1.1 Scope

For the purpose of compatible interconnection of data processing equipment via a local area network (LAN) using the token ring access method, this standard

- 1) Defines the frame format, including delimiters, addressing, routing information, and frame-check sequence (FCS), to allow operation on a single ring or on multiple rings connected by source routing or transparent bridges, and introduces medium access control (MAC) frames, timers, counters, and priority stacks (see Section 3);
- 2) Defines the MAC protocol. The finite-state machine and state tables are supplemented with a prose description of the algorithms (see Section 4);
- 3) Defines the physical layer (PHY) functions of symbol encoding and decoding, symbol timing, and latency buffering (see Section 5);
- 4) Describes the services provided by the MAC to the station management (SMT) and the logical link control sublayer (LLC) and the services provided by the PHY to SMT and the MAC. These services are defined in terms of service primitives and associated parameters (see Section 6);
- 5) Defines the 4 and 16 Mb/s, shielded twisted pair attachment of the station to the medium including the definition of the medium interface connector (MIC) (see Section 7);
- 6) Includes the PICS proforma in compliance with the relevant requirements, and in accordance with the relevant guidance, given in ISO 9646-2 [7]²⁾ (see Annex C).

The definition of suitable media (twisted pair, coaxial cable, and optical fiber) for connecting stations that meet the attachment standard specified herein is a subject for future consideration. Until such time as these media are specified, the specifications in Section 7 shall define the performance bounds to which an operating network, including media and trunk coupling unit(s) (TCUs), shall conform.

A particular emphasis of this standard is to specify the homogeneous externally visible characteristics needed for interconnection compatibility, while avoiding unnecessary constraints upon and changes to internal design and implementation of the heterogeneous processing equipment to be interconnected.

The applications environment for the LAN is intended to be commercial and light industrial. The use of token ring LANs in home and heavy industrial environments, while not precluded, has not been considered in the development of this standard.

1.2 Definitions

abort sequence

a sequence that terminates the transmission of a frame prematurely

accumulated jitter

the jitter measured against the clock of the active monitor. Like alignment jitter, this is not a type of jitter but a way to measure total jitter growth throughout the ring. It is normally used to determine the required size of the elastic buffer

alignment jitter

the jitter measured against the clock of the upstream adapter. This is not a type of jitter per se; rather, it is a way to measure jitter. When “zero transferred jitter” is specified, the jitter measured is alignment jitter

broadcast transmission

a transmission addressed to all stations

channel

the channel is the transmission path from the MIC at the transmitter to the first MIC at the receiver. It may include TCUs and connectors in addition to transmission line

²⁾ The numbers in the brackets correspond to those of the references in 1.4.

configuration report server (CRS)

a function that controls the configuration of the ring. It receives configuration information from the stations on the ring and either forwards them to the network manager or uses them to maintain a configuration of the ring. It can also, when requested by the network manager, check the status of stations on the ring, change operational parameters of stations on the ring, and remove stations from the ring

correlated jitter

the portion of the total jitter that is related to the data pattern. Since every adapter receives the same *pattern*, this jitter is *correlated* among all adapters and therefore grows in a *systematic* way along the ring. Correlated jitter is also called *pattern jitter* or *systematic jitter*

differential Manchester encoding

a signaling method used to encode clock and data bit information into bit symbols. Each bit symbol is split into two halves, where the second half is the inverse symbol of the first half. A 0 bit is represented by a polarity change at the start of the bit time. A 1 bit is represented by no polarity change at the start of the bit time. Differential Manchester encoding is polarity-independent

fill

a bit sequence that may be either 0 bits or 1 bits or any combination thereof

frame

a transmission unit that carries a protocol data unit (PDU) on the ring

jitter

the time-varying difference between the phase of the recovered clock and the phase of the source clock. Jitter is measured in fractions of a clock cycle, or unit interval (UI)

logical link control (sublayer)(LLC)

that part of the data link layer that supports media-independent data link functions, and uses the services of the MAC to provide services to the network layer

medium

the material on which the data may be represented. Twisted pairs, coaxial cables, and optical fibers are examples of media

medium access control (sublayer) (MAC)

the portion of the data station that controls and mediates the access to the ring

medium interface connector (MIC)

the connector between the station and TCU at which all transmitted and received signals are specified

monitor

the monitor is that function that recovers from various error situations. It is contained in each ring station; however, only the monitor in one of the stations on a ring is the *active monitor* at any point in time. The monitor function in all other stations on the ring is in stand by mode

multiple frame transmission

a transmission where more than one frame is transmitted when a token is captured

physical (layer)(PHY)

the layer responsible for interfacing with the medium, detecting and generating signals on the medium, and converting and processing signals received from the medium and the MAC

protocol data unit (PDU)

information delivered as a unit between peer entities that contains control information and, optionally, data

protocol implementation conformance statement (PICS)

a statement of which capabilities and options have been implemented for a given Open Systems Interconnection protocol

repeat

the action of a station in receiving a bit stream (for example, frame, token, or fill) from the previous station and placing it on the medium to the next station. The station repeating the bit stream may copy it into a buffer or modify control bits as appropriate

repeater

a device used to extend the length, topology, or interconnectivity of the transmission medium beyond that imposed by a single transmission segment

ring error monitor (REM)

a function that collects ring error data from ring stations. The REM may log the received errors, or analyze this data and record statistics on the errors

ring latency

in a token ring MAC system, the time (measured in bit times at the data transmission rate) required for a signal to propagate once around the ring. The ring latency time includes the signal propagation delay through the ring medium plus the sum of the propagation delays through each station connected to the token ring

ring parameter server (RPS)

that function that is responsible for initializing a set of operational parameters in ring stations on a particular ring

routing information

a field, carried in a frame, used by source routing transparent bridges that provides source routing operation in a bridged LAN

service data unit (SDU)

information delivered as a unit between adjacent entities that may also contain a PDU of the upper layer

source routing

a mechanism to route frames, through a bridged LAN. Within the source routed frame, the station specifies the route that the frame will traverse

station (or data station)

a physical device that may be attached to a shared medium LAN for the purpose of transmitting and receiving information on that shared medium. A data station is identified by a destination address (DA)

static phase offset

the constant difference between the phase of the recovered clock and the optimal sampling position of the received data

station management (SMT)

the conceptual control element of a station that interfaces with all of the layers of the station and is responsible for the setting and resetting of control parameters, obtaining reports of error conditions, and determining if the station should be connected to or disconnected from the medium

token

the symbol of authority that is passed between stations using a token access method to indicate which station is currently in control of the medium

transferred jitter

the amount of jitter in the recovered clock of the upstream adapter. Transferred jitter is important because each adapter must both limit the amount of jitter it generates, and track the jitter delivered by the upstream adapter

transmit

the action of a station generating a frame, token, abort sequence, or fill and placing it on the medium to the next station. In use, this term contrasts with *repeat*

transparent bridging

a bridging mechanism, in a bridged LAN, that is transparent to the end stations

trunk cable

the transmission cable that interconnects two TCUs

trunk coupling unit (TCU)

a physical device that enables a station to connect to a trunk cable. The TCU contains the means for inserting the station into the ring or, conversely, bypassing the station

uncorrelated jitter

the portion of the total jitter that is independent of the data pattern. This jitter is generally caused by noise that is uncorrelated among adapters and therefore grows in a nonsystematic way along the ring. Uncorrelated jitter is also called *noise jitter* or *nonsystematic jitter*

unit interval (UI)

one half of a bit time. 125 ns for 4 Mb/s transmission and 31.25 ns for 16 Mb/s transmission. UI is used in the specification of jitter

upstream neighbor's address (UNA)

the address of the station functioning upstream from a specific station

1.3 Abbreviations

A	=	address-recognized bit
AC	=	access control (field)
AD	=	abort delimiter
AMP	=	active monitor present
BCN	=	beacon
BR	=	beacon receive
C	=	frame-copied bit
CL	=	claim
CON	=	congestion
CNT	=	count
CRS	=	configuration report server
DA	=	destination address
DAT	=	duplicate address test
DC	=	destination class
E	=	error-detected bit
ED	=	ending delimiter
EFS	=	end-of-frame sequence
ETR	=	early token release
FA	=	functional address
FAI	=	functional address indicator
FC	=	frame control (field)
FCS	=	frame-check sequence
FR	=	frame
FS	=	frame status (field)
FSM	=	finite state machine
I	=	intermediate frame bit
INIT	=	initialization
LAN	=	local area network
LLC	=	logical link control (sublayer)

LTH	=	length bits
M	=	monitor bit
MA	=	my (station's) address
MAC	=	medium access control (sublayer)
MIC	=	medium interface connector
MVID	=	major vector identification
NN	=	neighbor notification
P	=	priority (of the AC)
PDU	=	protocol data unit
PHY	=	physical (layer)
PICS	=	protocol implementation conformance statement
Pm	=	priority of queued PDU
Pr	=	last priority value received
PRG	=	purge
Px	=	the greater value of Pm or Rr
R	=	reservation (of the AC)
RI	=	routing information
RII	=	routing information indicator
REM	=	ring error monitor
RPS	=	ring parameter server
RPT	=	report
RQ	=	request
Rr	=	last reservation value received
RUA	=	received upstream neighbor's address
SA	=	source address
SC	=	source class
SD	=	starting delimiter
SDU	=	service data unit
SFS	=	start-of-frame sequence
SMP	=	standby monitor present
SMT	=	station management
Sr	=	highest stacked received priority
SRT	=	source routing transparent
SV	=	subvector
SVI	=	subvector identifier
SVL	=	subvector length
SUA	=	stored upstream neighbor's address
Sx	=	highest stacked transmitted priority
TA	=	transmit asymmetry
TAM	=	timer, active monitor
TBT	=	timer, BCN transmit
TBR	=	timer, BCN receive
TCU	=	trunk coupling unit
TER	=	timer, error report
THT	=	timer, holding token
TK	=	token
TNT	=	timer, no token

TQP	=	timer, queue PDU
TRR	=	timer, return to repeat
TSM	=	timer, standby monitor
TVX	=	timer, valid transmission
TX	=	transmit
UI	=	unit interval
UNA	=	upstream neighbor's address
VI	=	vector identifier
VL	=	vector length

1.4 References

The following standards contain provisions which, through reference in this text, constitute provisions of ISO/IEC 8802-5:1992. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on ISO/IEC 8802-5:1992 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of ISO and IEC maintain registers of currently valid International Standards.

[1] CISPR Publication 22:1985, *Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment*³⁾.

[2] IEC Publication 435:1983, *Safety of data processing equipment*.

[3] IEC Publication 950:1986, *Safety of information technology equipment including electrical business equipment*.

[4] ISO 7498:1984, *Information processing systems — Open Systems Interconnection — Basic Reference Model*⁴⁾.

[5] ISO/IEC 7498-4:1989, *Information processing systems — Basic Reference Model — Part 4: Management framework*.

[6] ISO/IEC 9646-1:1991, *Information technology — OSI conformance testing methodology and framework — Part 1: General concepts*.

[7] ISO 9646-2:1991, *Information technology — OSI conformance testing methodology and framework — Part 2: Abstract test suite specification*.

[8] ISO/IEC DIS 10038 DAM 2, *MAC Bridging, Source Routing Supplement*⁵⁾.

[9] ISO/IEC 10039:1991 *Information processing systems — Open Systems Interconnection — Local area networks — MAC service definition*.

1.5 Conformance Requirements

The supplier of a protocol implementation which is claimed to conform to this standard shall complete a copy of the PICS proforma in Appendix C and shall provide the information necessary to identify both the supplier and the implementation.

³⁾ CISPR and IEC publications are available from the International Electrotechnical Commission, 3 rue de Varembe, Case Postal 131, CH-1211, Genève 20, Switzerland/Suisse. These publications are also available in the United States from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036 USA.

⁴⁾ ISO and IEC publications are available from ISO, Case Postal 56, 1 rue de Varembe, CH-1211 Genève 20, Switzerland/Suisse. These publications are also available in the United States from the Sales Department, American National Standards Institute, 11 West 42nd Street, 13th Floor, New York, NY 10036 USA.

⁵⁾ ISO/IEC 10038:....AMD 1:....., to be approved and published.

1.5.1 Static Conformance Requirements

1.5.1.1 Medium Access Control Sublayer. An implementation claiming conformance to this standard

- 1) Shall implement the token format, the frame format, associated address formats and fields, and MAC frame vectors and subvectors as defined in 3.1, 3.2 and 3.3.
- 2) Shall use at least one of the following: 48-bit universally administered addresses, 48-bit locally administered addresses, or a 16-bit locally administered addresses. Note that the implementation may support any or all three address formats.
- 3) Shall exhibit external behavior corresponding to the timer values specified in 3.4.
- 4) Shall exhibit external behavior corresponding to the flags specified in 3.5. Note that the Early Token Release function is optional (3.5.7).
- 5) Shall exhibit external behavior corresponding to the priority registers and stacks specified in 3.6.
- 6) May, optionally, implement capabilities corresponding to the counters defined in 3.8. Note that the Frame Count function, 3.8.11, is mandatory if the Early Token Release function is implemented.
- 7) Shall recognize the first bit of the source address as the indication of the presence of the routing information field in the frame format. Note that the ability to generate or process frames with source routing information is optional.

1.5.1.2 Physical Layer. An implementation claiming conformance to this standard shall

- 1) Add latency as defined in 3.7 and 5.5.1.
- 2) Encode and decode symbols as defined in 5.1 and 5.2.
- 3) Use a data signaling rate at either 4 or 16 Mb/s as defined in 5.3. Note that the implementation may support both data signaling rates.
- 4) Time the symbols with a phase and frequency lock as defined in 5.4.
- 5) Compensate for phase jitter with accumulated bit jitter amplitude as defined in 5.5.2.
- 6) Couple to the trunk with a ring access control mechanism as defined in 7.3 and 7.4.
- 7) Transmit differential Manchester signals with the characteristics defined in 7.5.1 when the channel operates as defined in 7.5.2. Either of the two transmitter signal waveforms may be used.
- 8) Receive differential Manchester signals with the characteristics as defined in 7.5.3 when connected to the channel defined in clause 7.5.2 and a transmitter defined in 7.5.1.
- 9) Use a medium interface connector as defined in 7.9.
- 10) Provide an output error rate to the station as described in 7.5.4.

1.5.2 Dynamic Conformance Requirements. An implementation claiming conformance to this standard shall perform the following actions as represented in abstract form by the finite-state machine transitions in Figure 4-2 through Figure 4-7. The station shall

- 1) Receive frames and perform the actions indicated in Figure 4-2.
- 2) Receive and utilize tokens for the transmission of queued PDUs as described in Figure 4-3.
- 3) Transmit queued PDUs as frames as described in Figure 4-3.
- 4) Strip frames as described in Figure 4-3.
- 5) Transmit tokens as described in Figure 4-3 (Note that the implementation of the ETR flag is optional, see 3.5.7).
- 6) Perform the priority operation as described in Figure 4-3.
- 7) Perform actions indicated in Figure 4-4.
- 8) Queue DAT_PDU, SMP_PDU, and RQ_INIT_PDU under the conditions described in Figure 4-4 for transmission by Figure 4-3.
- 9) Autonomously transmit CL_TK and FR_BCN frames under the conditions described in Figure 4-5.
- 10) Enter BYPASS under the conditions described in Figure 4-5.
- 11) Assume ACTIVE MONITOR STATE under the conditions described in Figure 4-5.
- 12) Queue the PDUs of Figure 4-6 as indicated for transmission by Figure 4-3.
- 13) Autonomously transmit fill and PURGE PDUs as indicated in Figure 4-7.

- 14) Queue the PDUs of Figure 4-7 as indicated for transmission by Figure 4-3.
- 15) Enter STANDBY MONITOR STATE under the conditions described in Figure 4-7.
- 16) Enter BYPASS under the conditions described in Figure 4-7.

2 General Description

There are two important ways to view local area network design: architectural, which emphasizes the logical divisions of the system and how they fit together, and implementational, which emphasizes the actual components, their packaging, and their interconnection.

This standard presents the architectural view, emphasizing the large-scale separation of the system into two parts: the MAC of the data link layer and the PHY. These layers are intended to correspond closely to the lowest layers of the ISO Basic Reference Model of OSI (ISO 7498 [4]). The LLC and MAC together encompass the functions intended for the data link layer of the OSI model.


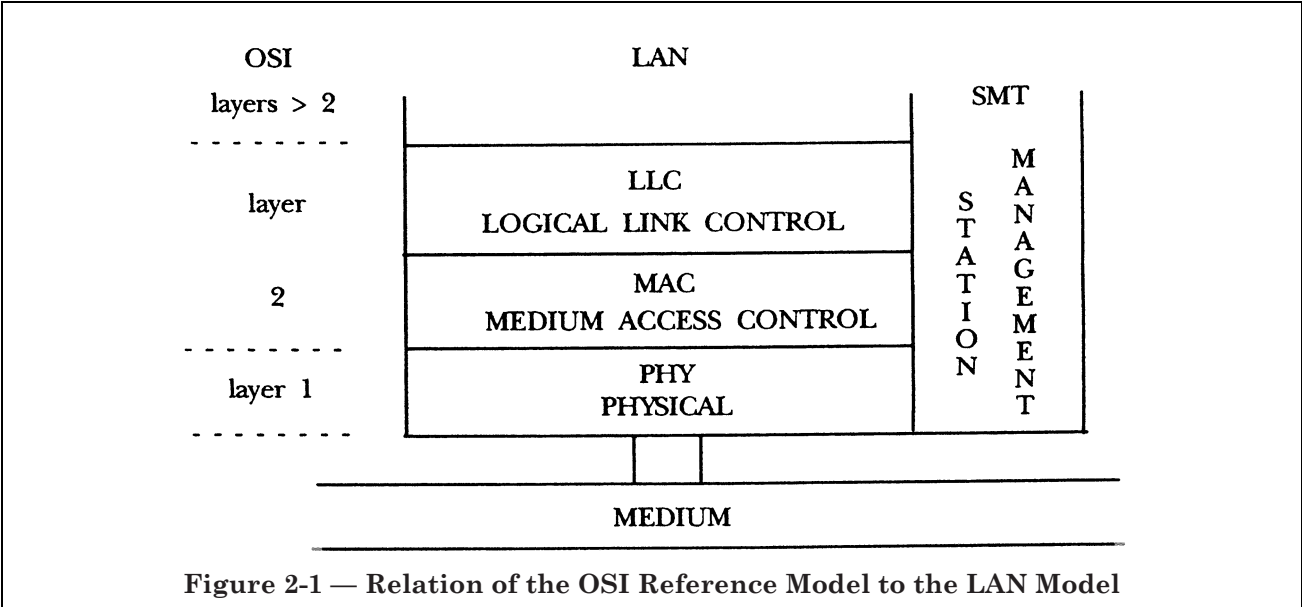


Figure 2-1 — Relation of the OSI Reference Model to the LAN Model

An architectural organization of the standard has the advantages of clarity (a clean overall division of the design along architectural lines makes the standard clearer) and flexibility (segregation of the access-method-dependent aspects of the MAC and PHY allows the LLC to apply to a variety of LAN access methods).

It should be noted that the exact relationship of the layers described in this standard to the layers defined by the OSI Reference Model is for further study.

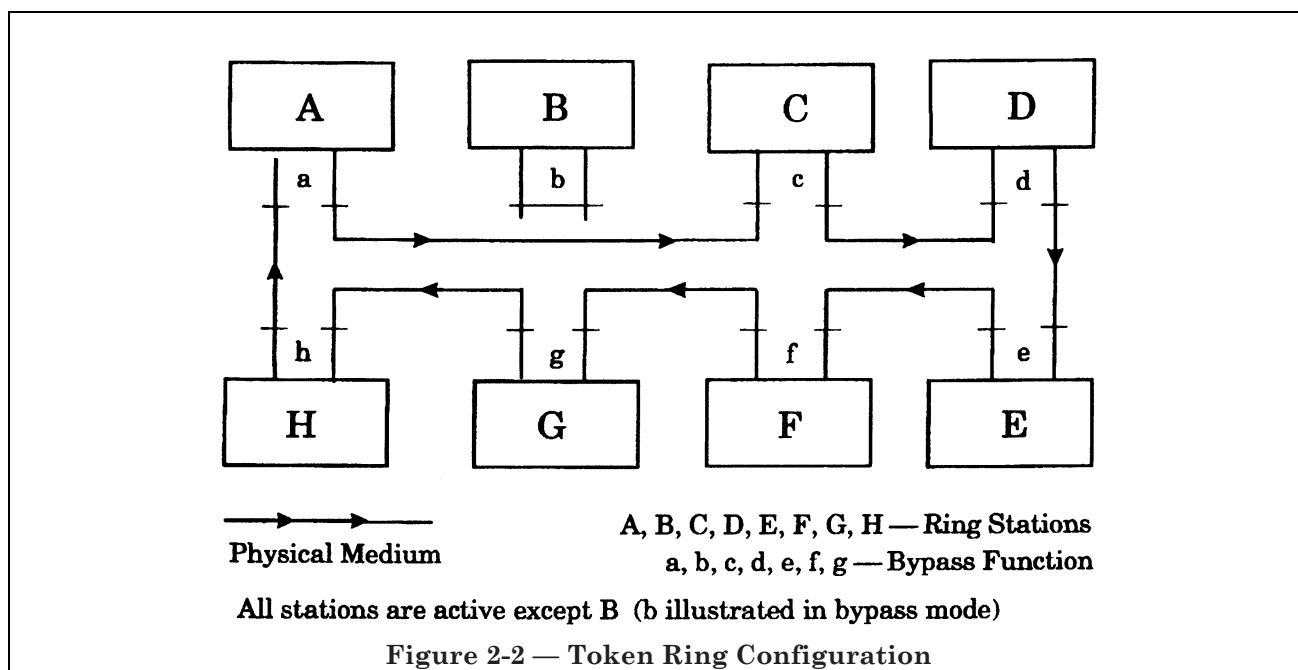

A token ring consists of a set of stations serially connected by a transmission medium (see Figure 2-2). Information is transferred sequentially, bit by bit, from one active station to the next. Each station generally regenerates and repeats each bit and serves as the means for attaching one or more devices (terminals, work stations) to the ring for the purpose of communicating with other devices on the network. A given station (the one that has access to the medium) transfers information onto the ring, where the information circulates from one station to the next. The addressed destination station(s) *copies* the information as it passes. Finally, the station that transmitted the information effectively removes the information from the ring.

A station gains the right to transmit its information onto the medium when it detects a token passing on the medium. The token is a control signal comprised of a unique signaling sequence that circulates on the medium following each information transfer. Any station, upon detection of an appropriate token, may capture the token by modifying it to a SFS and appending appropriate control and status fields, address fields, information field, FCS, and the EFS. At the completion of its information transfer and after appropriate checking for proper operation, the station initiates a new token, which provides other stations the opportunity to gain access to the ring.

A THT controls the maximum period of time a station shall use (occupy) the medium before passing the token.

Multiple levels of priority are available for independent and dynamic assignment depending upon the relative class of service required for any given message, for example, synchronous (real-time voice), asynchronous (interactive), immediate (network recovery). The allocation of priorities shall be by mutual agreement among users of the network.

Error detection and recovery mechanisms are provided to restore network operation in the event that transmission errors or medium transients (for example, those resulting from station insertion or removal) cause the access method to deviate from normal operation. Detection and recovery for these cases utilize a network monitoring function that is performed in a specific station with back-up capability in all other stations that are attached to the ring.