


FED. SUPPLY CLASS

5325

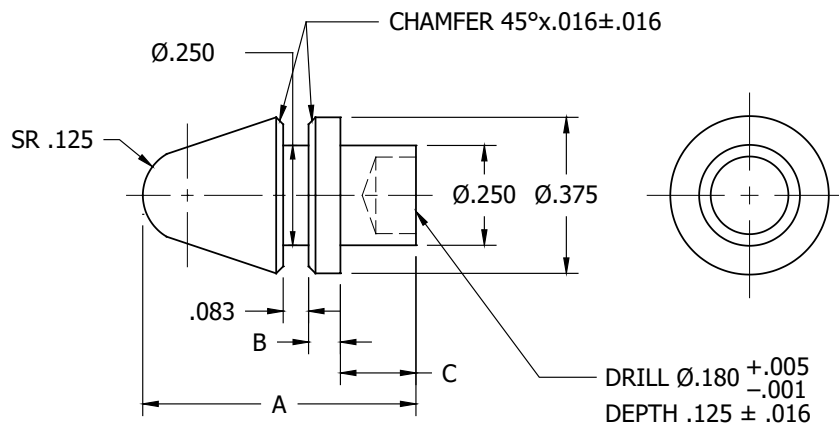

② TABLE I – DIMENSIONS

DASH NO.	A ±.015	B	C ±.016
1	.736	.080	.156
2	.792	.105	.188
3	.792	.250	.156

MATERIAL:

CRES, CLASS 303 (UNS S30300) OR 410 (UNS S41000), PER ~~QQ-S-763~~ AMS-QQ-S-763.

FINISH:

PASSIVATE.

CODE:


② MS21323-1
 ——— SIZE (TABLE I)
 ——— BASIC NUMBER

EXAMPLE OF PART NUMBER:

② MS21323-1 = STUD, STYLE I, SNAPSLIDE FASTENER; CRES; .736.

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21323, REVISION A. PART NUMBERS REMAIN MS21323.

THIRD
ANGLE
PROJECTION



CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION
2

PROCUREMENT
SPECIFICATION

NONE

TITLE

STUD, STYLE I, SNAPSLIDE FASTENER

CLASSIFICATION
PART STANDARD

MS21323

SHEET 1 OF 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY THERETO OF PATENT OR TRADEMARKS RIGHTS.

NOTES:

- (1) REMOVE ALL BURRS AND SHARP EDGES.
- (2) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (3) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS $\pm .002$; ANGLES $\pm 2^\circ$.
- (4) TO BE USED WITH MS21332.
- (5) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (6) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (7) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (8) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

②

REVISION

2

NAS21323

SHEET 2

