

FED. SUPPLY CLASS

5340

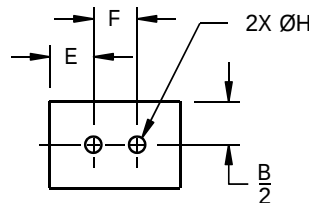

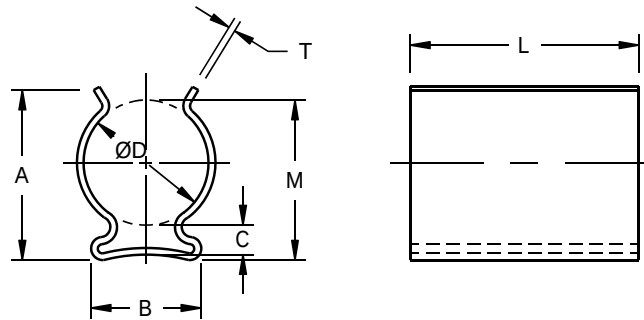


FIGURE 1 - ONE MOUNTING HOLE

FIGURE 2 - TWO MOUNTING HOLES

FIGURE 3 - THREE MOUNTING HOLES

TABLE I - DIMENSIONS

PART NUMBER	PART NUMBER	$\varnothing D$ $\pm .010$ /3/	L LENGTH $\pm .010$	$\varnothing H$ MTG HOLE $\pm .003$	T MATERIAL THICKNESS $\pm .003$	A $\pm .020$	B $\pm .020$	C MIN
SPRING STEEL	COPPER BERYLLIUM	FIGURE 1						
CADMIUM PLATED	CADMIUM PLATED							
M24066/2-301	M24066/2-201	.175	.250	.071	.010	.250	.200	.035
M24066/2-302	M24066/2-202	.195	.250	.071	.012	.270	.220	.035
M24066/2-303	M24066/2-203	.195	.312	.093	.012	.270	.220	.040
M24066/2-304	M24066/2-204	.235	.312	.071	.012	.320	.260	.040
M24066/2-305	M24066/2-205	.260	.250	.093	.012	.340	.280	.035
M24066/2-306	M24066/2-206	.260	.500	.093	.012	.340	.280	.035
M24066/2-307	M24066/2-207	.312	.312	.093	.012	.380	.340	.040
M24066/2-308	M24066/2-208	.375	.375	.093	.012	.450	.400	.040
M24066/2-309	M24066/2-209	.400	.500	.103	.020	.500	.440	.045
M24066/2-310	M24066/2-210	.500	.375	.093	.016	.600	.530	.050
M24066/2-311	M24066/2-211	.562	.375	.093	.022	.690	.600	.080
M24066/2-312	M24066/2-212	.875	1.000	.144	.028	1.100	.930	.105

① COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MIL-C-24066/2, REVISION E. PART NUMBERS REMAIN M24066/2.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 1
PROCUREMENT SPECIFICATION NAS1463	TITLE CLIP, SOLID, SPRING TENSION	CLASSIFICATION PART STANDARD NAS24066/2

SHEET 1 OF 6

TABLE I – DIMENSIONS (CONTINUED)

PART NUMBER	PART NUMBER	ØD ±.010 /3/	L LENGTH ±.010	ØH MTG HOLE ±.003	T MATERIAL THICKNESS ±.003	A ±.020	B ±.020	C MIN
SPRING STEEL	COPPER BERYLLIUM	FIGURE 2						
CADMIUM PLATED	CADMIUM PLATED							
M24066/2-313	M24066/2-213	.175	.312	.071	.010	.250	.200	.035
M24066/2-314	M24066/2-214	.175	.625	.071	.010	.250	.200	.035
M24066/2-315	M24066/2-215	.195	.625	.071	.012	.270	.220	.035
M24066/2-316	M24066/2-216	.235	.625	.093	.012	.320	.260	.040
M24066/2-317	M24066/2-217	.260	.500	.093	.012	.340	.280	.035
M24066/2-318	M24066/2-218	.312	.562	.093	.016	.380	.340	.040
M24066/2-319	M24066/2-219	.312	.687	.093	.012	.380	.340	.040
M24066/2-320	M24066/2-220	.312	.750	.093	.016	.380	.340	.040
M24066/2-321	M24066/2-221	.375	.750	.103	.018	.460	.410	.035
M24066/2-322	M24066/2-222	.391	.625	.093	.018	.480	.430	.050
M24066/2-323	M24066/2-223	.400	.750	.103	.018	.500	.440	.050
M24066/2-324	M24066/2-224	.500	.750	.128	.016	.600	.530	.050
M24066/2-325	M24066/2-225	.562	.687	.128	.022	.690	.600	.080
M24066/2-326	M24066/2-226	.562	1.000	.093	.022	.690	.600	.080
M24066/2-327	M24066/2-227	.670	.500	.128	.016	.800	.700	.090
M24066/2-328	M24066/2-228	.670	.750	.128	.016	.800	.700	.090
M24066/2-329	M24066/2-229	.670	.937	.128	.016	.800	.700	.090
M24066/2-330	M24066/2-230	.750	.750	.128	.020	.900	.790	.110
M24066/2-331	M24066/2-231	.750	1.000	.156	.029	.920	.810	.109
M24066/2-332	M24066/2-232	.750	1.250	.144	.029	.920	.810	.100
M24066/2-333	M24066/2-233	.875	.750	.128	.028	1.100	.930	.110
M24066/2-334	M24066/2-234	.875	1.125	.144	.028	1.100	.930	.110
M24066/2-335	M24066/2-235	.875	2.000	.144	.028	1.100	.930	.110
M24066/2-336	M24066/2-236	1.000	1.000	.144	.024	1.210	1.050	.130
		FIGURE 3						
M24066/2-337	M24066/2-237	.195	1.125	.071	.010	.270	.210	.035
M24066/2-338	M24066/2-238	.375	1.125	.103	.018	.460	.410	.035
M24066/2-339	M24066/2-239	.400	1.125	.103	.020	.500	.440	.035
M24066/2-340	M24066/2-240	.500	1.625	.128	.016	.600	.530	.050
M24066/2-341	M24066/2-241	.562	1.625	.128	.022	.690	.600	.080
M24066/2-342	M24066/2-242	.670	1.375	.128	.024	.820	.720	.090
M24066/2-343	M24066/2-243	.750	2.000	.144	.029	.920	.810	.100
M24066/2-344	M24066/2-244	1.000	1.875	.144	.032	1.210	1.050	.120
M24066/2-345	M24066/2-245	1.125	1.375	.162	.032	1.340	1.190	.125
M24066/2-346	M24066/2-246	1.250	2.000	.162	.032	1.350	1.310	.100
		FIGURE 2						
M24066/2-347	M24066/2-247	.351	.625	.093	.012	.440	.330	.035

① COMPLETELY REVISED

REVISION

1

NASM24066-2
SHEET 2



Document Sharing Hub