

FED. SUPPLY CLASS

5340

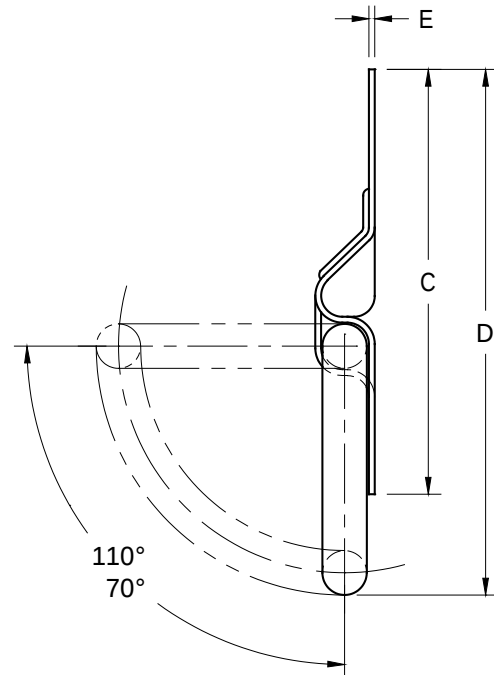
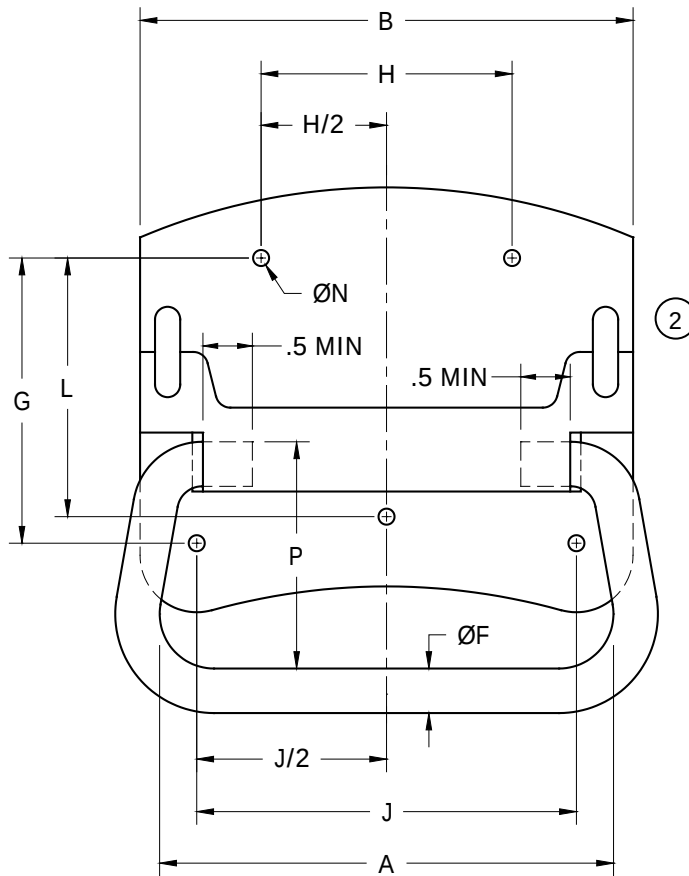


TABLE I – DIMENSIONS

DASH NO.	A ±.06	B ±.06	C ±.06	D ±.06	E ±.01	ØF ±.03	G ±.03	H ±.03	J ±.03	L ±.03	ØN ±.005	P MIN
1	4.5	4.88	4.19	5.19	.08	.44	2.81	2.5	3.75	2.53	.155	2.25

MATERIAL:

MOUNTING PLATE, COLD ROLLED, TEMPER NO. 3 IN ACCORDANCE WITH QQ-S-698.
BAIL, STEEL ANNEALED AND COLD FINISHED IN ACCORDANCE WITH QQ-S-634 ASTM A108.

FINISH:

- ② CADMIUM PLATE, TYPE II, CLASS 3 IN ACCORDANCE WITH AMS-QQ-P-416, OR
ZINC PLATE, TYPE II, SC 1 IN ACCORDANCE ASTM B633. /9/


THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS35793, REVISION B. PART NUMBERS REMAIN MS35793.

THIRD ANGLE PROJECTION	
PROCUREMENT SPECIFICATION	NONE

CUSTODIAN	NATIONAL AEROSPACE STANDARDS COMMITTEE
TITLE	HANDLE, BAIL, CHEST, SURFACE MOUNTING, PLAIN HOLES

REVISION	2
CLASSIFICATION PART STANDARD	MS35793

CODE:



EXAMPLE OF PART NUMBER:


 MS35793-1 = HANDLE WIDTH 4.5, WITH MOUNTING PLATE AND BAIL OF STEEL, CAD OR ZINC PLATED.

NOTES:

- (1) THE DISTANCE FROM THE CENTER OF THE MOUNTING HOLES TO THE EDGE OF THE MOUNTING PLATE SHALL BE .375 MINIMUM.
- 
 (2) PART PROFILE MAY VARY AS LONG AS ALL REQUIREMENTS SPECIFIED ON THIS STANDARD ARE MET.
- 
 (3) DASH NUMBER "21" AND "22" ARE CANCELED AFTER 27 MAR 1970 AND SUPERSEDED BY DASH NUMBER "1". FOR DESCRIPTION OF STATUS NOTES SEE NAS380.
- (4) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (5) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (6) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (7) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (8) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- 
 /9/ THE BAIL OR MOUNTING PLATE CAN BE EITHER CADMIUM PLATED OR ZINC PLATED, AND MAY NOT HAVE TO MATCH EITHER COMPONENT.

REVISION

2

NASM35793

SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF

ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY OF PATENT OR TRADEMARKS RIGHTS.

No reproduction or networking permitted without license from IHS

Full document details: AIA NASM35793 2017