
**Corrosion of metals and alloys — Test
method for corrosion of materials
by electrochemical impedance
measurements**

*Corrosion des métaux et alliages — Méthode d'essai pour la corrosion
des matériaux par des mesures électrochimiques d'impédance*



Reference number
ISO/TR 16208:2014(E)

AVA Documents
Document Sharing Hub
© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principles	3
4.1 Simple corroding system.....	3
4.2 Presentation of impedance by a complex number.....	5
4.3 Impedance spectra of circuit elements.....	6
4.4 Presentation of a simple corroding system.....	7
5 Apparatus	9
5.1 General.....	9
5.2 Test cell.....	10
5.3 Electrode holder.....	10
5.4 Electrode material.....	10
5.5 Reference electrode.....	11
5.6 Electrolyte.....	11
6 Specimen preparation	11
7 Solution preparation	11
8 Dummy cell	11
9 Procedure	11
10 Data analysis	12
11 Test report	14
Annex A (informative) Dummy cell	15
Annex B (informative) Data analysis	17
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 156, *Corrosion of metals and alloys*.

Corrosion of metals and alloys — Test method for corrosion of materials by electrochemical impedance measurements

1 Scope

This Technical Report describes basic principles of electrochemical impedance spectroscopy (EIS), specially focusing on the corrosion of metallic materials. It also deals with how to use electrochemical apparatus, set up and connect electrical instruments, present measured data, and analyse results. However, a more detailed description of this methodology can be found in ISO 16773-1 and ISO 16773-2.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 16773-1, *Paints and varnishes — Electrochemical impedance spectroscopy (EIS) on high-impedance coated specimens — Part 1: Terms and definitions*

ISO 16773-2, *Paints and varnishes — Electrochemical impedance spectroscopy (EIS) on high-impedance coated specimens — Part 2: Collection of data*

ISO 16773-3, *Paints and varnishes — Electrochemical impedance spectroscopy (EIS) on high-impedance coated specimens — Part 3: Processing and analysis of data from dummy cells*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16773-1 and the following apply.

3.1

bode plot

phase angle and the logarithm of the impedance magnitude $|Z|$ plotted versus the logarithm of the applied frequency

3.2

constant phase element

CPE

equivalent circuit component that models the behaviour of an imperfect capacitor representing a constant phase shift through the whole frequency range

Note 1 to entry: A capacitor has a phase shift of -90° ; for a CPE, the absolute value is smaller.

3.3

counter electrode

inert electrode in the electrochemical cell through which the current passes from or to the working electrode

Note 1 to entry: The counter electrode is also called auxiliary electrode.

3.4

dummy cell

printed circuit board with mounted electrical components according to the equivalent circuit with connection points to the measuring instrument

3.5

double-layer capacitance

C_{dl}
capacitance values in the equivalent circuit representing the metal-electrolyte interface characteristics

3.6

impedance

frequency-dependent, complex-valued proportionality factor, $\Delta E/\Delta I$, between the applied potential (or current) and the response current (or potential) in an electrochemical cell

Note 1 to entry: This factor becomes the impedance when the perturbation and response are related linearly (the factor value is independent of the perturbation magnitude) and the response is caused only by the perturbation. The value can be related to the corrosion rate when the measurement is made at the corrosion potential.

3.7

magnitude of the impedance

$|Z|$
magnitude modulus
square root of the sum of squares of the real and imaginary component of impedance

Note 1 to entry: This is given by the formula below.

$$|Z| = \left[(Z')^2 + (Z'')^2 \right]^{\frac{1}{2}}$$

where

Z is the complex impedance;

Z' is the real part of impedance;

Z'' is the imaginary part of impedance.

3.8

Nyquist plot

real component of impedance Z' plotted versus the negative of the imaginary component of impedance Z'' in rectangular coordinate values

3.9

phase angle

phase difference between the periodically recurring voltage and the current of the same frequency, expressed in angular measure

3.10

polarization resistance

R_p
slope (d_e/d_i) at the corrosion potential of a potential (e) versus current density (i) curve

Note 1 to entry: For a simple corroding system, charge transfer resistance, R_{ct} , is used.

3.11

potentiostat

electronic instrument for automatically maintaining the working electrode in an electrolyte at a controlled potential with respect to a reference electrode, and for measuring the resulting current between the working and counter electrodes

3.12**reference electrode**

electrode which allows the measurement of an electrode potential

Note 1 to entry: This electrode has to present a thermodynamically stable potential versus the standard hydrogen electrode.

3.13**solution resistance**
 R_s

resistance of the solution between the working electrode and the tip of Luggin capillary connected to the reference electrode

Note 1 to entry: This term is not defined in ISO 16773-1.

3.14**working electrode**

test or specimen electrode in an electrochemical cell

Note 1 to entry: This definition is different from the definition in ISO 16773-1.

3.15**Kramers-Kronig relation**

mathematical relation connecting the real and imaginary parts of any complex function which is analytic in the upper half-plane

Note 1 to entry: These relations are often used to relate the real and imaginary parts of response functions in physical systems because causality implies that the analyticity condition is satisfied, and conversely, analyticity implies causality of the corresponding physical system.

4 Principles**4.1 Simple corroding system**

Simple corrosion systems, which are under charge transfer control resulting in uniform corrosion on homogeneous surface, can be described by a simple equivalent circuit shown in [Figure 1](#). The use of electrochemical impedance spectroscopy (EIS) on corroding metals requires that the measured system do not react in such a way that the measured system change during the measurement time, steady-state should be maintained. A metal immersed in the solution may corrode by anodic and cathodic reactions at the metal/solution interface, as shown in [Figure 1](#).

A simple corroding system in an electrolyte is represented by an anodic and cathodic reaction:

Anode: $\text{Me}_1 \rightarrow \text{Me}_1^{n+} + n\text{e}^-$

Cathode: $\text{Me}_2^{n+} + n\text{e}^- \rightarrow \text{Me}_2$

where

n is the number of electrons e^- ;

Me is the metal.

Metal 1 has less nobility than metal 2.

The equivalent circuit represents the metal/solution interface of the metal surface which consists of a polarization resistance, R_p , also commonly noted charge transfer resistance, R_{ct} , in parallel with an electric double-layer capacitance, C_{dl} , which is in series with a solution resistance, R_s .

A metal sample in immersion develops an electric double layer at the interface. The double layer is represented by a capacitance in EIS. It is not a true capacitive value measured by EIS and the double layer is, therefore, represented by a constant phase element (CPE) to compensate the deviation from the true capacitive value. The elements CPE and R_p are not always dependent on corrosion resistance but can reflect the overall electrical resistance and dielectric properties of passive film oxides. For example, a passive film growth depends on the transport of cations and anions or their vacancies across the oxide film. If defects such as pores, channels, or cracks are present in the passive film, the electrolyte will penetrate the film and impair its resistance. In addition, a surface oxide film might exhibit capacitive behaviour due to a dielectric nature of the oxide.

The CPE is a component of the equivalent circuit for modelling the behaviour of an electrical double layer, an imperfect capacitor. The impedance of a CPE is given by $1/Z_{CPE} = Q^\circ(j\omega)^n$. The Q° is the constant corresponding to the electric double-layer capacitance qualitatively. The factor n ranges from 0 to 1 as follows:

- $n = 1$ represents an ideal capacitor;
- $n = 0$ represents a pure resistor.

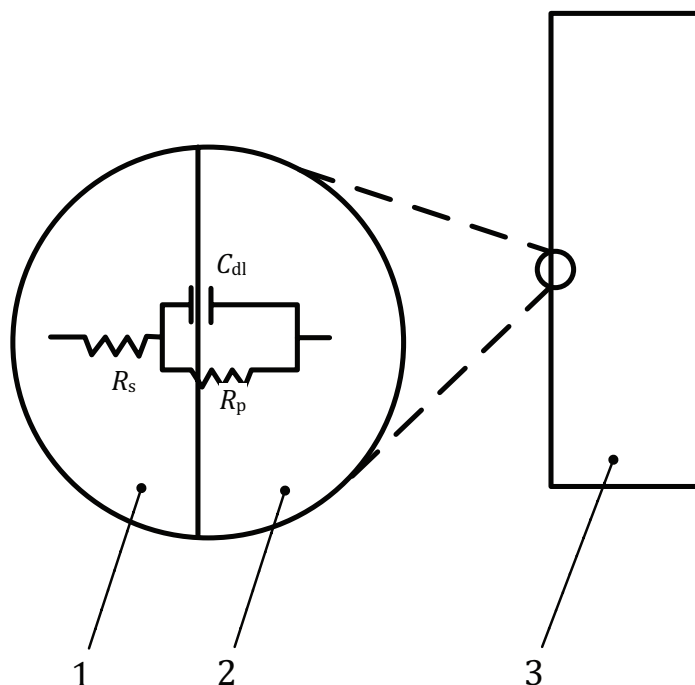


Figure 1 — Schematic representation of a metal in solution and the equivalent circuit representing the metal/solution interface

Key

R_s solutions resistance	1 solution
C_{dl} double layer capacitance	2 metal
R_p polarization resistance	3 corroding metal

For a simple corroding metal, the value of C_{dl} is generally proportional to the actual surface area of the working electrode. When the anodic and cathodic reactions are controlled by the charge transfer step

around the corrosion potential, the current flowing through the working electrode, I_w , is represented by Formula (1).

$$I_w = I_{\text{cor}} \left\{ \exp \left[\frac{2,303(E - E_{\text{cor}})}{\beta_a} \right] - \exp \left[\frac{-2,303(E - E_{\text{cor}})}{\beta_c} \right] \right\} \quad (1)$$

where

I_{cor} is the corrosion current;

β_a and β_c are Tafel constants (V/decade) in anodic and cathodic regions, respectively.

The R_p and I_{cor} have the following relation:

$$R_p = \frac{K}{I_{\text{cor}}} \quad (2)$$

where

$$K = \frac{\beta_a \beta_c}{2,303(\beta_a + \beta_c)} \quad (3)$$

The value of K is dependent upon the type of specimen material and the environment, and the I_{cor} can be obtained from R_p theoretically.

When a semicircle of the impedance is depressed indicating an untrue capacitance in the Nyquist plot, the constant phase element (CPE) may be incorporated in the equivalent circuit instead of C_{dl} . The outline of CPE is revealed in [Annex B](#). The theoretical relationship in Formula (3) might not hold for the corrosion system with a CPE because other electrochemical reactions than simple metallic corrosion might be involved in the system. It is recommended that the correlation between R_p values and I_{cor} values from weight-loss measurements be used to determine K values.

4.2 Presentation of impedance by a complex number

The impedance Z is represented by the complex number with real part Z' and imaginary part Z'' .

$$Z = Z' - j Z'' \quad (4)$$

The relation of Z' and Z'' on the complex plane is depicted in [Figure 2](#). The magnitude impedance, $|Z|$, and phase shift φ (in degrees) or θ (in radians) of Z are related by

$$|Z| = \sqrt{(Z')^2 + (Z'')^2} \quad (5)$$

$$\varphi = \arctan \left(\frac{-Z''}{Z'} \right) \quad (6)$$

$$\theta = \frac{180}{\pi} \varphi \quad (7)$$

The phase angle of vector Z is presented in φ (degrees) on the complex plane, as in [Figure 2](#).