



JAPANESE
INDUSTRIAL
STANDARD

Translated and Published by
Japanese Standards Association

JIS X 6174 : 2004
(ISO/IEC 16382 : 2000)
(JEITA/JSA)

**Information technology — Data
interchange on 12.7 mm 208-track
magnetic tape cartridges — DLT6
format**

ICS 35.220.23

Reference number : JIS X 6174 : 2004 (E)

PROTECTED BY COPYRIGHT

Foreword

This translation has been made based on the original Japanese Industrial Standard established by the Minister of Economy, Trade and Industry through deliberations at the Japanese Industrial Standards Committee according to the proposal of establishing a Japanese Industrial Standard from Japan Electronics and Information Technology Industries Association (JEITA)/Japanese Standards Association (JSA) with the draft of Industrial Standard based on the provision of Article 12 Clause 1 of the Industrial Standardization Law.

This Standard has been made based on **ISO/IEC 16382:2000** *Information technology — Data interchange on 12.7 mm 208-track magnetic tape cartridges — DLT6 format* for the purpose of making it easier to compare this Standard with International Standard; to prepare Japanese Industrial Standard conforming with International Standard; and to propose a draft of an International Standard which is based on Japanese Industrial Standard.

Attention is drawn to the possibility that some parts of this Standard may conflict with a patent right, application for a patent after opening to the public, utility model right or application for registration of utility model after opening to the public which have technical properties. The relevant Minister and the Japanese Industrial Standards Committee are not responsible for identifying the patent right, application for a patent after opening to the public, utility model right or application for registration of utility model after opening to the public which have the said technical properties.

Date of Establishment: 2004-02-20

Date of Public Notice in Official Gazette: 2004-02-20

Investigated by: Japanese Industrial Standards Committee
Standards Board
Technical Committee on Information
Technology

JIS X 6174 :2004, First English edition published in 2005-04

Translated and published by: Japanese Standards Association
4-1-24, Akasaka, Minato-ku, Tokyo, 107-8440 JAPAN

In the event of any doubts arising as to the contents,
the original JIS is to be the final authority.

© JSA 2005

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

Printed in Japan

PROTECTED BY COPYRIGHT

Contents

	Page
Introduction	1
1 Scope	1
2 Conformance	1
2.1 Magnetic tape cartridges	1
2.2 Generating systems	1
2.3 Receiving systems	2
3 Normative references	2
4 Terms and definitions	2
4.1 average signal amplitude	2
4.2 azimuth	2
4.3 back surface	2
4.4 beginning-of-tape marker (BOT)	2
4.5 block	2
4.6 byte	2
4.7 cartridge	3
4.8 cyclic redundancy check (CRC) character	3
4.9 early warning (EW)	3
4.10 error-detecting code (EDC)	3
4.11 end-of-tape marker (EOT)	3
4.12 entity	3
4.13 error-correcting code (ECC)	3
4.14 envelope	3
4.15 envelope size	3
4.16 flux transition position	3
4.17 flux transition spacing	3
4.18 group record	3
4.19 logical track	3
4.20 magnetic tape	3
4.21 master standard reference tape	3
4.22 object	3
4.23 page	3
4.24 physical recording density	3
4.25 physical track	4
4.26 record	4

4.27	reference edge	4
4.28	reference field	4
4.29	secondary standard reference tape	4
4.30	standard reference amplitude (SRA)	4
4.31	standard reference current	4
4.32	test recording current	4
4.33	typical field	4
5	Conventions and notations	4
5.1	Representation of numbers	4
5.2	Dimensions	5
5.3	Names	5
5.4	Acronyms	5
6	Environment and safety	5
6.1	Cartridge and tape testing environment	5
6.2	Cartridge operating environment	5
6.3	Cartridge storage environment	6
6.4	Safety	6
7	Mechanical and electrical requirements	6
7.1	Material	6
7.2	Tape length	6
7.3	Width	6
7.4	Total thickness	6
7.5	Discontinuity	6
7.6	Longitudinal curvature	7
7.7	Out-of-plane distortions	7
7.8	Cupping	7
7.9	Roughness of the coating surfaces	7
7.10	Coating adhesion	7
7.11	Layer-to-layer adhesion	8
7.12	Modulus of elasticity	9
7.13	Flexural rigidity	10
7.14	Tensile yield force	10
7.15	Electrical resistance	10
7.16	Inhibitor tape	11
7.17	Abrasivity	11
7.18	Light transmittance of the tape and the leader	12
7.19	Coefficient of dynamic friction	12

8	Magnetic recording characteristics	13
8.1	Typical field	14
8.2	Signal amplitude	14
8.3	Resolution	14
8.4	Overwrite	14
8.5	Peak shift	14
9	Tape quality	15
9.1	Missing pulses	15
9.2	Missing pulse zone	15
9.3	Tape durability	15
10	General	15
10.1	Bottom side and right side (figures 8 and 9)	16
10.2	Back side and left side (figures 10 and 11)	17
10.3	Tape reel (figures 8, 12 and 13)	18
10.4	Tape leader (figures 14, 15 and 16)	18
10.5	Front side (figure 17)	20
10.6	Operation of the cartridge (figures 18 and 19)	20
10.7	Tape winding	21
10.8	Moment of inertia	21
10.9	Material	21
11	Method of recording	28
11.1	Physical recording density	28
11.2	Channel bit cell length	29
11.3	Flux transition spacing	29
11.4	Read signal amplitude	29
11.5	Azimuth	29
11.6	Channel skew	29
12	Tape format	29
12.1	Reference Edge	30
12.2	Direction of recording	30
12.3	Tape layout	30
12.4	Calibration and directory area	30
12.5	Data area	32
13	Data format	36
13.1	Data bytes	36
13.2	Data blocks	36
13.3	Types of blocks	36

13.4	Entities	36
13.5	Envelopes	36
13.6	Block format	37
14	Use of blocks	42
14.1	Data blocks	42
14.2	Filler blocks	42
14.3	End of track blocks (EOTR)	42
14.4	End of data blocks (EOD)	42
14.5	ECC blocks	42
15	Format of entities	43
16	Format of envelopes	43
17	Error handling	43
Annex A (normative)	Measurement of light transmittance	44
Annex B (normative)	Generation of the data block CRCs	47
Annex C (normative)	ECC generation	48
Annex D (normative)	Generation of page CRCs	51
Annex E (normative)	Format of MAP entries	52
Annex F (normative)	Format of control field 1	53
Annex G (normative)	Format of control field 2	54
Annex H (informative)	Recommendations for transportation	55
Annex J (informative)	Inhibitor tape	56
Annex K (informative)	Recommendations on tape durability	57
Annex L (informative)	Handling guidelines	58

Information technology — Data interchange on 12.7 mm 208-track magnetic tape cartridges — DLT6 format

Introduction This Japanese Industrial Standard has been prepared based on the first edition of **ISO/IEC 16382** *Information technology — Data interchange on 12.7 mm 208-track magnetic tape cartridges — DLT6 format* published in 2000 without modifying the technical contents.

Portions underlined with dots are the matters not stated in the original International Standard.

1 Scope This Standard specifies the physical and magnetic characteristics of a 12.7 mm wide, 208-track magnetic tape cartridge, to enable physical interchangeability of such cartridges between drives. It also specifies the quality of the recorded signals, a format - called Digital Linear Tape 6 (DLT 6) - and a recording method, thereby allowing data interchange between drives.

Together with a labelling standard, for instance, **JIS X 0601** for magnetic tape labelling, it allows full data interchange by means of such magnetic tape cartridges.

NOTE : The International Standard corresponding to this Standard is as follows.

In addition, symbols which denote the degree of correspondence in the contents between the relevant International Standard and **JIS** are **IDT** (identical), **MOD** (modified), and **NEQ** (not equivalent) according to **ISO/IEC Guide 21**.

ISO/IEC 16382 : 2000 *Information technology — Data interchange on 12.7 mm 208-track magnetic tape cartridges — DLT 6 format* (IDT)

2 Conformance

2.1 Magnetic tape cartridges A magnetic tape cartridge shall be in conformance with this Standard if it satisfies all mandatory requirements of this Standard.

The tape requirements shall be satisfied throughout the extent of the tape.

2.2 Generating systems A system generating a magnetic tape cartridge for interchange shall be in conformance with this Standard if all the recordings that it makes on a tape according to **2.1** meet the mandatory requirements of this Standard.

In addition, a claim of conformance shall state

- whether or not one, or more registered algorithm(s) are implemented within the system, and are able to compress data received from the host prior to collecting the data into blocks, and
- the registered identification number(s) of the implemented compression algorithm(s).

2.3 Receiving systems A system receiving a magnetic tape cartridge for interchange shall be in conformance with this Standard if it is able to handle any recording made on a tape according to 2.1.

In addition, it shall state

- whether or not one, or more de-compression algorithm(s) are implemented within the system, and are able to be applied to de-compress data prior to making such data available to the host,
- the registered identification number(s) of the implemented compression algorithm(s).

3 Normative references The following standards contain provisions which, through reference in this Standard, constitute provisions of this Standard. If the indication of the year of coming into effect or the year of publication is given to these referred standards, only the edition of the indicated year constitutes the provision of this Standard but the revision and amendment made thereafter do not apply.

JIS X 0601:2000 *Information processing — File structure and labelling of magnetic tapes for information interchange*

NOTE : ISO 1001:1986 *Information processing — File structure and labelling of magnetic tapes for information interchange* is equivalent to the said standard.

ISO 1302:1992 *Technical drawings — Method of indicating surface texture*

ISO/IEC 11576:1994 *Information technology — Procedure for the registration of algorithms for the lossless compression of data*

4 Terms and definitions For the purposes of this Standard, the following terms and definitions apply.

4.1 average signal amplitude the average peak-to-peak value of the output signal from the read head at the physical recording density of 2 578 ftpmm measured over a minimum length of track of 25.4 mm, exclusive of missing pulses

4.2 azimuth the angular deviation, in degrees of arc, of the mean flux transition line of the recording made on a track from a line normal to the reference edge

4.3 back surface the surface of the tape opposite the magnetic coating which is used to record data

4.4 beginning-of-tape marker (BOT) a hole punched on the centreline of the tape towards the end nearest to the leader

4.5 block a set of contiguous bytes recorded on a physical track and considered as a unit

4.6 byte an ordered set of bits acted upon as a unit

NOTE : In this Standard, all bytes are 8-bit bytes.

4.7 cartridge a case containing a single supply reel of 12.7 mm wide magnetic tape with a leader attached at the outer end

4.8 cyclic redundancy check (CRC) character a 64-bit character, generated by a mathematical computation, used for error detection

4.9 early warning (EW) a signal generated by the drive indicating the approaching end of the recording area

4.10 error-detecting code (EDC) a mathematical computation yielding check bytes used for error detection

4.11 end-of-tape marker (EOT) a hole punched on the centreline of the tape towards the end farthest from the leader

4.12 entity a group of twenty blocks treated as a logical unit and recorded on a logical track, except filler blocks, if any

4.13 error-correcting code (ECC) a mathematical computation yielding check bytes used for the correction of errors detected by the CRC and the EDC

4.14 envelope a group of entities

4.15 envelope size the number of entities in an envelope

4.16 flux transition position the point which exhibits the maximum free-space flux density normal to the tape surface

4.17 flux transition spacing the distance on the magnetic tape between successive flux transitions

4.18 group record a record consisting of a series of records of equal size

4.19 logical track a group of four physical tracks that are written or read simultaneously

4.20 magnetic tape a tape that accepts and retains magnetic signals intended for input, output, and storage purposes on computers and associated equipment

4.21 master standard reference tape a tape selected as the standard for reference field, signal amplitude, resolution, peakshift, and overwrite characteristics

Information : The master standard reference tape has been established by the Quantum Corporation.

4.22 object a record or a page of type tape mark

4.23 page a logical division of a block

4.24 physical recording density the number of recorded flux transitions per unit length of track, expressed in flux transitions per millimetre (ftpmm)

4.25 physical track a longitudinal area on the tape along which a series of magnetic signals can be recorded

4.26 record a collection of user bytes, the number of which is determined by the host

4.27 reference edge the bottom edge of the tape when viewing the magnetic coating of the tape with the BOT to the left and the EOT to the right of the observer

4.28 reference field the typical field of the master standard reference tape

4.29 secondary standard reference tape a tape the characteristics of which are known and stated in relation to those of the master standard reference tape

NOTE : Secondary standard reference tapes can be ordered under reference "SSRT/DLT4" from Quantum Corporation, 333 South Street, Shrewsbury, Mass. 01545-4195, USA. It is intended that these be used for calibrating tertiary reference tapes for routine calibration.

In principle, these secondary standard reference tapes will be available for a period of 10 years from the publication of the first version of this Standard. However, by agreement between ECMA and Quantum Corporation, this period may be changed to take into account the demand for such secondary standard reference tapes.

4.30 standard reference amplitude (SRA) the average signal amplitude from the master standard reference tape when it is recorded with the test recording current at 2 578 ftpmm

4.31 standard reference current the current that produces the reference field

4.32 test recording current the current that is 1.1 times the standard reference current

4.33 typical field in the plot of the average signal amplitude against the recording field at the physical recording density of 2 578 ftpmm, the minimum field that causes an average signal amplitude equal to 95 % of the maximum average signal amplitude

5 Conventions and notations

5.1 Representation of numbers The following conventions and notations apply in this Standard, unless otherwise stated.

- A measured value is rounded off to the least significant digit of the corresponding specified value. It implies that a specified value of 1.26 with a positive tolerance +0.01, and a negative tolerance –0.02 allows a range of measured values from 1.235 to 1.275.
- In each block and in each field the bytes shall be arranged with byte 1, the least significant, first. Within each byte the bits shall be arranged with bit 1, the least significant, first and bit 8, the most significant bit, last. This order applies to the data, and to the input and output of the error-detecting and error-correcting codes, and to the cyclic redundancy characters.
- Letters and digits in parentheses represent numbers in hexadecimal notation.
- The setting of bits is denoted by ZERO or ONE.

- Numbers in binary notation and bit patterns are represented by strings of 0 and 1 shown with the most significant bit to the left.

5.2 Dimensions The dimensions in figures 1 to 4 are nominal dimensions. Unless otherwise stated, all dimensions in figures 8 to 23 are in millimetres with a tolerance of ± 50 mm.

5.3 Names The names of basic elements, e.g. specific fields, are written with a capital initial letter in the original International Standard. However, in this **JIS** standard, the said description method is not adopted.

5.4 Acronyms

BOT	beginning of tape
CF1	control field 1
CF2	control field 2
CRC	cyclic redundancy check (character)
CT1	calibration track 1
CT2	calibration track 2
ECC	error-correcting code
EDC	error-detecting code
EOD	end of data
EOT	end of tape
EOTR	end of track
EW	early warning
RLL	run length limited
SRA	standard reference amplitude

6 Environment and safety Unless otherwise stated, the conditions specified below refer to the ambient conditions in the test or computer room and not to those within the tape drive (see annex L).

6.1 Cartridge and tape testing environment Unless otherwise stated, tests and measurements made on the cartridge and tape to check the requirements of this Standard shall be carried out under the following conditions:

- temperature: $23\text{ }^{\circ}\text{C} \pm 2\text{ }^{\circ}\text{C}$
- relative humidity: 40 % to 60 %
- conditioning before testing: 24 h min.

6.2 Cartridge operating environment Cartridges used for data interchange shall be capable of operating under the following conditions:

- temperature: $10\text{ }^{\circ}\text{C}$ to $40\text{ }^{\circ}\text{C}$
- relative humidity: 20 % to 80 %
- wet bulb temperature: $25\text{ }^{\circ}\text{C}$ max.

If during storage and/or transportation a cartridge has been exposed to conditions outside the above values, it shall be conditioned before use by exposure to the operating environment for a time equal to, or greater than, the time away from the operating environment up to a maximum of 24 h. There shall be no deposit of moisture on or in the cartridge.

Information : Localized tape temperatures in excess of 49 °C may cause tape damage.

6.3 Cartridge storage environment Cartridges shall be stored under the following conditions:

- temperature: 16 °C to 32 °C
- relative humidity: 20 % to 80 %

The stray magnetic field at any point on the tape shall not exceed 4 000 A/m. There shall be no deposit of moisture on or in the cartridge.

6.4 Safety

6.4.1 Safeness The cartridge and its components shall not constitute any safety or health hazard when used in the intended manner, or through any foreseeable misuse in an information processing system.

6.4.2 Flammability The cartridge and its components shall be made from materials which, if ignited from a match flame, and when so ignited do not continue to burn in a still carbon dioxide atmosphere.

6.4.3 Transportation This Standard does not specify parameters for the environment in which cartridges should be transported. Annex H gives some recommendations for transportation.

7 Mechanical and electrical requirements

7.1 Material The tape shall consist of a base material (oriented polyethylene terephthalate film or its equivalent) coated on one surface with a strong yet flexible layer of ferromagnetic material dispersed in a suitable binder. The back surface of the tape shall be coated with a non-ferromagnetic conductive coating.

7.2 Tape length The length of the tape from the leader splice to the hub shall be 557 m $\pm$ 5 m.

7.3 Width The width of the tape shall be 12.649 mm $\pm$ 0.010 mm.

The width shall be measured across the tape from edge to edge when the tape is under a tension of less than 0.28 N.

7.4 Total thickness The total thickness of the magnetic tape at any point shall be between 8.3 μ m and 9.3 μ m.

7.5 Discontinuity There shall be no discontinuities in the tape between the BOT and EOT such as those produced by tape splicing or perforations.

7.6 Longitudinal curvature The longitudinal curvature is measured as the departure of the reference edge of the tape from a straight line along the longitudinal dimension of the tape in the plane of the tape surface.

7.6.1 Requirement Any deviation of the reference edge from a straight line shall be continuous and shall not exceed 0.076 mm within any 229 mm length of tape.

7.6.2 Procedure Measure at a tension of $1.39\text{ N} \pm 0.28\text{ N}$ in a test fixture equipped with two guides spaced at 229 mm. The two guides shall be spring-loaded to position the reference edge of the tape against two edge control surfaces. Measure the maximum deviation of the reference edge of the tape from the line drawn between the two control surfaces.

7.7 Out-of-plane distortions All visual evidence of out-of-plane distortion shall be removed when the tape is subjected to a uniform tension of 0.6 N. Out-of-plane distortions are local deformations which cause portions of the tape to deviate from the plane of the surface of the tape. Out-of-plane distortions are most readily observed when the tape is lying on a flat surface under no tension.

7.8 Cupping The departure across the width of the tape from a flat surface shall not exceed 2.54 mm.

Cut a $1.0\text{ m} \pm 0.1\text{ m}$ length of tape. Condition it for a minimum of 3 h in the test environment by hanging it so that both surfaces are freely exposed to the test environment. From the centre portion of the conditioned tape cut a test piece of approximately 25 mm length. Stand the test piece on its end in a cylinder which is at least 25 mm high with an inside diameter of $13.0\text{ mm} \pm 0.2\text{ mm}$. With the cylinder standing on an optical comparator measure the cupping by aligning the edges of the test piece to the reticle and determining the distance from the aligned edges to the corresponding surface of the test piece at its centre.

7.9 Roughness of the coating surfaces

7.9.1 Roughness of the back coating surface The back coating surface shall have an arithmetic average roughness R_a between $0.003\text{ }\mu\text{m}$ and $0.018\text{ }\mu\text{m}$ (ISO 1302:N2). This measurement shall be made using a contacting stylus of radius $12.5\text{ }\mu\text{m}$ with a 20 mg load, and a $254\text{ }\mu\text{m}$ cut-off range.

7.9.2 Roughness of the magnetic coating surface The magnetic coating surface shall have an arithmetic average roughness R_a between $0.003\text{ }\mu\text{m}$ and $0.008\text{ }\mu\text{m}$ (ISO 1302: N3). For this measurement, the contacting stylus radius shall be $12.5\text{ }\mu\text{m}$ with a 20 mg load, and a $254\text{ }\mu\text{m}$ cut-off range.

7.10 Coating adhesion The force required to peel any part of the coating from the tape base material shall not be less than 0.4 N.

Procedure

- Take a test piece of the tape approximately 380 mm long and scribe a line through the recording coating across the width of the tape 125 mm from one end.
- Using a double-sided pressure sensitive tape, attach the full width of the test piece to a smooth metal plate, with the magnetic coating (recording surface) facing the plate, as shown in figure 1.

- c) Fold the test piece over 180°, adjacent to, and parallel with, the scribed line. Attach the metal plate and the free end of the test piece to the jaws of a universal testing machine and set the speed of the jaw separation to 254 mm per min.
- d) Note the force at which any part of the coating first separates from the base material. If this is less than 0.4 N, the tape has failed the test. If the test piece peels away from the double-sided pressure sensitive tape before the force exceeds 0.2 N, an alternative type of double-sided pressure sensitive tape shall be used.
- e) Repeat a) to d) for the back coating.

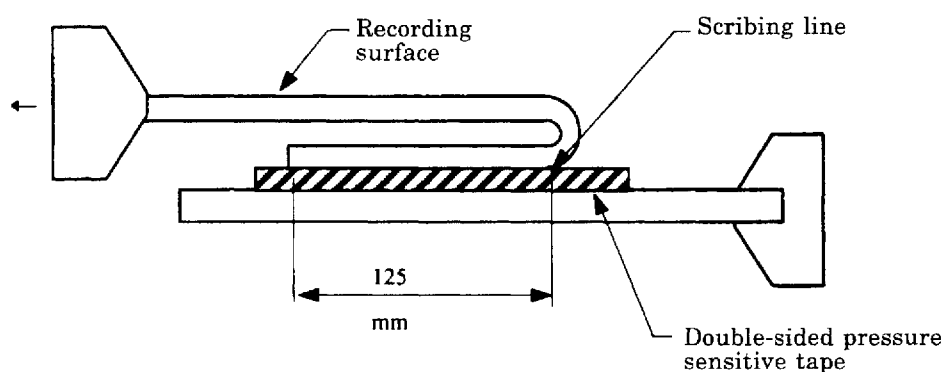


Figure 1 Measurement of the coating adhesion

7.11 Layer-to-layer adhesion Layer-to-layer adhesion refers to the tendency of a layer, when held in close proximity to the adjacent layer, to bond itself to an adjacent layer so that free and smooth separation of the layers is difficult.

7.11.1 Requirements There shall be no evidence of delamination or other damage to the coatings.

7.11.2 Procedure

- a) Fasten one end of a 914 mm length of tape, magnetic coating inwards, to a horizontally mounted stainless steel cylinder shown in figure 1 with a low cold-flow adhesive material.
- b) The dimensions of the cylinder shall be:
 - diameter: 12.7 mm
 - length: 102 mm
- c) Attach a mass of 1 000 g to the opposite end of the tape.
- d) Attach, 25.4 mm above the mass, a narrow strip of double-sided adhesive tape to the magnetic coating.
- e) Slowly rotate the cylinder, so that the tape winds uniformly around it into a compact and even roll. The double-sided tape secures the end and prevents unwinding when the mass is removed.

- f) The cylinder with the tape shall then be exposed to the following temperature and humidity cycle:

Time	Temperature	RH
16 h to 18 h	54 °C	85 %
4 h	54 °C	10 % or less
1 h to 2 h	21 °C	45 %

- g) Open the end of the roll and remove the double-sided adhesive tape.
h) Release the free end of the tape.
i) The outer one or two wraps shall spring loose without adhesion.
j) Hold the free end of the tape and allow the cylinder to fall, thereby unwinding the tape.
k) The tape shall show no coating delamination, except for the 51 mm of tape nearest to the cylinder.

Unit : mm

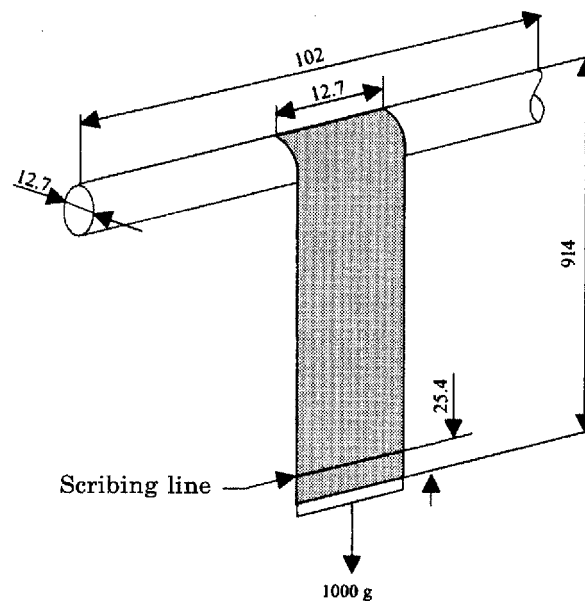


Figure 2 Measurement of layer-to-layer adhesion

7.12 Modulus of elasticity The modulus of elasticity (Young's modulus) is the ratio of stress to strain in the longitudinal direction.

7.12.1 Requirement The modulus of elasticity shall be between 4 900 N/mm² and 11 700 N/mm².

7.12.2 Procedure Clamp a test piece of tape at least 178 mm in length with an initial 102 mm separation between the jaws of a universal testing machine with a nominal crosshead speed of 3 mm per minute. Calculate the modulus using the chord of the curve between the force at 0 % and 1 % elongation.

7.13 Flexural rigidity Flexural rigidity is the ability of the tape to resist bending in the longitudinal direction.

7.13.1 Requirement The flexural rigidity of the tape in the longitudinal direction shall be between 2×10^{-7} N·mm and 8×10^{-7} N·mm.

7.13.2 Procedure Calculate the flexural rigidity D from the following equation:

$$D = E \times t^3 / 12 \times (1 - \nu^2)$$

where: E : modulus of elasticity obtained from 7.12
 t : measured thickness of the tape in mm
 ν : Poisson's ratio, set to 0.33

7.14 Tensile yield force The tensile yield force required to elongate the test piece by 3 % shall not be less than 9.6 N.

7.14.1 Procedure Use a static-weighing-constant-rate-of-grip separation tester capable of indicating the load with an accuracy of 2 %. Clamp a test piece of tape at least 178 mm long with an initial 102 mm separation between the jaws. Elongate the test piece at a rate of 51 mm per minute until a minimum elongation of 10 % is reached. The force required to produce an elongation of 3 % is the tensile yield force.

7.15 Electrical resistance

7.15.1 Requirement The electrical resistance of any square area of the magnetic coating shall

- be greater than $5 \times 10^6 \Omega$
- not exceed $50 \times 10^{12} \Omega$

The electrical resistance of any square area of the back coating shall

- not exceed $100 \times 10^6 \Omega$

7.15.2 Procedure Condition a test piece of tape in the test environment for 24 h. Position the test piece over two 24-carat gold-plated, semi-circular electrodes having a radius $r = 25.4$ mm and a finish of at least N4 (see **ISO 1302**), so that the recording surface is in contact with each electrode. These electrodes shall be placed parallel to the ground and parallel to each other at a distance $d = 12.7$ mm between their centres. Apply a force F of 1.62 N to each end of the test piece. Apply a d.c. voltage of $100 \text{ V} \pm 10 \text{ V}$ across the electrodes and measure the resulting current flow. From this value, determine the electrical resistance.

Repeat for a total of 5 positions along the test piece and average the 5 resistance readings. For the back coating repeat the procedure with the back surface in contact with the electrodes.

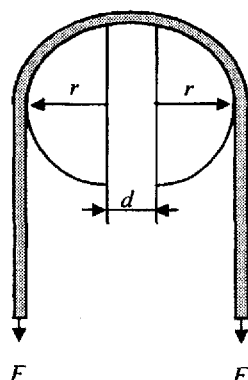


Figure 3 Measurement of electrical resistance

When mounting the test piece, make sure that no conducting paths exist between the electrodes except that through the coating under test.

NOTE : Particular attention should be given to keeping the surfaces clean.

7.16 Inhibitor tape This Standard does not specify parameters for assessing whether or not a tape is an inhibitor tape. However, annex J gives further information on inhibitor tapes.

7.17 Abrasivity Tape abrasivity is the tendency of the magnetic coating to wear the magnetic heads.

7.17.1 Requirement The depth of the wear pattern in a ferrite wear bar shall be less than 1.27 μm .

7.17.2 Procedure A test piece 61 m in length shall be passed for 100 passes (50 cycles) over a rectangular bar of manganese zinc ferrite shown in figure 4. The bar shall be 0.3 mm wide and its top surface shall be rounded off with a radius $r_0 = 5$ mm. The tape speed shall be 2.54 m/s, the tension shall be nominally 1.3 N and the wrap angle shall be 12° . The wear depth is measured with a profilometer across the width of the tape path.

Information : Manganese zinc ferrite should be available from Philips Ceramic Division in Saugerties (NY) under order part number 3H7.

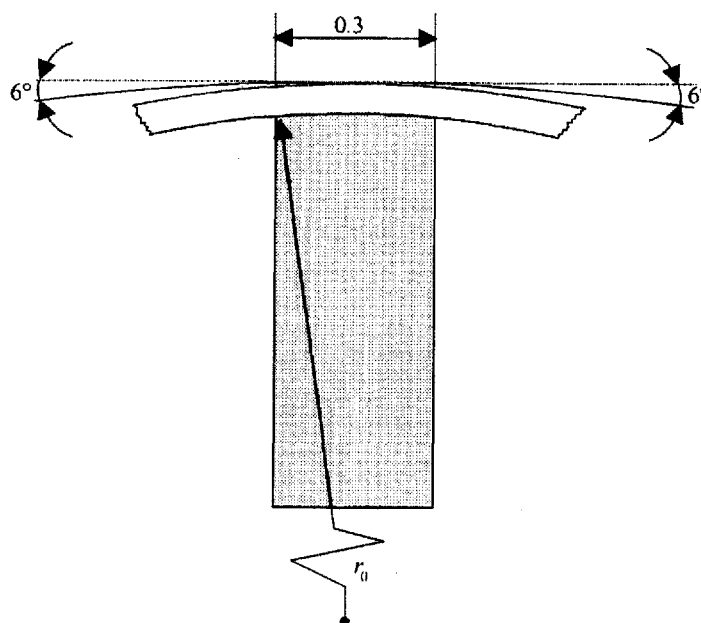


Figure 4 Measurement of abrasivity (not to scale)

7.18 Light transmittance of the tape and the leader The light transmittance of the tape and the leader shall be less than 5 % when measured according to the method specified in annex A.

7.19 Coefficient of dynamic friction The coefficient of dynamic friction is measured between the surfaces of the tape, and calcium titanate ceramic.

7.19.1 Requirements

Between the magnetic surface and the back surface:	greater than 0.15
Between the magnetic surface and calcium titanate ceramic:	0.05 to 0.35
Between the back surface and calcium titanate ceramic:	0.05 to 0.20

7.19.2 Procedure for the measurement of the friction between the magnetic surface and the back surface

- Wrap a first piece of tape around a calcium titanate ceramic cylinder ($R_a = 0.05 \mu\text{m}$) of diameter 25.4 mm and wrap it with a total wrap angle of more than 90° with the back surface outwards.
- Wrap a second test piece, with the magnetic surface inwards, around the first test piece with a total wrap angle of 90° .
- Exert on one end of the outer test piece a force of $F_1 = 0.64 \text{ N}$.
- Attach the other end to a force gauge mounted on a linear slide.
- Drive the slide at a speed of 1 mm/s, measure the force F_2 required.
- Calculate the coefficient of dynamic friction γ from the equation

$$\gamma = 1/\phi \times \ln (F_2/F_1)$$

where, ϕ : the value of the wrap angle in radians.

7.19.3 Procedure for the measurement of the friction between the magnetic surface or the back surface and calcium titanate ceramic

- Wrap a piece of tape around a calcium titanate ceramic cylinder ($R_a = 0.05 \mu\text{m}$) of diameter 25.4 mm and wrap it with a total wrap angle of 90° with the magnetic surface or the back surface, as appropriate, inwards.
- Exert on one end of the test piece a force of $F_1 = 0.64 \text{ N}$.
- Attach the other end to a force gauge mounted on a linear slide.
- Drive the slide at a speed of 1 mm/s, measure the force F_2 required.
- Calculate the coefficient of dynamic friction γ from the equation

$$\gamma = 1/\phi \times \ln (F_2/F_1)$$

where, ϕ : the value of the wrap angle in radians.

Information : Calcium titanate ceramic should be available from Philips Ceramic Division in Saugerties (NY) under order part CaTi.

8 Magnetic recording characteristics The magnetic recording characteristics shall be defined by testing the requirements given below.

When performing the tests, the output or resultant signal shall be measured on the same relative pass for both a tape calibrated to the master standard reference tape and the tape under test (read-while-write, or on equipment without read-while-write capability, on the first forward-read-pass) on the same equipment.

The following conditions shall apply to the testing of all magnetic recording characteristics, unless otherwise noted.

- Tape condition: a.c. erased to 2 % or less of the average signal amplitude
- Tape speed: $4.26 \text{ m/s} \pm 0.05 \text{ m/s}$
- Read track: within the written track
- Gap alignment: the read gap and the write gap to be parallel within $38.1 \mu\text{m}$
- Write gap length: $0.64 \mu\text{m} \pm 0.18 \mu\text{m}$
- Write gap width: $0.216 \text{ mm} \pm 0.010 \text{ mm}$
- Read gap length: $0.18 \mu\text{m} \pm 0.05 \mu\text{m}$
- Read gap width: $39.4 \mu\text{m} \pm 5.0 \mu\text{m}$
- Tape tension: $0.79 \text{ N} \pm 0.08 \text{ N}$
- Recording current: test recording current
- Physical recording densities: $2f = 2\,578 \text{ ftpmm} \pm 44 \text{ ftpmm}$, corresponding to $5.5 \text{ MHz} \pm 2 \%$
 $1f = 1\,289 \text{ ftpmm} \pm 22 \text{ ftpmm}$, corresponding to $2.75 \text{ MHz} \pm 2 \%$
- Bandwidth of the read amplifier: 10.0 MHz

8.1 Typical field The typical field shall be between 75 % and 125 % of the reference field.

Traceability to the reference field is provided by the calibration factors supplied with each secondary standard reference tape.

8.2 Signal amplitude The average signal amplitude shall be between 85 % and 115 % of the SRA.

Traceability to the SRA is provided by the calibration factors supplied with each secondary standard reference tape.

8.3 Resolution The ratio of the average signal amplitude at the physical recording density of 2 578 ftpmm to that at the physical recording density of 1 289 ftpmm shall be between 90 % and 120 % of the same ratio for the master standard reference tape.

Traceability to the resolution of the master standard reference tape is provided by the calibration factors supplied with each secondary standard reference tape.

8.4 Overwrite Overwrite is the ratio of the residual signal of the average signal amplitude recorded at 1 289 ftpmm after being overwritten at 2 578 ftpmm to the average signal amplitude of the 1 289 ftpmm signal.

8.4.1 Requirement The overwrite for the tape shall be less than 110 % of the overwrite for the master standard reference tape.

Traceability to the overwrite of the master standard reference tape is provided by the calibration factors supplied with each secondary standard reference tape.

8.5 Peak shift Peak shift is measured as the time displacement from nominal of the ONEs transitions in the recorded pattern 110110110...with a bit cell length of 0.129 μm .

8.5.1 Requirement For a peak shift ratio of n % for the master standard reference tape, the measured peak shift ratio shall be between $(n - 2)$ % and $(n + 2)$ %.

Traceability to the peak shift ratio of the master standard reference tape is provided by the calibration factors supplied with each secondary standard reference tape.

8.5.2 Procedure The time interval measurements shall be averaged over 250 ONE-ONE-ZERO patterns taken at a sampling rate of 96 times $2f$.

The time between adjacent peaks in the ONE-ONE interval is denoted as t_1 . The time between the last ONE in the ONE-ONE interval to the last ONE in the following ONE-ONE interval is denoted as t_0 .

$$PS = (3t_1 - t_0) / 2t_0 \times 100 \%$$