



Information technology — Generic cabling for customer premises

Part 3: Industrial premises (ISO/IEC 11801-3:2017, MOD)



AS 11801.3:2019

This Australian Standard® was prepared by CT-001, Communications Cabling. It was approved on behalf of the Council of Standards Australia on 3 May 2019.

This Standard was published on 24 April 2019.

The following are represented on Committee CT-001:

- Australian Chamber of Commerce and Industry
- Australian Council of Trade Unions
- Australian Digital and Telecommunications Industry Association
- Australian Industry Group
- Australian Information Industry Association
- BICSI South Pacific (Australia)
- Energy Networks Australia
- Engineers Australia
- KNX National Group
- National Electrical and Communications Association
- Telstra Corporation

This Standard was issued in draft form for comment as DR AS 11801.3:2018.

Keeping Standards up-to-date

Ensure you have the latest versions of our publications and keep up-to-date about Amendments, Rulings, Withdrawals, and new projects by visiting:

www.standards.org.au

ISBN 978 1 76072 433 7



Information technology — Generic cabling for customer premises

Part 3: Industrial premises (ISO/IEC 11801-3:2017, MOD)

Originated as AS/NZS ISO/IEC 24702:2007.
Revised and redesignated as AS 11801.3:2019.

COPYRIGHT

© ISO/IEC 2019 — All rights reserved
© Standards Australia Limited 2019

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968 (Cth).

Preface

This Standard was prepared by the Australian members of the Joint Standards Australia/Standards New Zealand Committee CT-001, Communications Cabling. AS/NZS 11801.1 in conjunction with AS 11801.3, supersedes AS/NZS 24702:2007, *Telecommunications installations — Generic cabling — Industrial premises*.

The objective of this Standard specifies generic cabling for use within industrial premises, or industrial areas within other types of premises, which can comprise single or multiple buildings on a campus. It covers balanced cabling and optical fibre cabling.

This Standard is optimized for premises in which the maximum distance over which telecommunications services can be distributed is 10 000 m. The principles of this Standard can be applied to larger installations.

Cabling defined by this Standard supports a wide range of services, including automation, process control, and monitoring applications. That can also incorporate the supply of power.

This Standard specifies directly or via reference to AS/NZS ISO/IEC 11801-1—

- (a) the structure and minimum configuration for generic cabling within industrial premises;
- (b) the interfaces at the telecommunications outlet (TO);
- (c) the performance requirements for cabling links and channels;
- (d) the implementation requirements and options;
- (e) the performance requirements for cabling components; and
- (f) the conformance requirements and verification procedures.

The cabling providing critical automation, process control and monitoring applications within the automation islands is not addressed by this Standard. Information for this application specific cabling is provided in the IEC 61784-5series (design) and in IEC 61918 (installation).

Safety (electrical safety and protection, fire, etc.) and electromagnetic compatibility (EMC) requirements are outside the scope of this Standard, and are covered by other Standards and by regulations. However, information given by this Standard can be of assistance.

This Standard is intended to be read in conjunction with AS/NZS 11801.1, *Information Technology — Generic cabling for customer premises, Part 1: General requirements (ISO/IEC 11801-1:2017, MOD)*.

This Standard is one of a series of customer cabling Standards addressing design, minimum specification and performance of links and channels, cable/cabling accommodation and installation, conformance testing and administration.

This Standard is part of a series of Standards which are associated with other Australian Standards, Australia/New Zealand Standards and International Standards.

Standards which are part of the series and Standards that are associated with this Standard are as follows:

AS/NZS 11801.1, *Information technology—Generic cabling for customer premises, Part 1: General requirements (ISO/IEC 11801-1:2017, MOD)*

AS 11801.2, *Information technology—Generic cabling for customer premises, Part 2: Office premises (ISO/IEC 11801-2:2017, MOD)*

AS 11801.3, *Information technology—Generic cabling for customer premises, Part 3: Industrial premises (ISO/IEC 11801-3:2017, MOD)* (this Standard)

AS 11801.4, *Information technology—Generic cabling for customer premises, Part 4: Single-tenant homes (ISO/IEC 11801-4:2017, MOD)*

AS 11801.5, *Information technology—Generic cabling for customer premises, Part 5: Data centres (ISO/IEC 11801-5:2017, MOD)*

AS 11801.6, *Information technology—Generic cabling for customer premises, Part 6: Distributed building services (ISO/IEC 11801-6:2017, MOD)*

AS 30129, *Information technology—Telecommunications bonding networks for buildings and other structures (ISO/IEC 30129:2015, MOD)*

AS/NZS 2967, *Optical fibre communication cabling systems safety*

AS/NZS 3084, *Telecommunications installations—Telecommunications pathways and spaces for commercial buildings*

AS/NZS 3085.1, *Telecommunications installations—Administration of communications cabling systems, Part 1: Basic requirements*

AS/NZS ISO/IEC 14763.2, *Information technology—Implementation and operation of customer premises cabling, Part 2: Planning and installation*

AS/NZS 14763.3, *Information technology—Implementation and operation of customer premises cabling, Part 3: Testing of optical fibre cabling (ISO/IEC 14763-3:2014, MOD)*

IEC 61935.1, *Specification for the testing of balanced and coaxial information technology cabling — Part 1: Installed balance cabling as specified in ISO/IEC 11801 and related standards*

IEC 61935.2, *Specification for the testing of balanced and coaxial information technology cabling — Part 2: Cords as specified in ISO/IEC 11801 and related standards*

This Standard is an adoption with national modifications, and has been reproduced from, ISO/IEC 11801-3:2017, *Information technology — Generic cabling for customer premises — Part 3: Industrial premises* and its Corrigendum No. 1 (2018). The modifications in Appendix ZZ are additional requirements, which have been added at the end of the source text.

Appendix ZZ lists the variations to ISO/IEC 11801-3:2017 for the application of this Standard in Australia.

This Standard is structured as follows:

- (i) Preface.
- (ii) ISO/IEC 11801-3:2017 (unedited from the contents page to the final clause of the source document) and its Corrigendum No. 1 (2018).
- (iii) Appendix ZZ lists the variations to ISO/IEC 11801-3:2017 for the application of this Standard in Australia.

As this document has been reproduced from an International Standard, the following applies:

- (A) In the source text “this part of ISO/IEC 11801” should read “this Australian Standard”.
- (B) A full point substitutes for a comma when referring to a decimal marker.

Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably. Refer to the online catalogue for information on specific Standards.

The terms “normative” and “informative” are used in Standards to define the application of the appendices or annexes to which they apply. A “normative” appendix or annex is an integral part of a Standard, whereas an “informative” appendix or annex is only for information and guidance.

CONTENTS

FOREWORD.....	5
INTRODUCTION.....	7
1 Scope.....	10
2 Normative references	10
3 Terms, definitions, abbreviated terms and symbols.....	11
3.1 Terms and definitions.....	11
3.2 Abbreviated terms.....	12
3.3 Symbols.....	12
4 Conformance.....	12
5 Structure of the generic cabling system	13
5.1 General.....	13
5.2 Functional elements.....	13
5.3 Cabling subsystem.....	14
5.3.1 General structure.....	14
5.3.2 Campus and building backbone cabling subsystem.....	15
5.3.3 Floor cabling subsystem	15
5.3.4 Intermediate cabling subsystem.....	15
5.3.5 Centralized cabling architecture.....	16
5.3.6 Design objectives	16
5.4 Interconnection of subsystems	16
5.5 Accommodation of functional elements	18
5.6 Interfaces.....	19
5.6.1 Equipment interfaces and test interfaces	19
5.6.2 Channels and permanent links.....	19
5.7 Dimensioning and configuring	19
5.7.1 General	19
5.7.2 Distributors	19
5.7.3 Connecting hardware.....	20
5.7.4 Apparatus attachment and equipment cords	20
5.7.5 Patch cords and jumpers	20
5.7.6 Telecommunications outlet	20
5.7.7 Telecommunications rooms and equipment rooms.....	21
5.7.8 Industrial enclosures.....	21
6 Channel performance requirements	21
6.1 General.....	21
6.2 Environmental performance	22
6.3 Transmission performance	22
6.3.1 General	22
6.3.2 Balanced cabling	22
6.3.3 Optical fibre cabling.....	23
7 Link performance requirements	23
7.1 General.....	23
7.2 Balanced cabling	23
7.3 Optical fibre cabling	23
8 Reference implementations	23
8.1 General.....	23

8.2	Balanced cabling	23
8.2.1	General	23
8.2.2	Intermediate cabling subsystem	24
8.2.3	Floor cabling subsystem	26
8.2.4	Campus and building backbone cabling subsystem	28
8.3	Optical fibre cabling	28
9	Cable requirements	28
9.1	General	28
9.2	Balanced cables	28
9.3	Optical fibre cables	29
10	Connecting hardware requirements	29
10.1	General requirements	29
10.2	Connecting hardware for balanced cabling	29
10.2.1	General requirements	29
10.2.2	Electrical, mechanical and environmental performance	29
10.3	Connecting hardware for optical fibre cabling	30
10.3.1	General requirements	30
10.3.2	Optical, mechanical and environmental performance	30
11	Cords	30
11.1	Jumpers	30
11.2	Balanced cords	30
11.2.1	General	30
11.2.2	Additional requirements for apparatus attachment cords	30
11.3	Optical fibre cords	30
Annex A (normative)	Industrial cabling system	31
A.1	General	31
A.2	Industrial intermediate cabling subsystem	31
Annex B (normative)	Additional reference implementations	33
B.1	General	33
B.2	Channel configurations	33
B.2.1	General	33
B.2.2	Channels with no connections	33
B.2.3	Channels with inter-connections	34
B.2.4	End-to-end link (E2E link)	35
B.3	Channels using balanced cabling bulkhead connections	36
Annex C (informative)	Other implementations	38
C.1	General	38
C.2	Channels using balanced cabling bulkhead connections with additional connections	38
Bibliography		41
Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25		7
Figure 2 – Relationships between the ISO/IEC and IEC cabling documents that apply to industrial premises		8
Figure 3 – Configuration of apparatus-based functional elements within industrial premises		14
Figure 4 – Structure of generic cabling for industrial environment		14

Figure 5 – Centralized structure of generic cabling for industrial premises	16
Figure 6 – Hierarchical structure of generic cabling for industrial premises	17
Figure 7 – Inter-relationship of functional elements in an installation with diversity for protection against failure (CPs optional between IDs and TOs)	17
Figure 8 – Accommodation of functional elements (CPs optional between IDs and TOs)	18
Figure 9 – Equipment and test interfaces	19
Figure 10 – Transmission performance of a channel	21
Figure 11 – Example of a system showing the location of cabling interfaces and extent of associated channels	22
Figure 12 – Intermediate cabling models.....	25
Figure 13 – Floor cabling model.....	27
Figure A.1 – Industrial cabling system supporting several AIs via an IID	31
Figure A.2 – Combined structure of generic and industrial cabling system using an IID.....	32
Figure B.1 – Channel configurations without intermediate connections	34
Figure B.2 – Channel configurations with inter-connections	35
Figure B.3 – Channel configurations with bulkhead connections	36
Figure C.1 – Channel configurations with bulkhead and additional connections	39
Table 1 – Maximum channel lengths	20
Table 2 – Length assumptions used in the mathematical modelling of balanced intermediate cabling.....	25
Table 3 – Intermediate link length equations	26
Table 4 – Floor link length equations	28
Table B.1 – Channel length equations for balanced cabling with inter-connections	35
Table B.2 – Channel length equations with bulkhead connections.....	37
Table C.1 – Channel equations with bulkhead and additional connections	40

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES

Part 3: Industrial premises

FOREWORD

- 1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.
- 2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.
- 3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 11801-3 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This first edition cancels and replaces ISO/IEC 24702:2006 and Amendment 1:2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) standard re-structured to contain only those requirements that are specific for generic cabling systems installed in industrial premises;
- b) support of critical process control, monitoring and automation (PCMA) services between automation islands by adding new Annex A (normative) "Industrial cabling system";
- c) support of specific requirements for industrial cabling the end-to-end link (E2E) has been introduced and delivers additional channel configuration covered in Annex B (normative);
- d) silica optical fibre cabling has been removed from this International Standard.

ISO/IEC 11801-3 is to be read in conjunction with ISO/IEC 11801-1.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the ISO/IEC 11801 series, published under the general title *Information technology – Generic cabling for customer premises*, can be found on the IEC website.

INTRODUCTION

The importance of cabling infrastructure is similar to that of other fundamental utilities such as water and energy supply and interruptions to the services provided over that infrastructure can have a serious impact. A lack of design foresight, the use of inappropriate components, incorrect installation, poor administration or inadequate support can threaten quality of service and have commercial consequence for all types of users.

This document specifies generic cabling, which is critical for providing robust services to the automation islands in industrial premises, or industrial spaces within other types of building.


Additionally those premises can include

- office spaces for which generic cabling is specified in ISO/IEC 11801-2,
- data centre spaces for which generic cabling is specified in ISO/IEC 11801-5.

Generic cabling for distributed building services in industrial spaces is specified in ISO/IEC 11801-6, which addresses all of the above premises and spaces within them.

This document has taken into account the correlation between all parts of the ISO/IEC 11801 series and the IEC 61918 and IEC 61784-5 series.

Figure 1 shows the schematic and contextual relationships between the standards relating to information technology cabling produced by ISO/IEC JTC 1/SC 25, namely the ISO/IEC 11801 series of standards for generic cabling design, standards for the installation, operation and administration of generic cabling and for testing of installed generic cabling.

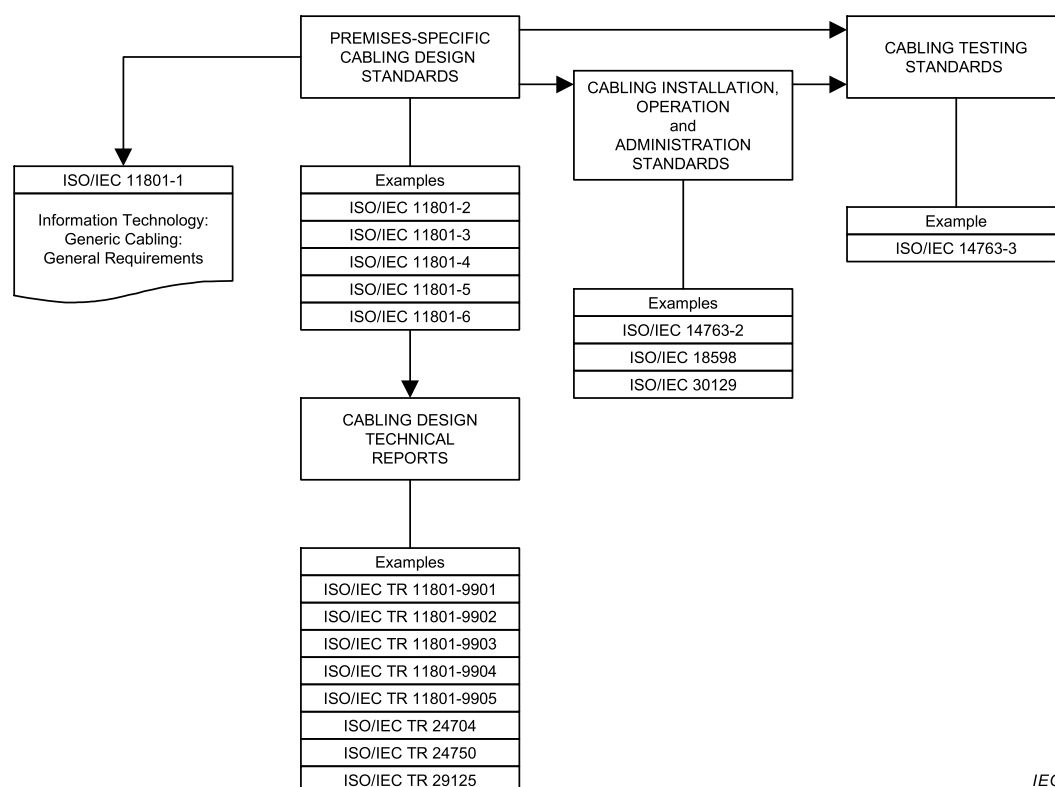

IEC

Figure 1 – Relationships between the generic cabling documents produced by ISO/IEC JTC 1/SC 25

The generic cabling specified by this document provides users with

- a) an application independent system capable of supporting a wide range of applications in a range of installation and operating environments,
- b) a flexible scheme such that modifications are both easy and economical,
- c) a multi-vendor supply chain within an open market for cabling components.

In addition, this document provides

- d) relevant industry professionals with guidance allowing the accommodation of cabling before specific requirements are known, i.e. in the initial planning either for construction or refurbishment and for further deployment as the requirements of areas are defined,
- e) industry and standardization bodies with a cabling system which supports current products and provides a basis for future product development and applications standardization.

Applications addressed in this document include those developed by the technical committees of IEC (including the subcommittees of ISO/IEC JTC 1), including critical industrial process control and monitoring applications and study groups of ITU-T.

As a result, this document

- 1) specifies a structure for generic cabling supporting a wide variety of applications,
- 2) adopts balanced cabling channel and link Classes D, E, E_A, F and F_A, specified in ISO/IEC 11801-1,
- 3) adopts component requirements, specified in ISO/IEC 11801-1, and specifies cabling implementations that ensure performance of permanent links and of channels that meet or exceed the requirements of a specified group (e.g. Class) of applications.

Figure 2 shows the relationship between all the documents (the generic cabling standards produced by ISO/IEC JTC 1/SC 25 and the application-specific standards produced by IEC SC 65C) that apply to industrial premises.

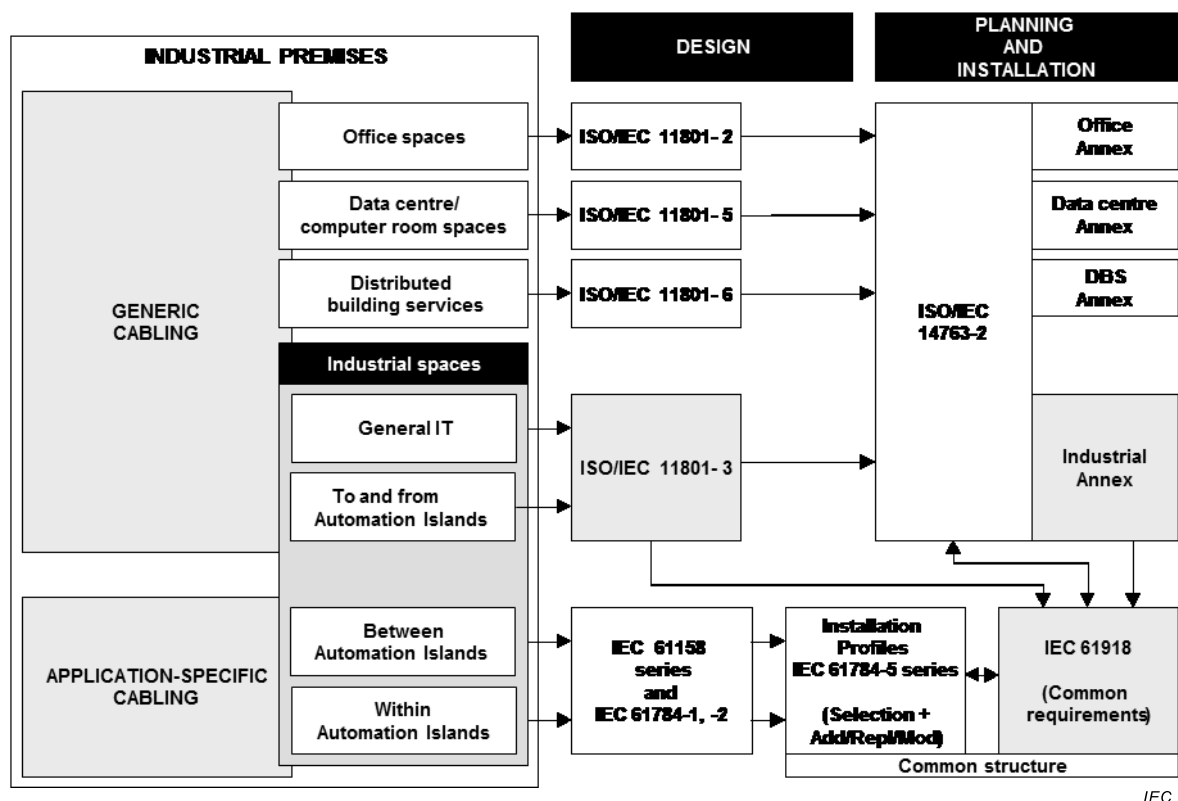


Figure 2 – Relationships between the ISO/IEC and IEC cabling documents that apply to industrial premises

It is anticipated that the generic cabling system meeting the minimum requirements of this document will have a life expectancy consistent with other infrastructures within industrial premises.

This document has taken into account requirements specified in application standards listed in ISO/IEC 11801-1:2017, Annex E. It refers to International Standards for components and test methods whenever appropriate International Standards are available.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES

Part 3: Industrial premises

1 Scope

This part of ISO/IEC 11801 specifies generic cabling for use within industrial premises, or industrial areas within other types of premises, which can comprise single or multiple buildings on a campus. It covers balanced cabling and optical fibre cabling.

This document is optimized for premises in which the maximum distance over which telecommunications services can be distributed is 10 000 m. The principles of this document can be applied to larger installations.

Cabling defined by this document supports a wide range of services, including automation, process control, and monitoring applications. That can also incorporate the supply of power.

This document specifies directly or via reference to ISO/IEC 11801-1

- a) the structure and minimum configuration for generic cabling within industrial premises,
- b) the interfaces at the telecommunications outlet (TO),
- c) the performance requirements for cabling links and channels,
- d) the implementation requirements and options,
- e) the performance requirements for cabling components,
- f) the conformance requirements and verification procedures.

The cabling providing critical automation, process control and monitoring applications within the automation islands is not addressed by this document. Information for this application-specific cabling is provided in the IEC 61784-5 series (design) and in IEC 61918 (installation).

Safety (electrical safety and protection, fire, etc.) and electromagnetic compatibility (EMC) requirements are outside the scope of this document, and are covered by other standards and by regulations. However, information given by this document can be of assistance.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61918, *Industrial communication networks – Installation of communication networks in industrial premises*

IEC 61754-20, *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces – Part 20: Type LC connector family*

IEC 61784-5 (all parts), *Industrial communication networks – Profiles – Part 5: Installation of fieldbuses – Installation profiles for CPF*

ISO/IEC 11801-1:2017, *Information technology – Generic cabling for customer premises – Part 1: General requirements*

ISO/IEC 11801-2, *Information technology – Generic cabling for customer premises – Part 2: Office premises*

ISO/IEC 14763-2, *Information technology – Implementation and operation of customer premises cabling – Part 2: Planning and installation*

ISO/IEC 14763-4, *Information technology – Implementation and operation of customer premises cabling – Part 4: Measurement of end-to-end (E2E) links*¹

ISO/IEC 30129, *Information technology – Telecommunications bonding networks for buildings and other structures*

3 Terms, definitions, abbreviated terms and symbols

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11801-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

apparatus

one or more pieces of equipment having specific and defined overall functions within industrial premises served by one or more network interfaces

3.1.2

apparatus attachment cord

cord used to connect a telecommunications outlet to a network interface

3.1.3

automation island

premises and areas where a combination of systems that control, monitor and protect process(es) of a plant are installed

3.1.4

automation outlet

fixed connecting hardware which provides an interface to the automation island (AI)

3.1.5

bulkhead

wall or barrier which maintains the ingress and climatic environmental classifications applicable on either side

3.1.6

equipment room

room dedicated to housing distributors and application-specific equipment

3.1.7

floor cable

cable connecting the floor distributor to the intermediate distributor

3.1.8

floor distributor

distributor used to make connections between the floor cable, other cabling subsystems and active equipment

3.1.9

intermediate cable

cable connecting the intermediate distributor to the telecommunications outlet

¹ Under preparation. Stage at time of publication: ISO/IEC CDV 14763-4:2017.

3.1.10**intermediate distributor**

distributor used to make connections between the intermediate cable, other cabling subsystems and active equipment

3.1.11**industrial intermediate distributor**

intermediate distributor used to make connections between several automation islands and transmit critical process control, monitoring and automation data (PCMA) between them

3.1.12**network interface**

interface between the apparatus attachment cabling and the apparatus network

3.1.13**telecommunications room**

enclosed space for housing telecommunications equipment, cable terminations, interconnect and cross-connect

3.2 Abbreviated terms

AI	automation island
AO	automation outlet
CPL	CP link
E2E link	end-to-end link
FD	floor distributor
ID	intermediate distributor
IID	industrial intermediate distributor
NI	network interface
PCMA	process control, monitoring and automation (data)

3.3 Symbols

Symbols used in this document are defined at the place where they occur.

Symbols used identically in different parts of ISO/IEC 11801 are defined in ISO/IEC 11801-1:2017, 3.3.

4 Conformance

For a cabling installation to conform to this document the following applies.

- a) The configuration and structure shall conform to the requirements outlined in Clause 5.
- b) Channels shall meet the requirements specified in Clause 6 when subjected to environment conditions, local to the channels (see NOTE below), as defined by the applicable environmental Class(es) of Clause 6.

This shall be achieved by one of the following:

- 1) a channel design and implementation ensuring that the prescribed channel performance of Clause 6 is met;
- 2) attachment of appropriate components to a permanent link or CP link design meeting the prescribed performance class of Clause 7. Channel performance shall be ensured where a channel is created by adding more than one cord to either end of a link meeting the requirements of Clause 7;
- 3) for E₁ environments, using the reference implementations of Clause 8 and compatible cabling components conforming to the requirements of Clauses 9, 10 and 11 based upon a statistical approach of performance modelling.