



Personal protective equipment

Part 3: Safety footwear (ISO 20345:2011, MOD)



This Australian Standard® was prepared by Committee SF-003, Occupational Protective Footwear. It was approved on behalf of the Council of Standards Australia on 17 April 2019. This Standard was published on 14 May 2019.

The following are represented on Committee SF-003:

- Association of Accredited Certification Bodies
 - Australasian Fire and Emergency Service Authorities Council
 - Australian Chamber of Commerce and Industry
 - Australian Industry Group
 - BSI Group Australian and New Zealand (Certification Bodies)
 - Department of Defence (Australian Government)
 - Energy Networks Australia
 - Footwear Manufacturers Association of Australia
 - Safety Institute of Australia
 - VicLabs (Testing Interests Australia)
-

This Standard was issued in draft form for comment as DR AS 2210.3:2018.

Standards Australia wishes to acknowledge the participation of the expert individuals that contributed to the development of this Standard through their representation on the Committee and through the public comment period.

Keeping Standards up-to-date

Australian Standards® are living documents that reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued.

Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments that may have been published since the Standard was published.

Detailed information about Australian Standards, drafts, amendments and new projects can be found by visiting **www.standards.org.au**

Standards Australia welcomes suggestions for improvements, and encourages readers to notify us immediately of any apparent inaccuracies or ambiguities. Contact us via email at **mail@standards.org.au**, or write to Standards Australia, GPO Box 476, Sydney, NSW 2001.

Australian Standard®

Personal protective equipment

Part 3: Safety footwear (ISO 20345:2011, MOD)

Originated as part of AS Z2—1952.
Previous editions AS/NZS 2210.2:2000, AS/NZS 2210.3:2000 and AS/NZS 2210.7:2001.
Jointly revised, amalgamated and designated as AS/NZS 2210.3:2009.
Revised and designated as AS 2210.3:2019.

COPYRIGHT

© Standards Australia Limited

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968.

ISBN 978 1 76072 457 3



Documents

Document Sharing Hub

PREFACE

This Standard was prepared by the Standards Australia Committee SF-003, to supersede AS/NZS 2210.3:2009, *Occupational protective footwear, Part 3: Specification for safety footwear (ISO 20345:2004, MOD)*.

The objective of this Standard is to specify basic and additional (optional) requirements for safety footwear used for general purpose. It includes, for example, mechanical risks, slip resistance, thermal risks, ergonomic behaviour.

This Standard is an adoption with national modifications and has been reproduced from ISO 20345:2011, *Personal protective equipment — Safety footwear* and has been varied as indicated to take account of Australian conditions. The modifications in Appendix ZZ are additional requirements. Appendix ZA provides additional information. These appendices have been added at the end of the source text.

Appendix ZZ lists the variations to ISO 20345:2011 for the application of this Standard in Australia.

Appendix ZA (informative) provides guidance for how conformity with this Standard can be demonstrated by the manufacturer or supplier.

As this Standard is reproduced from an International Standard, the following applies:

- (a) In the source text ‘this International Standard’ should read ‘this Australian Standard’.
- (b) A full point substitutes for a comma when referring to a decimal marker.

Australian or Australian/New Zealand Standards that are identical adoptions of international normative references may be used interchangeably. Refer to the online catalogue for information on specific Standards.

The term ‘normative’ has been used in this Standard to define the application of the appendix to which it applies. A ‘normative’ appendix is an integral part of a Standard.

CONTENTS

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification and designs	6
5 Basic requirements for safety footwear	8
5.1 General	8
5.2 Design	10
5.3 Whole footwear	11
5.4 Upper	14
5.5 Vamp and quarter lining	16
5.6 Tongue	17
5.7 Insole and insock	17
5.8 Outsole	18
6 Additional requirements for safety footwear	19
6.1 General	19
6.2 Whole footwear	20
6.3 Upper — Water penetration and absorption	24
6.4 Outsole	24
7 Marking	24
8 Information to be supplied	25
8.1 General	25
8.2 Electrical properties	26
8.3 Insocks	27
Annex A (normative) Hybrid footwear	28
Bibliography	30

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20345 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 161, *Foot and leg protectors*, in collaboration with Technical Committee ISO/TC 94, *Personal safety — Protective clothing and equipment*, Subcommittee SC 3, *Foot protection*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This second edition cancels and replaces the first edition (ISO 20345:2004), which has been technically revised. It also incorporates the Amendment ISO 20345:2004/Amd. 1:2007 and the Technical Corrigenda ISO 20345:2004/Cor.1:2005 and ISO 20345:2004/Cor.2:2006.

AUSTRALIAN STANDARD

Personal protective equipment**Part 3:
Safety footwear (ISO 20345:2011, MOD)****1 Scope**

This International Standard specifies basic and additional (optional) requirements for safety footwear used for general purpose. It includes, for example, mechanical risks, slip resistance, thermal risks, ergonomic behaviour.

Special risks are covered by complementary job-related standards (e.g. footwear for firefighters, electrical insulating footwear, protection against chain saw injuries, protection against chemicals and molten metal splash, protection for motor cycle riders).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17075, *Leather — Chemical tests — Determination of chromium(VI) content*

ISO 20344:2011, *Personal protective equipment — Test methods for footwear*

EN 12568:2010, *Foot and leg protectors — Requirements and test methods for toecaps and penetration resistant inserts*

EN 50321, *Electrically insulating footwear for working on low voltage installations*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

NOTE The component parts of footwear are illustrated in Figures 1 and 2.

3.1**safety footwear**

footwear incorporating protective features to protect the wearer from injuries that could arise through accidents

NOTE Items of safety footwear are fitted with toecaps designed to give protection against impact when tested at an energy level of at least 200 J and against compression when tested at a compression load of at least 15 kN.

3.2**leather**

hide or skin tanned to be imputrescible

3.2.1**leather split**

flesh or middle part of a hide or skin, obtained by splitting a thick leather, which is tanned to be imputrescible

3.3**rubber**

vulcanized elastomers

3.4**polymeric materials**

large molecules composed of repeating structural units (monomers) typically connected by chemical bond

EXAMPLE Polyurethane (PU) or polyvinylchloride (PVC).

3.5**insole**

non-removable component used to form the base of the shoe to which the upper is usually attached during lasting

3.6**insock**

removable or non-removable footwear component used to cover part or all of the insole

NOTE "Non-removable" means that the insock cannot be removed without being damaged.

3.7**lining**

material covering the inner surface of the upper

NOTE 1 The wearer's foot is in direct contact with the lining.

NOTE 2 Where an upper is split at the forepart to house the toecap, or if an external piece of material is stitched to the upper to form a pocket to house the toecap, the material under the toecap acts as a lining.

3.7.1**vamp lining**

material covering the inner surface of the forepart of the upper

3.7.2**quarter lining**

material covering the inner surface of the quarters of the upper

3.8**cleat**

protruding part of the outer surface of the sole

3.9**rigid outsole**

sole which cannot be bent through an angle of 45° under a load of 30 N

NOTE Testing is performed in accordance with ISO 20344:2011, 8.4.1.

3.10**cellular outsole**

outsole which has a density of 0,9 g/ml or less with a cell structure that is visible under 10× magnification

3.11**penetration-resistant insert**

footwear component placed in the sole complex in order to provide protection against penetration

3.12**safety toecap**

built-in footwear component designed to protect the toes of the wearer from impacts of an energy level of at least 200 J and compression at a load of at least 15 kN

3.13**seat region****counter area**

rear 10 % of the total length of the footwear (upper and sole)

3.14**conductive footwear**

footwear, the resistance of which is in the range of 0 k Ω to 100 k Ω

NOTE Resistance is measured in accordance with ISO 20344:2011, 5.10.

3.15**antistatic footwear**

footwear, the resistance of which is above 100 k Ω and less than or equal to 1 000 M Ω

NOTE Resistance is measured in accordance with ISO 20344:2011, 5.10.

3.16**electrically insulating footwear**

footwear which protects the wearer against electrical shocks by preventing the passage of dangerous current through the body via the feet

3.17**fuel oil**

aliphatic hydrocarbon constituent of petroleum

3.18**specific job-related footwear**

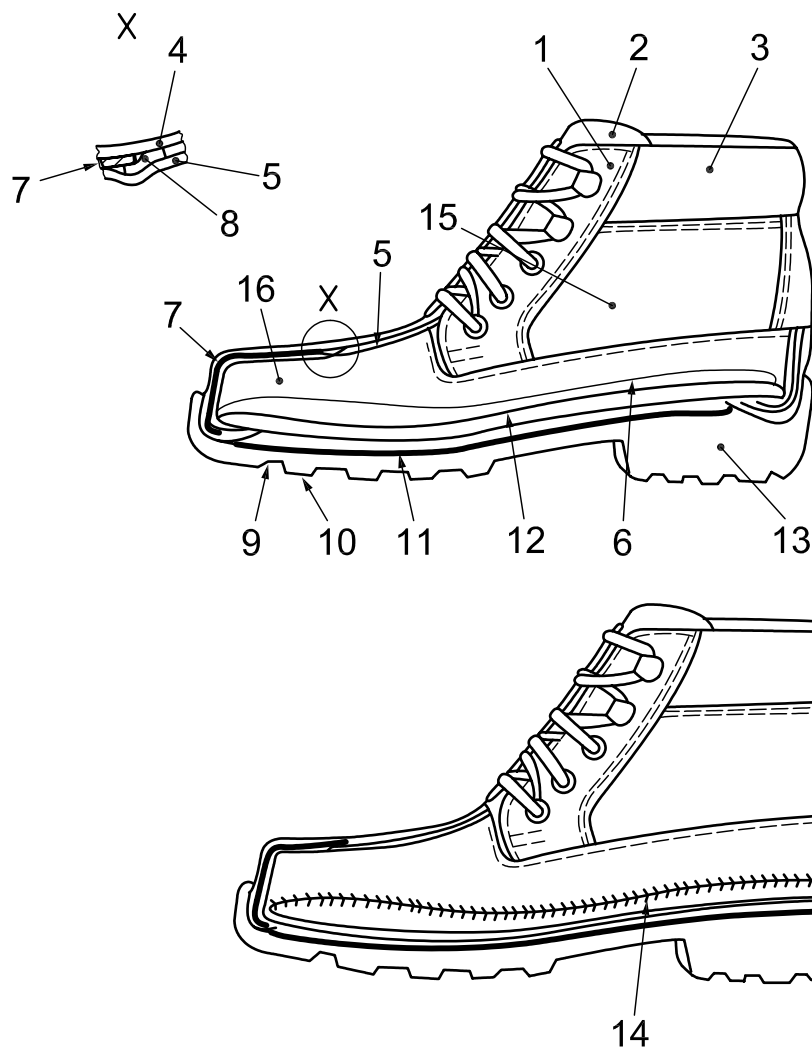
safety or occupational footwear relating to a specific profession

EXAMPLE Footwear for firefighters; footwear with resistance to chain saw cutting.

3.19**hybrid footwear**

class II footwear incorporating another material which extends the upper

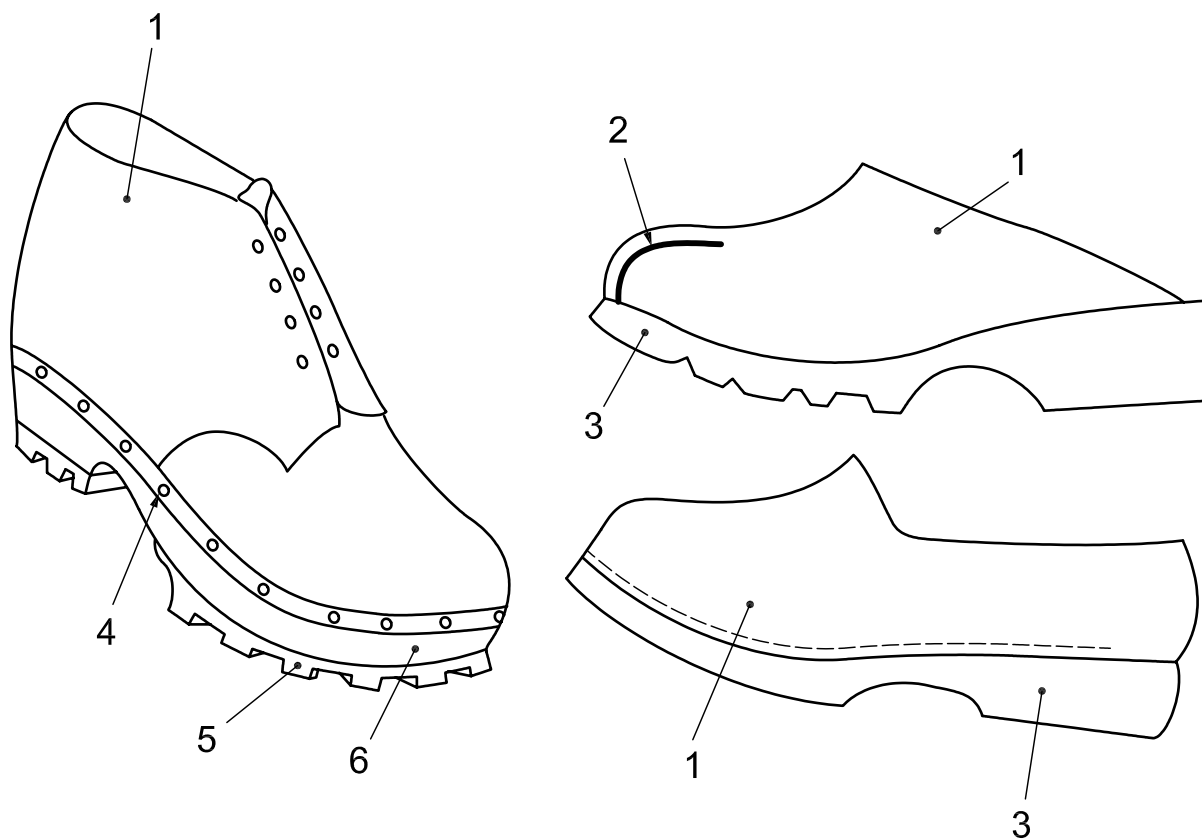
NOTE See Figure A.1.

**Key**

- 1 facing
- 2 tongue
- 3 collar
- 4 upper
- 5 vamp lining
- 6 insock
- 7 toecap
- 8 edge covering, e.g. foam strip
- 9 outsole
- 10 cleat
- 11 penetration-resistant insert
- 12 insole
- 13 heel
- 14 Strobel stitching
- 15 quarter
- 16 vamp

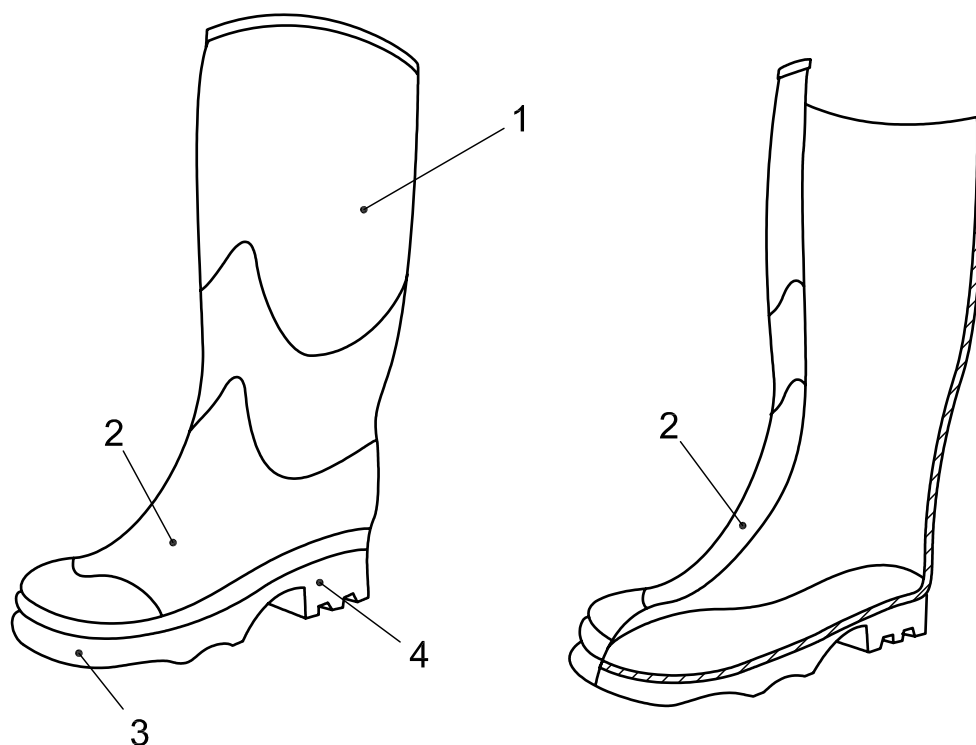
a) Example of parts of footwear of Strobel construction

Figure 1 (continued)

**Key**

- 1 upper
- 2 toecap
- 3 rigid sole
- 4 reinforcing welt with nails
- 5 outsole
- 6 wooden sole

b) Example of other footwear**Figure 1 — Types of footwear**

**Key**

- 1 upper
- 2 vamp
- 3 outsole
- 4 heel

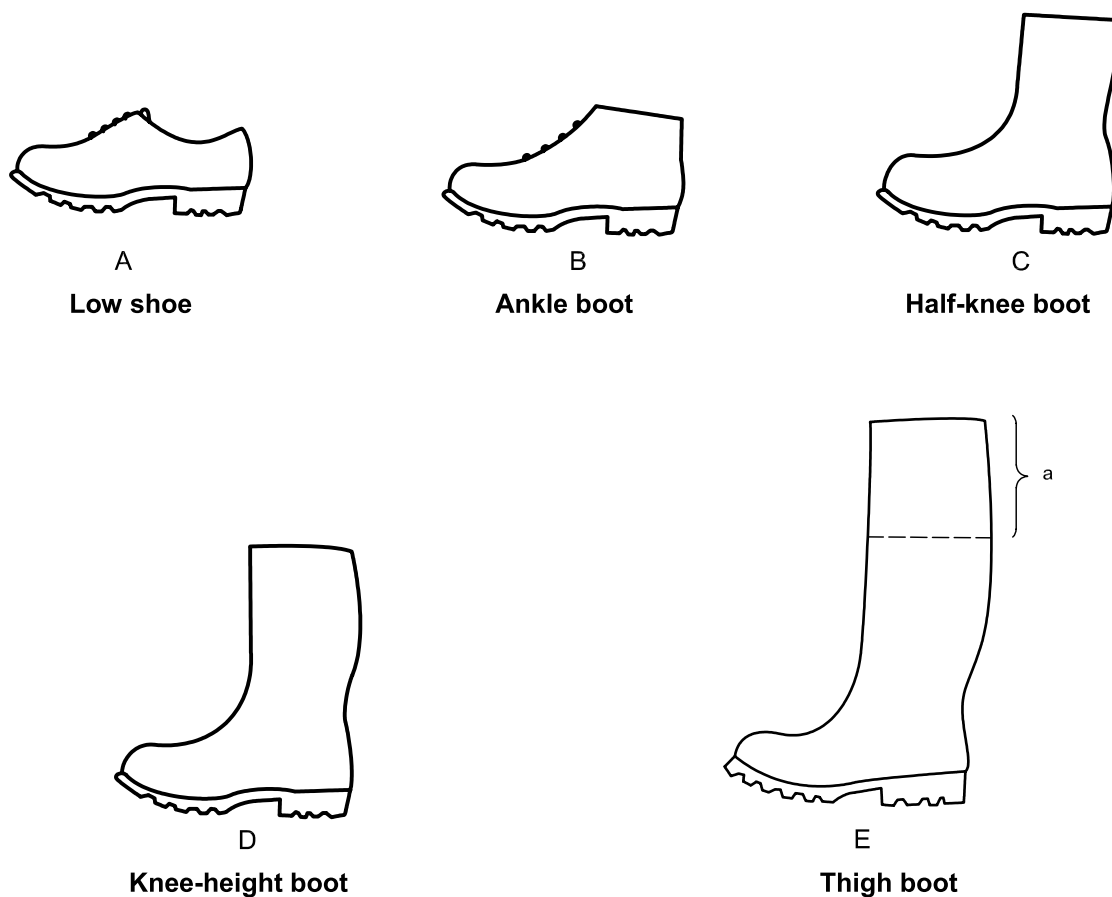
Figure 2 — Example of all-rubber (i.e. vulcanized) or all-polymeric (i.e. entirely moulded) footwear

4 Classification and designs

Footwear shall be classified in accordance with Table 1.

Table 1 — Classification of footwear

Classification	Description
Class I	Footwear made from leather and other materials, excluding all-rubber or all-polymeric footwear
Class II	All-rubber (i.e. entirely vulcanized) or all-polymeric (i.e. entirely moulded) footwear



^a Variable extension which can be adapted to the wearer.

NOTE Design E can be a knee-height boot (design D) equipped with a thin impermeable material which extends the upper and which can be cut to adapt the boot to the wearer.

Figure 3 — Designs of footwear

Class II footwear can be equipped with another material which extends the upper. The requirements for this footwear are given in Annex A.

5 Basic requirements for safety footwear

5.1 General

Safety footwear shall conform to the basic requirements given in Table 2.

Table 2 — Basic requirements for safety footwear

Requirement		Subclause	Classification	
			I	II
Design	Height of upper	5.2.2	X	X
	Seat region (design B, C, D, E)	5.2.3	X	X
Whole footwear	Sole performance:	5.3.1		
	— Construction	5.3.1.1	X	
	— Upper/outsole bond strength	5.3.1.2	X	
	Toe protection:	5.3.2		
	— General	5.3.2.1	X	X
	— Internal length of toecaps	5.3.2.2	X	X
	— Impact resistance	5.3.2.3	X	X
	— Compression resistance	5.3.2.4	X	X
	— Behaviour of toecaps	5.3.2.5	X	X
	Leakproofness	5.3.3		X
	Specific ergonomic features	5.3.4	X	X
	Slip resistance:	5.3.5	X	X
	— Slip resistance on ceramic tile floor with NaLS ^a	5.3.5.2		
	— Slip resistance on steel floor with glycerine ^b	5.3.5.3		
	— Slip resistance on ceramic tile floor with NaLS and on steel floor with glycerine ^c	5.3.5.4		
Upper	General	5.4.1	X	
	Thickness	5.4.2		X
	Tear strength	5.4.3	X	
	Tensile properties	5.4.4	X	X
	Flexing resistance	5.4.5		X
	Water vapour permeability and coefficient	5.4.6	X	
	pH value	5.4.7	X	
	Hydrolysis	5.4.8		X
	Chromium VI content	5.4.9	X	
Vamp lining	Tear strength	5.5.1	X	O
	Abrasion resistance	5.5.2	X	O
	Water vapour permeability and coefficient	5.5.3	X	
	pH value	5.5.4	X	O
	Chromium VI content	5.5.5	X	O