

Australian/New Zealand Standard™

**Information technology—Security
techniques—Encryption algorithms**

Part 3: Block ciphers



AS/NZS ISO/IEC 18033.3:2006

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee IT-012, Information Systems, Security and Identification. It was approved on behalf of the Council of Standards Australia on 31 March 2006 and on behalf of the Council of Standards New Zealand on 16 June 2006. This Standard was published on 10 June 2006.

The following are represented on Committee IT-012:

Attorney General's Department
Australia Post
Australian Association of Permanent Building Societies
Australian Bankers Association
Australian Chamber of Commerce and Industry
Australian Electrical and Electronic Manufacturers Association
Australian Information Industry Association
Certification Forum of Australia
Consumers' Federation of Australia
Department of Defence (Australia)
Department of Social Welfare New Zealand
Government Communications Security Bureau, New Zealand
Internet Industry Association
NSW Police Service
New Zealand Defence Force
Reserve Bank of Australia

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Web Shop at www.standards.com.au or Standards New Zealand web site at www.standards.co.nz and looking up the relevant Standard in the on-line catalogue.

Alternatively, both organizations publish an annual printed Catalogue with full details of all current Standards. For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of either Standards Australia or Standards New Zealand at the address shown on the back cover.

This Standard was issued in draft form for comment as DR 06036.

Australian/New Zealand Standard™

**Information technology—Security
techniques—Encryption algorithms**

Part 3: Block ciphers

First published as AS/NZS ISO/IEC 18033.3:2006.

COPYRIGHT

© Standards Australia/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher.

Jointly published by Standards Australia, GPO Box 476, Sydney, NSW 2001 and Standards New Zealand, Private Bag 2439, Wellington 6020

ISBN 0 7337 7596 9

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee IT-012, Information Systems, Security and Identification.

This Standard is identical with, and has been reproduced from ISO/IEC 18033-3:2005, *Information technology—Security techniques—Encryption algorithms—Part 3: Block ciphers*.

The objective of this Standard is to provide the Information Security programming and development community with clear guidance to the selection and implementation of appropriate encryption algorithms.

This Standard is Part 3 of AS/NZS ISO/IEC 18033, *Information technology—Security techniques—Encryption algorithms*, which when complete will consist of the following:

Part 1: General

Part 2: Asymmetric ciphers

Part 3: Block ciphers (this Standard)

Part 4: Stream ciphers

The terms ‘normative’ and ‘informative’ are used to define the application of the annex to which they apply. A normative annex is an integral part of a standard, whereas an informative annex is only for information and guidance.

As this Standard is reproduced from an international standard, the following applies:

- (a) Its number appears on the cover and title page while the international standard number appears only on the cover.
- (b) In the source text ‘this part of ISO/IEC 18033’ should read ‘this Australian/New Zealand Standard’.
- (c) A full point substitutes for a comma when referring to a decimal marker.

None of the references in the source document have been adopted as Australian or Australian/New Zealand Standards.

CONTENTS

	<i>Page</i>
1	Scope 1
2	Terms and definitions 1
3	Symbols 2
4	64-bit block ciphers 2
4.1	TDEA 3
4.1.1	TDEA encryption/decryption 3
4.1.2	TDEA keying options 3
4.2	MISTY1 3
4.2.1	MISTY1 encryption 3
4.2.2	MISTY1 decryption 4
4.2.3	MISTY1 functions 4
4.2.4	MISTY1 key schedule 9
4.3	CAST-128 10
4.3.1	CAST-128 encryption 10
4.3.2	CAST-128 decryption 10
4.3.3	CAST-128 functions 10
4.3.4	CAST-128 key schedule 17
5	128-bit block ciphers 20
5.1	AES 20
5.1.1	AES encryption 20
5.1.2	AES decryption 21
5.1.3	AES transformations 21
5.1.4	AES key schedule 26
5.2	Camellia 27
5.2.1	Camellia encryption 27
5.2.2	Camellia decryption 29
5.2.3	Camellia functions 32
5.2.4	Camellia key schedule 38
5.3	SEED 42
5.3.1	SEED encryption 42
5.3.2	SEED decryption 42
5.3.3	SEED functions 43
5.3.4	SEED key schedule 46
Annex A	(normative) Description of DES 47
A.1.	DES encryption 47
A.2.	DES decryption 47
A.3.	DES functions 47
A.3.1	Initial permutation IP 47
A.3.2	Inverse initial permutation IP^{-1} 48
A.3.3	Function f 49
A.3.4	Expansion permutation E 49
A.3.5	Permutation P 50
A.3.6	S-Boxes 50
A.4	DES key schedule (KS) 51
Annex B	(normative) ASN.1 module 53
Annex C	(informative) Algebraic forms of MISTY1 and Camellia S-boxes 55
C.1	MISTY1 S-boxes 55

C.1.1	MISTY1 S-box S_7	55
C.1.2	MISTY1 S-box S_9	55
C.2	Camellia S-box	55
Annex D	(informative) Test vectors	57
D.1	TDEA test vectors	57
D.1.1	TDEA encryption	57
D.1.2	DES encryption and decryption	58
D.2	MISTY1 test vectors	59
D.3	CAST-128 test vectors	60
D.4	AES test vectors	60
D.4.1	AES encryption	60
D.4.2	Key expansion example	61
D.4.3	Cipher example	63
D.5	Camellia test vectors	65
D.5.1	Camellia encryption	65
D.6	SEED test vectors	68
Annex E	(informative) Feature table	70
Bibliography		71

AUSTRALIAN/NEW ZEALAND STANDARD

Information technology — Security techniques — Encryption algorithms —

Part 3: Block ciphers

1 Scope

This part of ISO/IEC 18033 specifies block ciphers. A block cipher maps blocks of n bits to blocks of n bits, under the control of a key of k bits. A total of six different block ciphers are defined. They are categorized in Table 1.

Table 1. Block ciphers specified

Block length	Algorithm name (Clause #)	Key length
64 bits	TDEA (4.1)	128 or 192 bits
	MISTY1 (4.2)	128 bits
	CAST-128 (4.3) ¹	
128 bits	AES (5.1)	128, 192 or 256 bits
	Camellia (5.2)	128 bits
	SEED (5.3)	

The algorithms specified in this part of ISO/IEC 18033 have been assigned object identifiers in accordance with ISO/IEC 9834. The list of assigned object identifiers is given in Annex B. Any changes to the specification of the algorithms resulting in a change of functional behaviour will result in a change of the object identifier assigned to the algorithm.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1 block

string of bits of defined length. [ISO/IEC 18033-1:2004]

NOTE – In this part of ISO/IEC 18033, the block length is either 64 or 128 bits.

2.2 block cipher

symmetric encipherment system with the property that the encryption algorithm operates on a block of plaintext, i.e. a string of bits of a defined length, to yield a block of ciphertext. [ISO/IEC 18033-1:2004]

2.3 ciphertext

data which has been transformed to hide its information content. [ISO/IEC 9798-1:1997]

¹ The key length of the original version of CAST-128 is variable from 40 bits to 128 bits. This part of ISO/IEC 18033, however, specifies its use only with keys of 128 bits.

2.4**key**

sequence of symbols that controls the operation of a cryptographic transformation (e.g. encipherment, decipherment). [ISO/IEC 11770-1:1996]

NOTE – In all the ciphers specified in this part of ISO/IEC18033, keys consist of a sequence of bits.

2.5***n*-bit block cipher**

block cipher with the property that plaintext blocks and ciphertext blocks are *n* bits in length. [ISO/IEC 10116:1997]

2.6**plaintext**

unenciphered information. [ISO/IEC 9797-1:1999]

3 Symbols

n – plaintext/ciphertext bit length for a block cipher.

E_K – encryption function with key *K*.

D_K – decryption function with key *K*.

Nr – the number of rounds for the AES algorithm, which is 10, 12 or 14 for the choices of key length 128, 192 or 256 bits respectively.

Nk – the number of 32-bit words comprising a key for the AES algorithm, which is 4, 6 or 8 for the choices of key length 128, 192 or 256 bits respectively.

$\oplus$ – the bit-wise logical exclusive-OR operation on bit-strings, i.e., if *A*, *B* are strings of the same length then $A \oplus B$ is the string equal to the bit-wise logical exclusive-OR of *A* and *B*.

$\wedge$ – the bit-wise logical AND operation on bit-strings, i.e., if *A*, *B* are strings of the same length then $A \wedge B$ is the string equal to the bit-wise logical AND of *A* and *B*.

$\vee$ – the bit-wise logical OR operation on bit-strings, i.e., if *A*, *B* are strings of the same length then $A \vee B$ is the string equal to the bit-wise logical OR of *A* and *B*.

$\|$ – concatenation of bit strings.

$\bullet$ – finite field multiplication.

$\lll_i$ – the left circular rotation of the operand by *i* bits.

$\ggg_i$ – the right circular rotation of the operand by *i* bits.

$\overline{x}$ – the bitwise complement of *x*.

4 64-bit block ciphers

In this clause, three 64-bit block ciphers are specified; TDEA (or ‘Triple DES’) in clause 4.1, MISTY1 in clause 4.2 and CAST-128 in clause 4.3.

Users authorized to access data that has been enciphered must have the key that was used to encipher the data in order to decipher it. The algorithm is designed to encipher and decipher blocks of data consisting of 64 bits under control of a 128- (or 192-) bit key. Deciphering must be accomplished using the same key as for enciphering.

4.1 TDEA

The Triple Data Encryption Algorithm (TDEA) is a symmetric cipher that can process data blocks of 64 bits, using cipher keys with length of 128 (or 192) bits, of which 112 (or 168) bits can be chosen arbitrarily, and the rest may be used for error detection. The TDEA is commonly known as Triple DES (Data Encryption Standard).

A TDEA encryption/decryption operation is a compound operation of DES encryption and decryption operations, where the DES algorithm is specified in Annex A. A TDEA key consists of three DES keys.

4.1.1 TDEA encryption/decryption

The TDEA is defined in terms of DES operations, where E_K is the DES encryption operation for the key K and D_K is the DES decryption operation for the key K .

4.1.1.1 TDEA encryption

The transformation of a 64-bit block P into a 64-bit block C is defined as follows:

$$C = E_{K_3}(D_{K_2}(E_{K_1}(P))).$$

4.1.1.2 TDEA decryption

The transformation of a 64-bit block C into a 64-bit block P is defined as follows:

$$P = D_{K_1}(E_{K_2}(D_{K_3}(C))).$$

4.1.2 TDEA keying options ²

This part of ISO/IEC 18033 specifies the following keying options for TDEA. The TDEA key comprises the triple (K_1, K_2, K_3) .

1. Keying Option 1: K_1 , K_2 and K_3 are different DES keys;
2. Keying Option 2: K_1 and K_2 are different DES keys and $K_3 = K_1$.

NOTE – The option that $K_1 = K_2 = K_3$, the single-DES equivalent, is not recommended. Furthermore, the use of keying option 1 is preferred over keying option 2 since it provides additional security at the same performance level.

4.2 MISTY1

The MISTY1 algorithm is a symmetric block cipher that can process data blocks of 64 bits, using a cipher key with length of 128 bits.

4.2.1 MISTY1 encryption

The encryption operation is as shown in Figure 1. The transformation of a 64-bit block P into a 64-bit block C is defined as follows (KL , KO and KI are keys):

² The Keying Option 2 is approved only through the year 2009 by NIST.

$$(1) P = L_0 \parallel R_0$$

$$KL = KL_1 \parallel KL_2 \parallel \dots \parallel KL_{10}$$

$$KO = KO_1 \parallel KO_2 \parallel \dots \parallel KO_8$$

$$KI = KI_1 \parallel KI_2 \parallel \dots \parallel KI_8$$

(2) for $i = 1, 3, \dots, 7$ (increment in steps of 2 because the loop body consists of two rounds):

$$R_i = FL(L_{i-1}, KL_i)$$

$$L_i = FL(R_{i-1}, KL_{i+1}) \oplus FO(R_i, KO_i, KI_i)$$

$$L_{i+1} = R_i \oplus FO(L_i, KO_{i+1}, KI_{i+1})$$

$$R_{i+1} = L_i$$

for $i = 9$:

$$R_i = FL(L_{i-1}, KL_i)$$

$$L_i = FL(R_{i-1}, KL_{i+1})$$

$$(3) C = L_9 \parallel R_9$$

4.2.2 MISTY1 decryption

The decryption operation is as shown in Figure 2, and is identical in operation to encryption apart from the following two modifications.

- (1) All FL functions are replaced by their inverse functions FL^{-1} .
- (2) The order in which the subkeys are applied is reversed.

4.2.3 MISTY1 functions

The MISTY1 algorithm uses a number of functions, namely S_7 , S_9 , FI, FO, FL and FL^{-1} , which are now defined.

4.2.3.1 Function FL

The FL function is used in encryption only and is shown in Figure 3. The FL function is defined as follows (X and Y are data, KL is a key):

$$(1) X_{32} = X_L \parallel X_R, KL_i = KL_{iL} \parallel KL_{iR}$$

$$(2) Y_R = (X_L \wedge KL_{iL}) \oplus X_R$$

$$(3) Y_L = X_L \oplus (Y_R \vee KL_{iR})$$

$$(4) Y_{32} = Y_L \parallel Y_R$$

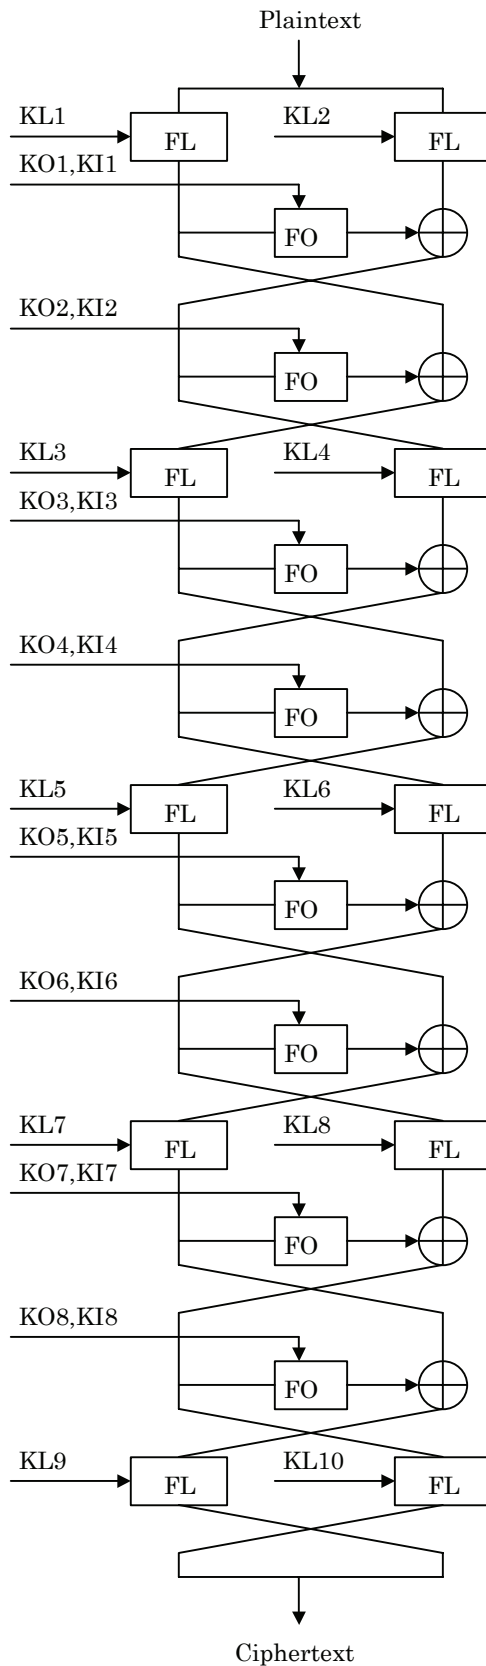


Figure 1. The Encryption Procedure

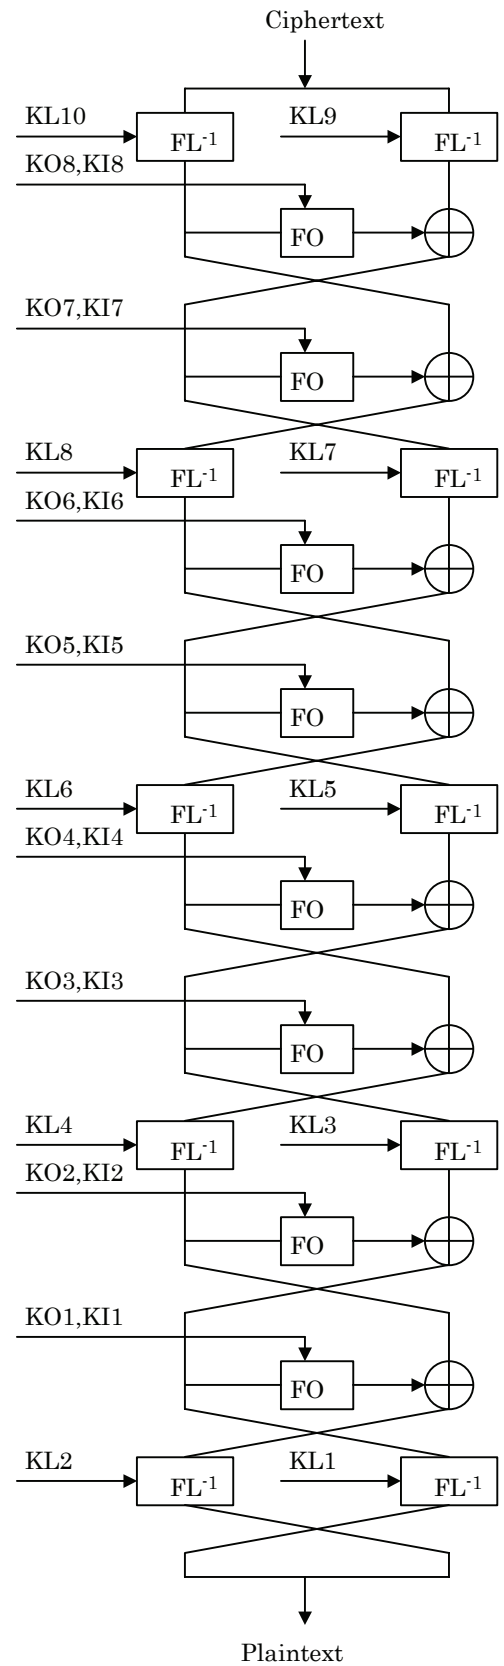


Figure 2. The Decryption Procedure

4.2.3.2 Function FL⁻¹

The FL⁻¹ function, which is the inverse to the FL function, is used in decryption only and is shown in Figure 4. The FL⁻¹ function is defined as follows (X and Y are data, KL is a key):

$$(1) Y_{32} = Y_L \parallel Y_R, KL_i = KL_{iL} \parallel KL_{iR}$$

$$(2) X_L = Y_L \oplus (Y_R \vee KL_{iR})$$

$$(3) X_R = (X_L \wedge KL_{iL}) \oplus Y_R$$

$$(4) X_{32} = X_L \parallel X_R$$

4.2.3.3 Function FO

The FO function is used in encryption and decryption, and is shown in Figure 5. The FO function is defined as follows (X and Y are data, KO and KI are keys):

$$(1) X_{32} = L_0 \parallel R_0$$

$$KO_i = KO_{i1} \parallel KO_{i2} \parallel KO_{i3} \parallel KO_{i4}, KI_i = KI_{i1} \parallel KI_{i2} \parallel KI_{i3}$$

$$(2) \text{ for } j = 1 \text{ to } 3 :$$

$$R_j = FI(L_{j-1} \oplus KO_{ij}, KI_{ij}) \oplus R_{j-1}$$

$$L_j = R_{j-1}$$

$$(3) Y_{32} = (L_3 \oplus KO_{i4}) \parallel R_3$$

4.2.3.4 Function FI

The FI function is used for encryption, decryption and the key schedule, and is shown in Figure 6, where Extnd is the operation zero-extended from 7 bits to 9 bits by the concatenation of two bits on the left side, and Trunc is the operation truncated by two bits on the left side. The FI function is defined as follows (X and Y are data, KI is a key):

$$(1) X_{16} = L_0 \text{ (9 bits)} \parallel R_0 \text{ (7 bits)}, KI_{ij} = KI_{ijL} \parallel KI_{ijR}$$

$$(2) R_1 = S_9(L_0) \oplus \text{Extnd}(R_0)$$

$$(3) L_1 = R_0$$

$$(4) R_2 = S_7(L_1) \oplus \text{Trunc}(R_1) \oplus KI_{ijL}$$

$$(5) L_2 = R_1 \oplus KI_{ijR}$$

$$(4) R_3 = S_9(L_2) \oplus \text{Extnd}(R_2)$$

$$(5) L_3 = R_2$$

$$(6) Y_{16} = L_3 \parallel R_3$$

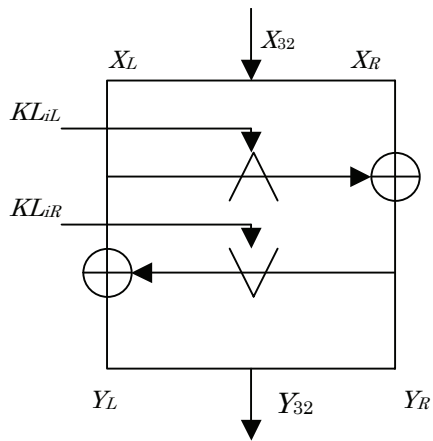


Figure 3. The Function FL

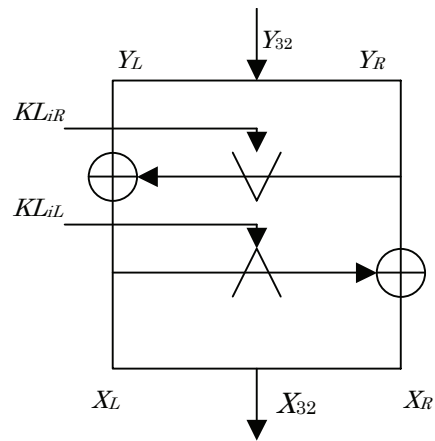
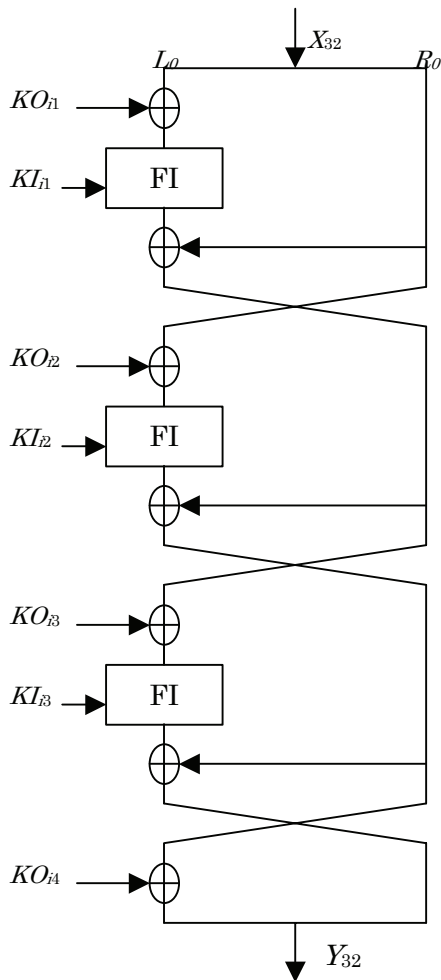
Figure 4. The Function FL^{-1} 

Figure 5. The Function FO

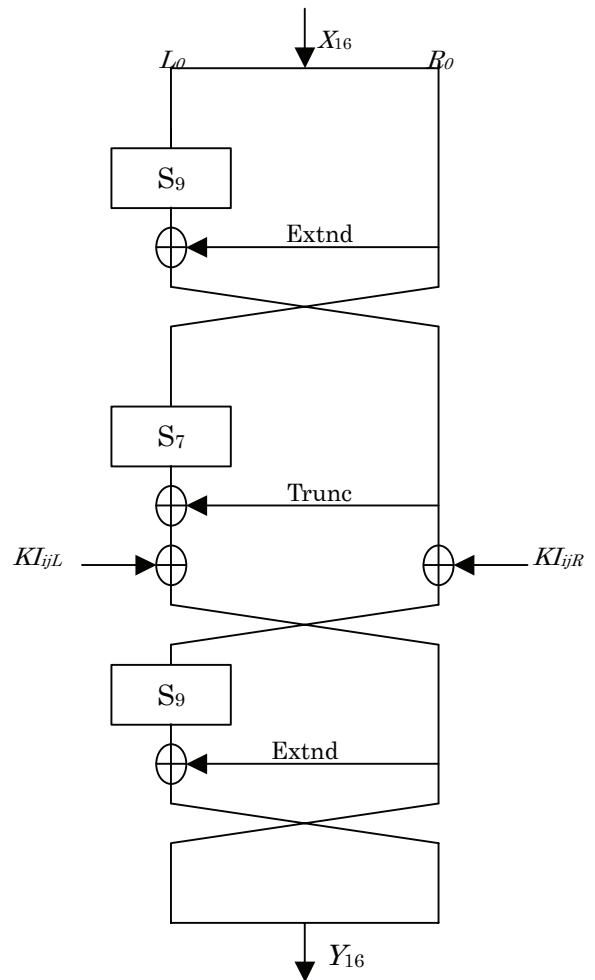


Figure 6. The Function FI

4.2.3.5 Lookup Tables S_7 and S_9

S_7 is a bijective lookup table that accepts a 7-bit input and yields a 7-bit output. S_9 is a bijective lookup table that accepts a 9-bit input and yields a 9-bit output. Tables 2 and 3 define these lookup tables in a hexadecimal form. S_7 and S_9 can be also described in a simple algebraic form over $GF(2)$ as shown in Clause C.1.

For example, if the input to S_7 is {53}, then the substitution value would be determined by the intersection of the row with index '5' and the column with index '3' in Table 2. This would result in S_7 having a value of {57}.

Table 2. S_7

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
0	1b	32	33	5a	3b	10	17	54	5b	1a	72	73	6b	2c	66	49
1	1f	24	13	6c	37	2e	3f	4a	5d	0f	40	56	25	51	1c	04
2	0b	46	20	0d	7b	35	44	42	2b	1e	41	14	4b	79	15	6f
3	0e	55	09	36	74	0c	67	53	28	0a	7e	38	02	07	60	29
4	19	12	65	2f	30	39	08	68	5f	78	2a	4c	64	45	75	3d
5	59	48	03	57	7c	4f	62	3c	1d	21	5e	27	6a	70	4d	3a
6	01	6d	6e	63	18	77	23	05	26	76	00	31	2d	7a	7f	61
7	50	22	11	06	47	16	52	4e	71	3e	69	43	34	5c	58	7d

Table 3. S_9

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00	1c3	0cb	153	19f	1e3	0e9	0fb	035	181	0b9	117	1eb	133	009	02d	0d3
01	0c7	14a	037	07e	0eb	164	193	1d8	0a3	11e	055	02c	01d	1a2	163	118
02	14b	152	1d2	00f	02b	030	13a	0e5	111	138	18e	063	0e3	0c8	1f4	01b
03	001	09d	0f8	1a0	16d	1f3	01c	146	07d	0d1	082	1ea	183	12d	0f4	19e
04	1d3	0dd	1e2	128	1e0	0ec	059	091	011	12f	026	0dc	0b0	18c	10f	1f7
05	0e7	16c	0b6	0f9	0d8	151	101	14c	103	0b8	154	12b	1ae	017	071	00c
06	047	058	07f	1a4	134	129	084	15d	19d	1b2	1a3	048	07c	051	1ca	023
07	13d	1a7	165	03b	042	0da	192	0ce	0c1	06b	09f	1f1	12c	184	0fa	196
08	1e1	169	17d	031	180	10a	094	1da	186	13e	11c	060	175	1cf	067	119
09	065	068	099	150	008	007	17c	0b7	024	019	0de	127	0db	0e4	1a9	052
0a	109	090	19c	1c1	028	1b3	135	16a	176	0df	1e5	188	0c5	16e	1de	1b1
0b	0c3	1df	036	0ee	1ee	0f0	093	049	09a	1b6	069	081	125	00b	05e	0b4
0c	149	1c7	174	03e	13b	1b7	08e	1c6	0ae	010	095	1ef	04e	0f2	1fd	085
0d	0fd	0f6	0a0	16f	083	08a	156	09b	13c	107	167	098	1d0	1e9	003	1fe
0e	0bd	122	089	0d2	18f	012	033	06a	142	0ed	170	11b	0e2	14f	158	131
0f	147	05d	113	1cd	079	161	1a5	179	09e	1b4	0cc	022	132	01a	0e8	004
10	187	1ed	197	039	1bf	1d7	027	18b	0c6	09c	0d0	14e	06c	034	1f2	06e
11	0ca	025	0ba	191	0fe	013	106	02f	1ad	172	1db	0c0	10b	1d6	0f5	1ec
12	10d	076	114	1ab	075	10c	1e4	159	054	11f	04b	0c4	1be	0f7	029	0a4
13	00e	1f0	077	04d	17a	086	08b	0b3	171	0bf	10e	104	097	15b	160	168
14	0d7	0bb	066	1ce	0fc	092	1c5	06f	016	04a	0a1	139	0af	0f1	190	00a
15	1aa	143	17b	056	18d	166	0d4	1fb	14d	194	19a	087	1f8	123	0a7	1b8

16	141 03c 1f9 140 02a 155 11a 1a1 198 0d5 126 1af 061 12e 157 1dc
17	072 18a 0aa 096 115 0ef 045 07b 08d 145 053 05f 178 0b2 02e 020
18	1d5 03f 1c9 1e7 1ac 044 038 014 0b1 16b 0ab 0b5 05a 182 1c8 1d4
19	018 177 064 0cf 06d 100 199 130 15a 005 120 1bb 1bd 0e0 04f 0d6
1a	13f 1c4 12a 015 006 0ff 19b 0a6 043 088 050 15f 1e8 121 073 17e
1b	0bc 0c2 0c9 173 189 1f5 074 1cc 1e6 1a8 195 01f 041 00d 1ba 032
1c	03d 1d1 080 0a8 057 1b9 162 148 0d9 105 062 07a 021 1ff 112 108
1d	1c0 0a9 11d 1b0 1a6 0cd 0f3 05c 102 05b 1d9 144 1f6 0ad 0a5 03a
1e	1cb 136 17f 046 0e1 01e 1dd 0e6 137 1fa 185 08c 08f 040 1b5 0be
1f	078 000 0ac 110 15e 124 002 1bc 0a2 0ea 070 1fc 116 15c 04c 1c2

4.2.4 MISTY1 key schedule

The key scheduling part accepts a 128-bit key K and yields another 128-bit subkey K' , as shown below. The figure of the key scheduling part is described in Figure 7.

The key scheduling operation is thus defined as follows.

$$(1) K = K_1 \parallel K_2 \parallel K_3 \parallel K_4 \parallel K_5 \parallel K_6 \parallel K_7 \parallel K_8$$

(2) for $i = 1$ to 7 :

$$K'_i = \text{FI}(K_i, K_{i+1})$$

$$(3) K'_8 = \text{FI}(K_8, K_1)$$

$$(4) K' = K'_1 \parallel K'_2 \parallel K'_3 \parallel K'_4 \parallel K'_5 \parallel K'_6 \parallel K'_7 \parallel K'_8$$

$$(5) KO_{i1} = K_i, KO_{i2} = K_{i+2}, KO_{i3} = K_{i+7}, KO_{i4} = K_{i+4}, KI_{i1} = K'_{i+5}, KI_{i2} = K'_{i+1}, KI_{i3} = K'_{i+3},$$

$$KL_{iL} = K_{(i+1)/2} \text{ (odd } i) \text{ or } K_{(i/2)+2} \text{ (even } i), KL_{iR} = K'_{(i+1)/2+6} \text{ (odd } i) \text{ or } K'_{(i/2)+4} \text{ (even } i)$$

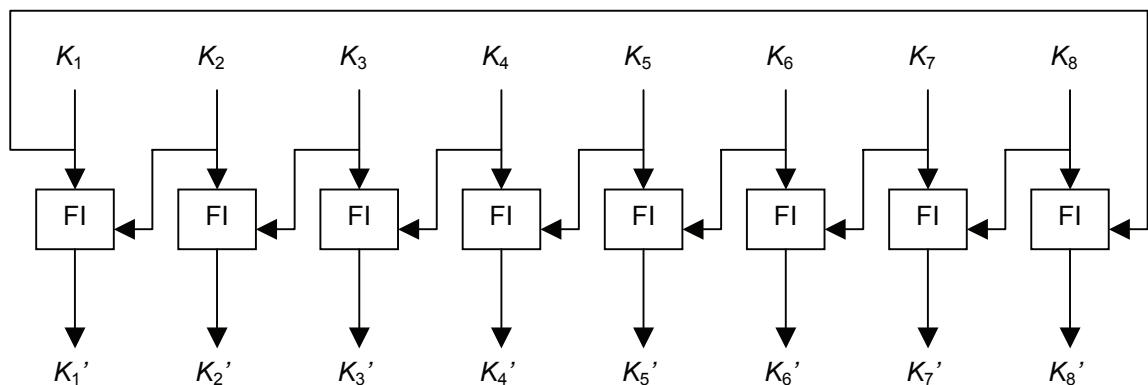


Figure 7. MISTY1 Key Scheduling

4.3 CAST-128

The CAST-128 algorithm is a symmetric block cipher that can process data blocks of 64 bits, using a cipher key with length of 128 bits under 16 rounds.

4.3.1 CAST-128 encryption

The transformation of a 64-bit block P into a 64-bit block C is defined as follows (Km and Kr are keys):

$$(1) P = L_0 \parallel R_0$$

(2) for $i = 1$ to 16:

$$L_i = R_{i-1}$$

$$R_i = L_{i-1} \oplus f(R_{i-1}, Km_i, Kr_i)$$

$$(3) C = R_{16} \parallel L_{16}$$

4.3.2 CAST-128 decryption

The decryption operation is identical to the encryption operation given above, except that the rounds (and therefore the subkey pairs) are used in reverse order to compute (L_0, R_0) from (R_{16}, L_{16}) .

4.3.3 CAST-128 functions

4.3.3.1 Pairs of Round Keys

CAST-128 uses a pair of subkeys per round: a 32-bit quantity Km is used as a "masking" key and a 5-bit quantity Kr is used as a "rotation" key.

4.3.3.2 f-functions

Three different round functions are used in the encryption and decryption operations, depending on the round number. The rounds are as follows (where " D " is the data input to the f function and " Ia " - " Id " are the most significant byte through least significant byte of I , respectively).

$$\text{Type 1: } I = ((Km_i + D) \lll Kr_i)$$

$$f = ((S1[Ia] \oplus S2[Ib]) - S3[Ic]) + S4[Id]$$

$$\text{Type 2: } I = ((Km_i \oplus D) \lll Kr_i)$$

$$f = ((S1[Ia] - S2[Ib]) + S3[Ic]) \oplus S4[Id]$$

$$\text{Type 3: } I = ((Km_i - D) \lll Kr_i)$$

$$f = ((S1[Ia] + S2[Ib]) \oplus S3[Ic]) - S4[Id]$$

Rounds 1, 4, 7, 10, 13, and 16 use f function Type 1.

Rounds 2, 5, 8, 11, and 14 use f function Type 2.

Rounds 3, 6, 9, 12, and 15 use f function Type 3.

4.3.3.3 Substitution Boxes

Eight substitution boxes are used: s-boxes S1, S2, S3, and S4 are round function s-boxes; S5, S6, S7, and S8 are key schedule s-boxes.

4.3.3.3.1 S-Box S1

```

30fb40d4 9fa0ff0b 6beccd2f 3f258c7a 1e213f2f 9c004dd3 6003e540 cf9fc949
bfd4af27 88bbdbb5 e2034090 98d09675 6e63a0e0 15c361d2 c2e7661d 22d4ff8e
28683b6f c07fd059 ff2379c8 775f50e2 43c340d3 df2f8656 887ca41a a2d2bd2d
a1c9e0d6 346c4819 61b76d87 22540f2f 2abe32e1 aa54166b 22568e3a a2d341d0
66db40c8 a784392f 004dff2f 2db9d2de 97943fac 4a97c1d8 527644b7 b5f437a7
b82cbaef d751d159 6ff7f0ed 5a097a1f 827b68d0 90ecf52e 22b0c054 bc8e5935
4b6d2f7f 50bb64a2 d2664910 bee5812d b7332290 e93b159f b48ee411 4bff345d
fd45c240 ad31973f c4f6d02e 55fc8165 d5b1caad a1ac2dae a2d4b76d c19b0c50
882240f2 0c6e4f38 a4e4bfd7 4f5ba272 564c1d2f c59c5319 b949e354 b04669fe
b1b6ab8a c71358dd 6385c545 110f935d 57538ad5 6a390493 e63d37e0 2a54f6b3
3a787d5f 6276a0b5 19a6fcdf 7a42206a 29f9d4d5 f61b1891 bb72275e aa508167
38901091 c6b505eb 84c7cb8c 2ad75a0f 874a1427 a2d1936b 2ad286af aa56d291
d7894360 425c750d 93b39e26 187184c9 6c00b32d 73e2bb14 a0bebc3c 54623779
64459eab 3f328b82 7718cf82 59a2cea6 04ee002e 89fe78e6 3fab0950 325ff6c2
81383f05 6963c5c8 76cb5ad6 d49974c9 ca180dcf 380782d5 c7fa5cf6 8ac31511
35e79e13 47da91d0 f40f9086 a7e2419e 31366241 051ef495 aa573b04 4a805d8d
548300d0 00322a3c bf64cddf ba57a68e 75c6372b 50afd341 a7c13275 915a0bf5
6b54bfab 2b0b1426 ab4cc9d7 449ccd82 f7fbf265 ab85c5f3 1b55db94 aad4e324
cfa4bd3f 2deaa3e2 9e204d02 c8bd25ac eadf55b3 d5bd9e98 e31231b2 2ad5ad6c
954329de adbe4528 d8710f69 aa51c90f aa786bf6 22513f1e aa51a79b 2ad344cc
7b5a41f0 d37cfbad 1b069505 41ece491 b4c332e6 032268d4 c9600acc ce387e6d
bf6bb16c 6a70fb78 0d03d9c9 d4df39de e01063da 4736f464 5ad328d8 b347cc96
75bb0fc3 98511bfb 4ffbcc35 b58bcf6a e11f0abc bfc5fe4a a70aec10 ac39570a
3f04442f 6188b153 e0397a2e 5727cb79 9ceb418f 1cacd68d 2ad37c96 0175cb9d
c69dff09 c75b65f0 d9db40d8 ec0e7779 4744ead4 b11c3274 dd24cb9e 7e1c54bd
f01144f9 d2240eb1 9675b3fd a3ac3755 d47c27af 51c85f4d 56907596 a5bb15e6
580304f0 ca042cf1 011a37ea 8dbfaadb 35ba3e4a 3526ffa0 c37b4d09 bc306ed9
98a52666 5648f725 ff5e569d 0ced63d0 7c63b2cf 700b45e1 d5ea50f1 85a92872
af1fbda7 d4234870 a7870bf3 2d3b4d79 42e04198 0cd0ede7 26470db8 f881814c
474d6ad7 7c0c5e5c d1231959 381b7298 f5d2f4db ab838653 6e2f1e23 83719c9e
bd91e046 9a56456e dc39200c 20c8c571 962bda1c e1e696ff b141ab08 7cca89b9
1a69e783 02cc4843 a2f7c579 429ef47d 427b169c 5ac9f049 dd8f0f00 5c8165bf

```

4.3.3.3.2 S-Box S2

```

1f201094 ef0ba75b 69e3cf7e 393f4380 fe61cf7a eec5207a 55889c94 72fc0651
ada7ef79 4e1d7235 d55a63ce de0436ba 99c430ef 5f0c0794 18dcdb7d a1d6eff3

```

a0b52f7b 59e83605 ee15b094 e9ffd909 dc440086 ef944459 ba83ccb3 e0c3cdfb
 d1da4181 3b092ab1 f997f1c1 a5e6cf7b 01420ddb e4e7ef5b 25a1ff41 e180f806
 1fc41080 179bee7a d37ac6a9 fe5830a4 98de8b7f 77e83f4e 79929269 24fa9f7b
 e113c85b acc40083 d7503525 f7ea615f 62143154 0d554b63 5d681121 c866c359
 3d63cf73 cee234c0 d4d87e87 5c672b21 071f6181 39f7627f 361e3084 e4eb573b
 602f64a4 d63acd9c 1bbc4635 9e81032d 2701f50c 99847ab4 a0e3df79 ba6cf38c
 10843094 2537a95e f46f6ffe a1ff3b1f 208cfb6a 8f458c74 d9e0a227 4ec73a34
 fc884f69 3e4de8df ef0e0088 3559648d 8a45388c 1d804366 721d9bfd a58684bb
 e8256333 844e8212 128d8098 fed33fb4 ce280ae1 27e19ba5 d5a6c252 e49754bd
 c5d655dd eb667064 77840b4d a1b6a801 84db26a9 e0b56714 21f043b7 e5d05860
 54f03084 066ff472 a31aa153 dadc4755 b5625dbf 68561be6 83ca6b94 2d6ed23b
 eccf01db a6d3d0ba b6803d5c af77a709 33b4a34c 397bc8d6 5ee22b95 5f0e5304
 81ed6f61 20e74364 b45e1378 de18639b 881ca122 b96726d1 8049a7e8 22b7da7b
 5e552d25 5272d237 79d2951c c60d894c 488cb402 1ba4fe5b a4b09f6b 1ca815cf
 a20c3005 8871df63 b9de2fcb 0cc6c9e9 0beeff53 e3214517 b4542835 9f63293c
 ee41e729 6e1d2d7c 50045286 1e6685f3 f33401c6 30a22c95 31a70850 60930f13
 73f98417 a1269859 ec645c44 52c877a9 cdff33a6 a02b1741 7cbad9a2 2180036f
 50d99c08 cb3f4861 c26bd765 64a3f6ab 80342676 25a75e7b e4e6d1fc 20c710e6
 cdf0b680 17844d3b 31eef84d 7e0824e4 2ccb49eb 846a3bae 8ff77888 ee5d60f6
 7af75673 2fdd5cdb a11631c1 30f66f43 b3faec54 157fd7fa ef8579cc d152de58
 db2ffd5e 8f32ce19 306af97a 02f03ef8 99319ad5 c242fa0f a7e3ebb0 c68e4906
 b8da230c 80823028 dcdef3c8 d35fb171 088a1bc8 bec0c560 61a3c9e8 bca8f54d
 c72feffa 22822e99 82c570b4 d8d94e89 8b1c34bc 301e16e6 273be979 b0fffeaa6
 61d9b8c6 00b24869 b7ffce3f 08dc283b 43daf65a f7e19798 7619b72f 8f1c9ba4
 dc8637a0 16a7d3b1 9fc393b7 a7136eeb c6bcc63e 1a513742 ef6828bc 520365d6
 2d6a77ab 3527ed4b 821fd216 095c6e2e db92f2fb 5eea29cb 145892f5 91584f7f
 5483697b 2667a8cc 85196048 8c4bacea 833860d4 0d23e0f9 6c387e8a 0ae6d249
 b284600c d835731d dcb1c647 ac4c56ea 3ebd81b3 230eabb0 6438bc87 f0b5b1fa
 8f5ea2b3 fc184642 0a036b7a 4fb089bd 649da589 a345415e 5c038323 3e5d3bb9
 43d79572 7e6dd07c 06dfdf1e 6c6cc4ef 7160a539 73bfbe70 83877605 4523ecf1

4.3.3.3 S-Box S3

8defc240 25fa5d9f eb903dbf e810c907 47607fff 369fe44b 8c1fc644 aececa90
 beb1f9bf eefbcaea e8cf1950 51df07ae 920e8806 f0ad0548 e13c8d83 927010d5
 11107d9f 07647db9 b2e3e4d4 3d4f285e b9afa820 fade82e0 a067268b 8272792e
 553fb2c0 489ae22b d4ef9794 125e3fbc 21fffcee 825b1bfd 9255c5ed 1257a240
 4e1a8302 bae07fff 528246e7 8e57140e 3373f7bf 8c9f8188 a6fc4ee8 c982b5a5
 a8c01db7 579fc264 67094f31 f2bd3f5f 40fff7c1 1fb78dfc 8e6bd2c1 437be59b
 99b03dbf b5dbc64b 638dc0e6 55819d99 a197c81c 4a012d6e c5884a28 ccc36f71
 b843c213 6c0743f1 8309893c 0feddd5f 2f7fe850 d7c07f7e 02507fbf 5afb9a04
 a747d2d0 1651192e af70bf3e 58c31380 5f98302e 727cc3c4 0a0fb402 0f7fef82
 8c96fdad 5d2c2aae 8ee99a49 50da88b8 8427f4a0 1eac5790 796fb449 8252dc15
 efbd7d9b a672597d ada840d8 45f54504 fa5d7403 e83ec305 4f91751a 925669c2
 23efe941 a903f12e 60270df2 0276e4b6 94fd6574 927985b2 8276dbcb 02778176
 f8af918d 4e48f79e 8f616ddf e29d840e 842f7d83 340ce5c8 96bbb682 93b4b148

ef303cab 984faf28 779faf9b 92dc560d 224d1e20 8437aa88 7d29dc96 2756d3dc
8b907cee b51fd240 e7c07ce3 e566b4a1 c3e9615e 3cf8209d 6094d1e3 cd9ca341
5c76460e 00ea983b d4d67881 fd47572c f76cedd9 bda8229c 127dadaa 438a074e
1f97c090 081bdb8a 93a07ebe b938ca15 97b03cff 3dc2c0f8 8d1ab2ec 64380e51
68cc7bfb d90f2788 12490181 5de5ffd4 dd7ef86a 76a2e214 b9a40368 925d958f
4b39fffa ba39aee9 a4ffd30b faf7933b 6d498623 193cbcfa 27627545 825cf47a
61bd8ba0 d11e42d1 cead04f4 127ea392 10428db7 8272a972 9270c4a8 127de50b
285ba1c8 3c62f44f 35c0eaa5 e805d231 428929fb b4fcdf82 4fb66a53 0e7dc15b
1f081fab 108618ae fcfd086d f9ff2889 694bcc11 236a5cae 12deca4d 2c3f8cc5
d2d02dfe f8ef5896 e4cf52da 95155b67 494a488c b9b6a80c 5c8f82bc 89d36b45
3a609437 ec00c9a9 44715253 0a874b49 d773bc40 7c34671c 02717ef6 4feb5536
a2d02fff d2bf60c4 d43f03c0 50b4ef6d 07478cd1 006e1888 a2e53f55 b9e6d4bc
a2048016 97573833 d7207d67 de0f8f3d 72f87b33 abcc4f33 7688c55d 7b00a6b0
947b0001 570075d2 f9bb88f8 8942019e 4264a5ff 856302e0 72dbd92b ee971b69
6ea22fde 5f08ae2b af7a616d e5c98767 cf1febd2 61efc8c2 f1ac2571 cc8239c2
67214cb8 b1e583d1 b7dc3e62 7f10bdce f90a5c38 0ff0443d 606e6dc6 60543a49
5727c148 2be98a1d 8ab41738 20e1be24 af96da0f 68458425 99833be5 600d457d
282f9350 8334b362 d91d1120 2b6d8da0 642b1e31 9c305a00 52bce688 1b03588a
f7baefd5 4142ed9c a4315c11 83323ec5 dfef4636 a133c501 e9d3531c ee353783

4.3.3.3.4 S-Box S4

9db30420 1fb6e9de a7be7bef d273a298 4a4f7bdb 64ad8c57 85510443 fa020ed1
7e287aff e60fb663 095f35a1 79ebf120 fd059d43 6497b7b1 f3641f63 241e4adf
28147f5f 4fa2b8cd c9430040 0cc32220 fdd30b30 c0a5374f 1d2d00d9 24147b15
ee4d111a 0fca5167 71ff904c 2d195ffe 1a05645f 0c13fefe 081b08ca 05170121
80530100 e83e5efe ac9af4f8 7fe72701 d2b8ee5f 06df4261 bb9e9b8a 7293ea25
ce84ffdf f5718801 3dd64b04 a26f263b 7ed48400 547eebe6 446d4ca0 6cf3d6f5
2649abdf aea0c7f5 36338cc1 503f7e93 d3772061 11b638e1 72500e03 f80eb2bb
abe0502e ec8d77de 57971e81 e14f6746 c9335400 6920318f 081dbb99 ffc304a5
4d351805 7f3d5ce3 a6c866c6 5d5bcc9a daec6fea 9f926f91 9f46222f 3991467d
a5bf6d8e 1143c44f 43958302 d0214eeb 022083b8 3fb6180c 18f8931e 281658e6
26486e3e 8bd78a70 7477e4c1 b506e07c f32d0a25 79098b02 e4eabb81 28123b23
69dead38 1574ca16 df871b62 211c40b7 a51a9ef9 0014377b 041e8ac8 09114003
bd59e4d2 e3d156d5 4fe876d5 2f91a340 557be8de 00eae4a7 0ce5c2ec 4db4bba6
e756bdfc dd3369ac ec17b035 06572327 99afc8b0 56c8c391 6b65811c 5e146119
6e85cb75 be07c002 c2325577 893ff4ec 5bbfc92d d0ec3b25 b7801ab7 8d6d3b24
20c763ef c366a5fc 9c382880 0ace3205 aac9548a eca1d7c7 041afa32 1d16625a
6701902c 9b757a54 31d477f7 9126b031 36cc6fdb c70b8b46 d9e66a48 56e55a79
026a4ceb 52437eff 2f8f76b4 0df980a5 8674cde3 edda04eb 17a9be04 2c18f4df
b7747f9d ab2af7b4 efc34d20 2e096b7c 1741a254 e5b6a035 213d42f6 2c1c7c26
61c2f50f 6552daf9 d2c231f8 25130f69 d8167fa2 0418f2c8 001a96a6 0d1526ab
63315c21 5e0a72ec 49bafefd 187908d9 8d0dbd86 311170a7 3e9b640c cc3e10d7
d5cad3b6 0caec388 f73001e1 6c728aff 71eae2a1 1f9af36e cfcdbd12f c1de8417

ac07be6b cb44a1d8 8b9b0f56 013988c3 b1c52fca b4be31cd d8782806 12a3a4e2
6f7de532 58fd7eb6 d01ee900 24adffc2 f4990fc5 9711aac5 001d7b95 82e5e7d2
109873f6 00613096 c32d9521 ada121ff 29908415 7fbb977f af9eb3db 29c9ed2a
5ce2a465 a730f32c d0aa3fe8 8a5cc091 d49e2ce7 0ce454a9 d60acd86 015f1919
77079103 dea03af6 78a8565e dee356df 21f05cbe 8b75e387 b3c50651 b8a5c3ef
d8eeb6d2 e523be77 c2154529 2f69efdf afe67afb f470c4b2 f3e0eb5b d6cc9876
39e4460c 1fda8538 1987832f ca007367 a99144f8 296b299e 492fc295 9266beab
b5676e69 9bd3ddda df7e052f db25701c 1b5e51ee f65324e6 6afce36c 0316cc04
8644213e b7dc59d0 7965291f ccd6fd43 41823979 932bcd6f b657c34d 4edfd282
7ae5290c 3cb9536b 851e20fe 9833557e 13ecf0b0 d3ffb372 3f85c5c1 0aef7ed2

4.3.3.3.5 S-Box S5

7ec90c04 2c6e74b9 9b0e66df a6337911 b86a7fff 1dd358f5 44dd9d44 1731167f
08fbf1fa e7f511cc d2051b00 735aba00 2ab722d8 386381cb acf6243a 69befd7a
e6a2e77f f0c720cd c4494816 ccf5c180 38851640 15b0a848 e68b18cb 4caadef
5f480a01 0412b2aa 259814fc 41d0efe2 4e40b48d 248eb6fb 8dba1cfe 41a99b02
1a550a04 ba8f65cb 7251f4e7 95a51725 c106ecd7 97a5980a c539b9aa 4d79fe6a
f2f3f763 68af8040 ed0c9e56 11b4958b e1eb5a88 8709e6b0 d7e07156 4e29fea7
6366e52d 02d1c000 c4ac8e05 9377f571 0c05372a 578535f2 2261be02 d642a0c9
df13a280 74b55bd2 682199c0 d421e5ec 53fb3ce8 c8adedb3 28a87fc9 3d959981
5c1ff900 fe38d399 0c4eff0b 062407ea aa2f4fb1 4fb96976 90c79505 b0a8a774
ef55a1ff e59ca2c2 a6b62d27 e66a4263 df65001f 0ec50966 dfdd55bc 29de0655
911e739a 17af8975 32c7911c 89f89468 0d01e980 524755f4 03b63cc9 0cc844b2
bcf3f0aa 87ac36e9 e53a7426 01b3d82b 1a9e7449 64ee2d7e cddbb1da 01c94910
b868bf80 0d26f3fd 9342ede7 04a5c284 636737b6 50f5b616 f24766e3 8eca36c1
136e05db fef18391 fb887a37 d6e7f7d4 c7fb7dc9 3063fcdf b6f589de ec2941da
26e46695 b7566419 f654efc5 d08d58b7 48925401 c1bacb7f e5ff550f b6083049
5bb5d0e8 87d72e5a ab6a6ee1 223a66ce c62bf3cd 9e0885f9 68cb3e47 086c010f
a21de820 d18b69de f3f65777 fa02c3f6 407edac3 cbb3d550 1793084d b0d70eba
0ab378d5 d951fb0c ded7da56 4124bbe4 94ca0b56 0f5755d1 e0e1e56e 6184b5be
580a249f 94f74bc0 e327888e 9f7b5561 c3dc0280 05687715 646c6bd7 44904db3
66b4f0a3 c0f1648a 697ed5af 49e92ff6 309e374f 2cb6356a 85808573 4991f840
76f0ae02 083be84d 28421c9a 44489406 736e4cb8 c1092910 8bc95fc6 7d869cf4
134f616f 2e77118d b31b2be1 aa90b472 3ca5d717 7d161bba 9cad9010 af462ba2
9fe459d2 45d34559 d9f2da13 dbc65487 f3e4f94e 176d486f 097c13ea 631da5c7
445f7382 175683f4 cdc66a97 70be0288 b3cdcf72 6e5dd2f3 20936079 459b80a5
be60e2db a9c23101 eba5315c 224e42f2 1c5c1572 f6721b2c 1ad2fff3 8c25404e
324ed72f 4067b7fd 0523138e 5ca3bc78 dc0fd66e 75922283 784d6b17 58ebb16e
44094f85 3f481d87 fcfeae7b 77b5ff76 8c2302bf aaf47556 5f46b02a 2b092801
3d38f5f7 0ca81f36 52af4a8a 66d5e7c0 df3b0874 95055110 1b5ad7a8 f61ed5ad
6cf6e479 20758184 d0cefa65 88f7be58 4a046826 0ff6f8f3 a09c7f70 5346aba0
5ce96c28 e176eda3 6bac307f 376829d2 85360fa9 17e3fe2a 24b79767 f5a96b20
d6cd2595 68ff1ebf 7555442c f19f06be f9e0659a eeb9491d 34010718 bb30cab8
e822fe15 88570983 750e6249 da627e55 5e76ffa8 b1534546 6d47de08 efe9e7d4

4.3.3.3.6 S-Box S6

f6fa8f9d 2cac6ce1 4ca34867 e2337f7c 95db08e7 016843b4 eced5cbc 325553ac
 bf9f0960 dfa1e2ed 83f0579d 63ed86b9 1ab6a6b8 de5ebe39 f38ff732 8989b138
 33f14961 c01937bd f506c6da e4625e7e a308ea99 4e23e33c 79cbd7cc 48a14367
 a3149619 fec94bd5 a114174a eaa01866 a084db2d 09a8486f a888614a 2900af98
 01665991 e1992863 c8f30c60 2e78ef3c d0d51932 cf0fec14 f7ca07d2 d0a82072
 fd41197e 9305a6b0 e86be3da 74bed3cd 372da53c 4c7f4448 dab5d440 6dba0ec3
 083919a7 9fbaeed9 49dbcfb0 4e670c53 5c3d9c01 64bdb941 2c0e636a ba7dd9cd
 ea6f7388 e70bc762 35f29adb 5c4cdd8d f0d48d8c b88153e2 08a19866 1ae2eac8
 284caf89 aa928223 9334be53 3b3a21bf 16434be3 9aea3906 efe8c36e f890cdd9
 80226dae c340a4a3 df7e9c09 a694a807 5b7c5ecc 221db3a6 9a69a02f 68818a54
 ceb2296f 53c0843a fe893655 25bfe68a b4628abc cf222ebf 25ac6f48 a9a99387
 53bddb65 e76ffbe7 e967fd78 0ba93563 8e342bc1 e8a11be9 4980740d c8087dfc
 8de4bf99 a11101a0 7fd37975 da5a26c0 e81f994f 9528cd89 fd339fed b87834bf
 5f04456d 22258698 c9c4c83b 2dc156be 4f628daa 57f55ec5 e2220abe d2916ebf
 4ec75b95 24f2c3c0 42d15d99 cd0d7fa0 7b6e27ff a8dc8af0 7345c106 f41e232f
 35162386 e6ea8926 3333b094 157ec6f2 372b74af 692573e4 e9a9d848 f3160289
 3a62ef1d a787e238 f3a5f676 74364853 20951063 4576698d b6fad407 592af950
 36f73523 4cfb6e87 7da4cec0 6c152daa cb0396a8 c50dfe5d fcd707ab 0921c42f
 89dff0bb 5fe2be78 448f4f33 754613c9 2b05d08d 48b9d585 dc049441 c8098f9b
 7dede786 c39a3373 42410005 6a091751 0ef3c8a6 890072d6 28207682 a9a9f7be
 bf32679d d45b5b75 b353fd00 cbb0e358 830f220a 1f8fb214 d372cf08 cc3c4a13
 8cf63166 061c87be 88c98f88 6062e397 47cf8e7a b6c85283 3cc2acfb 3fc06976
 4e8f0252 64d8314d da3870e3 1e665459 c10908f0 513021a5 6c5b68b7 822f8aa0
 3007cd3e 74719eef dc872681 073340d4 7e432fd9 0c5ec241 8809286c f592d891
 08a930f6 957ef305 b7fbffbd c266e96f 6fe4ac98 b173ecc0 bc60b42a 953498da
 fba1ae12 2d4bd736 0f25faab a4f3fceb e2969123 257f0c3d 9348af49 361400bc
 e8816f4a 3814f200 a3f94043 9c7a54c2 bc704f57 da41e7f9 c25ad33a 54f4a084
 b17f5505 59357cbe edbd15c8 7f97c5ab ba5ac7b5 b6f6deaf 3a479c3a 5302da25
 653d7e6a 54268d49 51a477ea 5017d55b d7d25d88 44136c76 0404a8c8 b8e5a121
 b81a928a 60ed5869 97c55b96 eaec991b 29935913 01fdb7f1 088e8dfa 9ab6f6f5
 3b4cbf9f 4a5de3ab e6051d35 a0e1d855 d36b4cf1 f544edeb b0e93524 bebb8fbd
 a2d762cf 49c92f54 38b5f331 7128a454 48392905 a65b1db8 851c97bd d675cf2f

4.3.3.3.7 S-Box S7

85e04019 332bf567 662dbfff cfc65693 2a8d7f6f ab9bc912 de6008a1 2028da1f
 0227bce7 4d642916 18fac300 50f18b82 2cb2cb11 b232e75c 4b3695f2 b28707de
 a05fbcf6 cd4181e9 e150210c e24ef1bd b168c381 fde4e789 5c79b0d8 1e8bfd43
 4d495001 38be4341 913cee1d 92a79c3f 089766be baeeadf4 1286becf b6eacb19
 2660c200 7565bde4 64241f7a 8248dca9 c3b3ad66 28136086 0bd8dfa8 356d1cf2
 107789be b3b2e9ce 0502aa8f 0bc0351e 166bf52a eb12ff82 e3486911 d34d7516
 4e7b3aff 5f43671b 9cf6e037 4981ac83 334266ce 8c9341b7 d0d854c0 cb3a6c88

47bc2829 4725ba37 a66ad22b 7ad61f1e 0c5cbafa 4437f107 b6e79962 42d2d816
0a961288 e1a5c06e 13749e67 72fc081a b1d139f7 f9583745 cf19df58 bec3f756
c06eba30 07211b24 45c28829 c95e317f bc8ec511 38bc46e9 c6e6fa14 bae8584a
ad4ebc46 468f508b 7829435f f124183b 821dba9f aff60ff4 ea2c4e6d 16e39264
92544a8b 009b4fc3 aba68ced 9ac96f78 06a5b79a b2856e6e 1aec3ca9 be838688
0e0804e9 55f1be56 e7e5363b b3a1f25d f7debb85 61fe033c 16746233 3c034c28
da6d0c74 79aac56c 3ce4e1ad 51f0c802 98f8f35a 1626a49f eed82b29 1d382fe3
0c4fb99a bb325778 3ec6d97b 6e77a6a9 cb658b5c d45230c7 2bd1408b 60c03eb7
b9068d78 a33754f4 f430c87d c8a71302 b96d8c32 ebd4e7be be8b9d2d 7979fb06
e7225308 8b75cf77 11ef8da4 e083c858 8d6b786f 5a6317a6 fa5cf7a0 5dda0033
f28ebfb0 f5b9c310 a0eac280 08b9767a a3d9d2b0 79d34217 021a718d 9ac6336a
2711fd60 438050e3 069908a8 3d7fedc4 826d2bef 4eeb8476 488dcf25 36c9d566
28e74e41 c2610aca 3d49a9cf bae3b9df b65f8de6 92aeaf64 3ac7d5e6 9ea80509
f22b017d a4173f70 dd1e16c3 15e0d7f9 50b1b887 2b9f4fd5 625aba82 6a017962
2ec01b9c 15488aa9 d716e740 40055a2c 93d29a22 e32dbf9a 058745b9 3453dc1e
d699296e 496cff6f 1c9f4986 dfe2ed07 b87242d1 19de7eae 053e561a 15ad6f8c
66626c1c 7154c24c ea082b2a 93eb2939 17dcb0f0 58d4f2ae 9ea294fb 52cf564c
9883fe66 2ec40581 763953c3 01d6692e d3a0c108 a1e7160e e4f2dfa6 693ed285
74904698 4c2b0edd 4f757656 5d393378 a132234f 3d321c5d c3f5e194 4b269301
c79f022f 3c997e7e 5e4f9504 3ffaafb8d 76f7ad0e 296693f4 3d1f6e6f c61e45be
d3b5ab34 f72bf9b7 1b0434c0 4e72b567 5592a33d b5229301 cfd2a87f 60aeb767
1814386b 30bcc33d 38a0c07d fd1606f2 c363519b 589dd390 5479f8e6 1cb8d647
97fd61a9 ea7759f4 2d57539d 569a58cf e84e63ad 462e1b78 6580f87e f3817914
91da55f4 40a230f3 d1988f35 b6e318d2 3ffa50bc 3d40f021 c3c0bdae 4958c24c
518f36b2 84b1d370 0fedce83 878ddada f2a279c7 94e01be8 90716f4b 954b8aa3

4.3.3.3.8 S-Box S8

e216300d bdddfffc a7ebdabd 35648095 7789f8b7 e6c1121b 0e241600 052ce8b5
11a9cfb0 e5952f11 ece7990a 9386d174 2a42931c 76e38111 b12def3a 37dddfc
de9adeb1 0a0cc32c be197029 84a00940 bb243a0f b4d137cf b44e79f0 049eedfd
0b15a15d 480d3168 8bbbde5a 669ded42 c7ece831 3f8f95e7 72df191b 7580330d
94074251 5c7dcdfa abbe6d63 aa402164 b301d40a 02e7d1ca 53571dae 7a3182a2
12a8ddec fdad335d 176f43e8 71fb46d4 38129022 ce949ad4 b84769ad 965bd862
82f3d055 66fb9767 15b80b4e 1d5b47a0 4cfde06f c28ec4b8 57e8726e 647a78fc
99865d44 608bd593 6c200e03 39dc5ff6 5d0b00a3 ae63aff2 7e8bd632 70108c0c
bbd35049 2998df04 980cf42a 9b6df491 9e7edd53 06918548 58cb7e07 3b74ef2e
522fffb1 d24708cc 1c7e27cd a4eb215b 3cf1d2e2 19b47a38 424f7618 35856039
9d17dee7 27eb35e6 c9aff67b 36baf5b8 09c467cd c18910b1 e11dbf7b 06cd1af8
7170c608 2d5e3354 d4de495a 64c6d006 bcc0c62c 3dd00db3 708f8f34 77d51b42
264f620f 24b8d2bf 15c1b79e 46a52564 f8d7e54e 3e378160 7895cda5 859c15a5
e6459788 c37bc75f db07ba0c 0676a3ab 7f229b1e 31842e7b 24259fd7 f8bef472
835ffcb8 6df4c1f2 96f5b195 fd0af0fc b0fe134c e2506d3d 4f9b12ea f215f225
a223736f 9fb4c428 25d04979 34c713f8 c4618187 ea7a6e98 7cd16efc 1436876c

```
f1544107 bedeee14 56e9af27 a04aa441 3cf7c899 92ecbae6 dd67016d 151682eb
a842eedf fd6a60b4 f1907b75 20e3030f 24d8c29e e139673b efa63fb8 71873054
b6f2cf3b 9f326442 cb15a4cc b01a4504 f1e47d8d 844a1be5 bae7dfdc 42cbda70
cd7dae0a 57e85b7a d53f5af6 20cf4d8c cea4d428 79d130a4 3486ebfb 33d3cddc
77853b53 37effcb5 c5068778 e580b3e6 4e68b8f4 c5c8b37e 0d809ea2 398feb7c
132a4f94 43b7950e 2fee7d1c 223613bd dd06caa2 37df932b c4248289 acf3ebc3
5715f6b7 ef3478dd f267616f c148cbe4 9052815e 5e410fab b48a2465 2eda7fa4
e87b40e4 e98ea084 5889e9e1 efd390fc dd07d35b db485694 38d7e5b2 57720101
730edebc 5b643113 94917e4f 503c2fba 646f1282 7523d24a e0779695 f9c17a8f
7a5b2121 d187b896 29263a4d ba510cdf 81f47c9f ad1163ed ea7b5965 1a00726e
11403092 00da6d77 4a0cdd61 ad1f4603 605bdfb0 9eedc364 22ebe6a8 cee7d28a
a0e736a0 5564a6b9 10853209 c7eb8f37 2de705ca 8951570f df09822b bd691a6c
aa12e4f2 87451c0f e0f6a27a 3ada4819 4cf1764f 0d771c2b 67cdb156 350d8384
5938fa0f 42399ef3 36997b07 0e84093d 4aa93e61 8360d87b 1fa98b0c 1149382c
e97625a5 0614d1b7 0e25244b 0c768347 589e8d82 0d2059d1 a466bb1e f8da0a82
04f19130 ba6e4ec0 99265164 1ee7230d 50b2ad80 eaee6801 8db2a283 ea8bf59e
```

4.3.4 CAST-128 key schedule

Let the 128-bit key be $x_0x_1x_2x_3x_4x_5x_6x_7x_8x_9x_{Ax}x_{Bx}x_{Cx}x_{Dx}x_{Ex}x_{Fx}$, where x_0 represents the most significant byte and x_F represents the least significant byte, and $z_0 \dots z_F$ be intermediate (temporary) bytes.

The subkeys are formed from the key $x_0x_1x_2x_3x_4x_5x_6x_7x_8x_9x_{Ax}x_{Bx}x_{Cx}x_{Dx}x_{Ex}x_{Fx}$ as follows.

$$z_0z_1z_2z_3 = x_0x_1x_2x_3 \oplus S_5[x_D] \oplus S_6[x_F] \oplus S_7[x_C] \oplus S_8[x_E] \oplus S_7[x_8]$$

$$z_4z_5z_6z_7 = x_8x_9x_{Ax}x_B \oplus S_5[z_0] \oplus S_6[z_2] \oplus S_7[z_1] \oplus S_8[z_3] \oplus S_8[x_A]$$

$$z_8z_9z_{Az}z_B = x_{Cx}x_{Dx}x_{Ex}x_F \oplus S_5[z_7] \oplus S_6[z_6] \oplus S_7[z_5] \oplus S_8[z_4] \oplus S_5[x_9]$$

$$z_Cz_Dz_Ez_F = x_4x_5x_6x_7 \oplus S_5[z_A] \oplus S_6[z_9] \oplus S_7[z_B] \oplus S_8[z_8] \oplus S_6[x_B]$$

$$K_1 = S_5[z_8] \oplus S_6[z_9] \oplus S_7[z_7] \oplus S_8[z_6] \oplus S_5[z_2]$$

$$K_2 = S_5[z_A] \oplus S_6[z_B] \oplus S_7[z_5] \oplus S_8[z_4] \oplus S_6[z_6]$$

$$K_3 = S_5[z_C] \oplus S_6[z_D] \oplus S_7[z_3] \oplus S_8[z_2] \oplus S_7[z_9]$$

$$K_4 = S_5[z_E] \oplus S_6[z_F] \oplus S_7[z_1] \oplus S_8[z_0] \oplus S_8[z_C]$$

$$x_0x_1x_2x_3 = z_8z_9z_{Az}z_B \oplus S_5[z_5] \oplus S_6[z_7] \oplus S_7[z_4] \oplus S_8[z_6] \oplus S_7[z_0]$$

$$x_4x_5x_6x_7 = z_0z_1z_2z_3 \oplus S_5[x_0] \oplus S_6[x_2] \oplus S_7[x_1] \oplus S_8[x_3] \oplus S_8[z_2]$$

$$x_8x_9x_{Ax}x_B = z_4z_5z_6z_7 \oplus S_5[x_7] \oplus S_6[x_6] \oplus S_7[x_5] \oplus S_8[x_4] \oplus S_5[z_1]$$

$$x_{Cx}x_{Dx}x_{Ex}x_F = z_Cz_Dz_Ez_F \oplus S_5[x_A] \oplus S_6[x_9] \oplus S_7[x_B] \oplus S_8[x_8] \oplus S_6[z_3]$$

$$K_5 = S_5[x_3] \oplus S_6[x_2] \oplus S_7[x_C] \oplus S_8[x_D] \oplus S_5[x_8]$$

$$K_6 = S_5[x_1] \oplus S_6[x_0] \oplus S_7[x_E] \oplus S_8[x_F] \oplus S_6[x_D]$$

$$K7 = S5[x7] \oplus S6[x6] \oplus S7[x8] \oplus S8[x9] \oplus S7[x3]$$

$$K8 = S5[x5] \oplus S6[x4] \oplus S7[xA] \oplus S8[xB] \oplus S8[x7]$$

$$z0z1z2z3 = x0x1x2x3 \oplus S5[xD] \oplus S6[xF] \oplus S7[xC] \oplus S8[xE] \oplus S7[x8]$$

$$z4z5z6z7 = x8x9xAxB \oplus S5[z0] \oplus S6[z2] \oplus S7[z1] \oplus S8[z3] \oplus S8[xA]$$

$$z8z9zAzB = xCxDxExF \oplus S5[z7] \oplus S6[z6] \oplus S7[z5] \oplus S8[z4] \oplus S5[x9]$$

$$zCzDzEzF = x4x5x6x7 \oplus S5[zA] \oplus S6[z9] \oplus S7[zB] \oplus S8[z8] \oplus S6[xB]$$

$$K9 = S5[z3] \oplus S6[z2] \oplus S7[zC] \oplus S8[zD] \oplus S5[z9]$$

$$K10 = S5[z1] \oplus S6[z0] \oplus S7[zE] \oplus S8[zF] \oplus S6[zC]$$

$$K11 = S5[z7] \oplus S6[z6] \oplus S7[z8] \oplus S8[z9] \oplus S7[z2]$$

$$K12 = S5[z5] \oplus S6[z4] \oplus S7[zA] \oplus S8[zB] \oplus S8[z6]$$

$$x0x1x2x3 = z8z9zAzB \oplus S5[z5] \oplus S6[z7] \oplus S7[z4] \oplus S8[z6] \oplus S7[z0]$$

$$x4x5x6x7 = z0z1z2z3 \oplus S5[x0] \oplus S6[x2] \oplus S7[x1] \oplus S8[x3] \oplus S8[z2]$$

$$x8x9xAxB = z4z5z6z7 \oplus S5[x7] \oplus S6[x6] \oplus S7[x5] \oplus S8[x4] \oplus S5[z1]$$

$$xCxDxExF = zCzDzEzF \oplus S5[xA] \oplus S6[x9] \oplus S7[xB] \oplus S8[x8] \oplus S6[z3]$$

$$K13 = S5[x8] \oplus S6[x9] \oplus S7[x7] \oplus S8[x6] \oplus S5[x3]$$

$$K14 = S5[xA] \oplus S6[xB] \oplus S7[x5] \oplus S8[x4] \oplus S6[x7]$$

$$K15 = S5[xC] \oplus S6[xD] \oplus S7[x3] \oplus S8[x2] \oplus S7[x8]$$

$$K16 = S5[xE] \oplus S6[xF] \oplus S7[x1] \oplus S8[x0] \oplus S8[xD]$$

[The remaining half is identical to what is given above, carrying on from the last created x0..xF to generate keys K17 - K32.]

$$z0z1z2z3 = x0x1x2x3 \oplus S5[xD] \oplus S6[xF] \oplus S7[xC] \oplus S8[xE] \oplus S7[x8]$$

$$z4z5z6z7 = x8x9xAxB \oplus S5[z0] \oplus S6[z2] \oplus S7[z1] \oplus S8[z3] \oplus S8[xA]$$

$$z8z9zAzB = xCxDxExF \oplus S5[z7] \oplus S6[z6] \oplus S7[z5] \oplus S8[z4] \oplus S5[x9]$$

$$zCzDzEzF = x4x5x6x7 \oplus S5[zA] \oplus S6[z9] \oplus S7[zB] \oplus S8[z8] \oplus S6[xB]$$

$$K17 = S5[z8] \oplus S6[z9] \oplus S7[z7] \oplus S8[z6] \oplus S5[z2]$$

$$K18 = S5[zA] \oplus S6[zB] \oplus S7[z5] \oplus S8[z4] \oplus S6[z6]$$

$$K19 = S5[zC] \oplus S6[zD] \oplus S7[z3] \oplus S8[z2] \oplus S7[z9]$$

$$K20 = S5[zE] \oplus S6[zF] \oplus S7[z1] \oplus S8[z0] \oplus S8[zC]$$

$$x0x1x2x3 = z8z9zAzB \oplus S5[z5] \oplus S6[z7] \oplus S7[z4] \oplus S8[z6] \oplus S7[z0]$$

$$x_4x_5x_6x_7 = z_0z_1z_2z_3 \oplus S_5[x_0] \oplus S_6[x_2] \oplus S_7[x_1] \oplus S_8[x_3] \oplus S_8[z_2]$$

$$x_8x_9x_{Ax}x_B = z_4z_5z_6z_7 \oplus S_5[x_7] \oplus S_6[x_6] \oplus S_7[x_5] \oplus S_8[x_4] \oplus S_5[z_1]$$

$$x_{Cx}x_{Dx}x_{Ex}x_F = z_{Cz}z_{Dz}z_{Ez}z_F \oplus S_5[x_A] \oplus S_6[x_9] \oplus S_7[x_B] \oplus S_8[x_8] \oplus S_6[z_3]$$

$$K_{21} = S_5[x_3] \oplus S_6[x_2] \oplus S_7[x_C] \oplus S_8[x_D] \oplus S_5[x_8]$$

$$K_{22} = S_5[x_1] \oplus S_6[x_0] \oplus S_7[x_E] \oplus S_8[x_F] \oplus S_6[x_D]$$

$$K_{23} = S_5[x_7] \oplus S_6[x_6] \oplus S_7[x_8] \oplus S_8[x_9] \oplus S_7[x_3]$$

$$K_{24} = S_5[x_5] \oplus S_6[x_4] \oplus S_7[x_A] \oplus S_8[x_B] \oplus S_8[x_7]$$

$$z_0z_1z_2z_3 = x_0x_1x_2x_3 \oplus S_5[x_D] \oplus S_6[x_F] \oplus S_7[x_C] \oplus S_8[x_E] \oplus S_7[x_8]$$

$$z_4z_5z_6z_7 = x_8x_9x_{Ax}x_B \oplus S_5[z_0] \oplus S_6[z_2] \oplus S_7[z_1] \oplus S_8[z_3] \oplus S_8[x_A]$$

$$z_8z_9z_{Az}z_B = x_{Cx}x_{Dx}x_{Ex}x_F \oplus S_5[z_7] \oplus S_6[z_6] \oplus S_7[z_5] \oplus S_8[z_4] \oplus S_5[x_9]$$

$$z_{Cz}z_{Dz}z_{Ez}z_F = x_4x_5x_6x_7 \oplus S_5[z_A] \oplus S_6[z_9] \oplus S_7[z_B] \oplus S_8[z_8] \oplus S_6[x_B]$$

$$K_{25} = S_5[z_3] \oplus S_6[z_2] \oplus S_7[z_C] \oplus S_8[z_D] \oplus S_5[z_9]$$

$$K_{26} = S_5[z_1] \oplus S_6[z_0] \oplus S_7[z_E] \oplus S_8[z_F] \oplus S_6[z_C]$$

$$K_{27} = S_5[z_7] \oplus S_6[z_6] \oplus S_7[z_8] \oplus S_8[z_9] \oplus S_7[z_2]$$

$$K_{28} = S_5[z_5] \oplus S_6[z_4] \oplus S_7[z_A] \oplus S_8[z_B] \oplus S_8[z_6]$$

$$x_0x_1x_2x_3 = z_8z_9z_{Az}z_B \oplus S_5[z_5] \oplus S_6[z_7] \oplus S_7[z_4] \oplus S_8[z_6] \oplus S_7[z_0]$$

$$x_4x_5x_6x_7 = z_0z_1z_2z_3 \oplus S_5[x_0] \oplus S_6[x_2] \oplus S_7[x_1] \oplus S_8[x_3] \oplus S_8[z_2]$$

$$x_8x_9x_{Ax}x_B = z_4z_5z_6z_7 \oplus S_5[x_7] \oplus S_6[x_6] \oplus S_7[x_5] \oplus S_8[x_4] \oplus S_5[z_1]$$

$$x_{Cx}x_{Dx}x_{Ex}x_F = z_{Cz}z_{Dz}z_{Ez}z_F \oplus S_5[x_A] \oplus S_6[x_9] \oplus S_7[x_B] \oplus S_8[x_8] \oplus S_6[z_3]$$

$$K_{29} = S_5[x_8] \oplus S_6[x_9] \oplus S_7[x_7] \oplus S_8[x_6] \oplus S_5[x_3]$$

$$K_{30} = S_5[x_A] \oplus S_6[x_B] \oplus S_7[x_5] \oplus S_8[x_4] \oplus S_6[x_7]$$

$$K_{31} = S_5[x_C] \oplus S_6[x_D] \oplus S_7[x_3] \oplus S_8[x_2] \oplus S_7[x_8]$$

$$K_{32} = S_5[x_E] \oplus S_6[x_F] \oplus S_7[x_1] \oplus S_8[x_0] \oplus S_8[x_D]$$

The following step is used to create masking subkeys and rotation subkeys.

Let $Km_1, \dots, Km_{16}$ be 32-bit masking subkeys (one per round).

Let $Kr_1, \dots, Kr_{16}$ be 32-bit rotation subkeys (one per round); only the least significant 5 bits are used in each round.

for $i = 1$ to 16:

$$Km_i = K_i$$

$$Kr_i = K_{16+i}$$