

Australian/New Zealand Standard™

**Information technology—Learning,
education, and training—Content
packaging**

Part 2: XML binding



AS/NZS ISO/IEC 12785.2:2013

This Joint Australian/New Zealand Standard was prepared by Joint Technical Committee IT-019, Information and Documentation, Information Technology—Learning, Education, Training and Research. It was approved on behalf of the Council of Standards Australia on 19 April 2013 and on behalf of the Council of Standards New Zealand on 8 April 2013.

This Standard was published on 13 May 2013.

The following are represented on Committee IT-019:

Australian Computer Society
Australian Library and Information Association
Council of Australian University Librarians
CSIRO Information and Communication Technologies Centre
Department of Education and Training, NSW
Education Services Australia
Institute of Metadata Management
La Trobe University
Macquarie E-Learning Centre of Excellence
National Library of Australia
National Library of New Zealand
Tertiary Library Networks
University of New South Wales
Victoria University
Waikato Institute of Technology

Additional Interests:

Sybis

Keeping Standards up-to-date

Standards are living documents which reflect progress in science, technology and systems. To maintain their currency, all Standards are periodically reviewed, and new editions are published. Between editions, amendments may be issued. Standards may also be withdrawn. It is important that readers assure themselves they are using a current Standard, which should include any amendments which may have been published since the Standard was purchased.

Detailed information about joint Australian/New Zealand Standards can be found by visiting the Standards Web Shop at www.saiglobal.com.au or Standards New Zealand web site at www.standards.co.nz and looking up the relevant Standard in the on-line catalogue.

For more frequent listings or notification of revisions, amendments and withdrawals, Standards Australia and Standards New Zealand offer a number of update options. For information about these services, users should contact their respective national Standards organization.

We also welcome suggestions for improvement in our Standards, and especially encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Please address your comments to the Chief Executive of either Standards Australia or Standards New Zealand at the address shown on the back cover.

This Standard was issued in draft form for comment as DR AS/NZS ISO/IEC 12785.2

Australian/New Zealand Standard™

Information technology—Learning, education, and training—Content packaging

Part 2: XML binding

First published as AS/NZS ISO/IEC 12785.2:2013.

COPYRIGHT

© Standards Australia Limited/Standards New Zealand

All rights are reserved. No part of this work may be reproduced or copied in any form or by any means, electronic or mechanical, including photocopying, without the written permission of the publisher, unless otherwise permitted under the Copyright Act 1968 (Australia) or the Copyright Act 1994 (New Zealand).

Jointly published by SAI Global Limited under licence from Standards Australia Limited, GPO Box 476, Sydney, NSW 2001 and by Standards New Zealand, Private Bag 2439, Wellington 6140.

ISBN 978 1 74342 424 7

PREFACE

This Standard was prepared by the Joint Standards Australia/Standards New Zealand Committee IT-019, Information and Documentation, Information Technology—Learning, Education, Training and Research.

The objectives of this Standard are to specify how to represent the ISO/IEC 12785-2 information model in XML and detail each element binding of the content packaging XML schema.

This Standard is identical with, and has been reproduced from ISO/IEC 12785-2:2011, *Information technology—Learning, education, and training—Content packaging, Part 2: XML binding*.

As this Standard is reproduced from an International Standard, the following applies:

- (a) In the source text ‘this part of ISO/IEC 12785’ should read ‘this Australian/New Zealand Standard’.
- (b) A full point substitutes for a comma when referring to a decimal marker.

None of the normative references in the source document have been adopted as Australian or Australian/New Zealand Standards.

The term ‘informative’ has been used in this Standard to define the application of the annex to which it applies. An ‘informative’ annex is only for information and guidance.

CONTENTS

1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Abbreviated terms	3
5	XML schema documentation	4
5.1	Core content packaging binding description	4
5.1.1	Schema document properties	4
5.1.2	Global declarations	5
5.1.2.1	Element: manifest	5
5.1.3	Global definitions	6
5.1.3.1	Complex Type: Dependency.Type	6
5.1.3.2	Complex Type: File.Type	7
5.1.3.3	Complex Type: Item.Type	8
5.1.3.4	Complex Type: Manifest.Type	10
5.1.3.5	Complex Type: ManifestMetadata.Type	11
5.1.3.6	Complex Type: Metadata.Type	12
5.1.3.7	Complex Type: Organization.Type	13
5.1.3.8	Complex Type: Organizations.Type	15
5.1.3.9	Complex Type: Resource.Type	16
5.1.3.10	Complex Type: Resources.Type	17
5.1.3.11	Model Group: grpStrict.any	18
5.2	Content packaging extension binding description	19
5.2.1	Schema document properties	19
5.2.2	Global declarations	20
5.2.2.1	Element: ipointer	20
5.2.2.2	Element: lingualTitle	21
5.2.2.3	Element: variant	21
5.2.3	Global definitions	22
5.2.3.1	Complex Type: IPointer.Type	22
5.2.3.2	Complex Type: LingualTitle.Type	24
5.2.3.3	Complex Type: Metadata.Type	24
5.2.3.4	Complex Type: Variant.Type	25
5.2.3.5	Model Group: grpStrict.any	26
6	Using schematron	27
Annex A (informative)	Document Provenance	28
Annex B (informative)	Listing of the XSDs	29
Bibliography		30

INTRODUCTION

This part of ISO/IEC 12785 will be used as the basis for the production of the following documents:

- ISO/IEC 12785-3 (*Best practice and implementation guide*);
- Content Packaging XML XSD.¹⁾

This part of ISO/IEC 12785 details how the ISO/IEC 12785-1 information model should be represented using XML schema. The content packaging binding is contained in two XML schemas and two vocabulary files. The vocabulary files are instances of the IMS Vocabulary Definition Exchange specification. ISO/IEC 12785-3 provides non-normative guidance on how to use the binding and information model. For a conceptual overview of ISO/IEC 12785, see ISO/IEC 12785-1. For a discussion of potential applications, see ISO/IEC 12785-3. Conformance to ISO/IEC 12785 is addressed within ISO/IEC 12785-1.

1) This XML schema definition can be accessed from: <http://www.msglobal.org/content/packaging/index.html>.

AUSTRALIAN/NEW ZEALAND STANDARD

**Information technology—Learning, education, and training—
Content packaging****Part 2:
XML binding****1 Scope**

This part of ISO/IEC 12785 specifies how to represent the ISO/IEC 12785-1 information model in XML, and details each element binding of the content packaging XML schema.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 12785-1:2009, *Information technology — Learning, education, and training — Content packaging — Part 1: Information model*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1**binding****XML data binding**

means of representing the information in an XML document

NOTE See XML data binding of Wikipedia: http://en.wikipedia.org/wiki/XML_data_binding (retrieved November 18, 2009).

3.2**control file**

single computer file that governs the binding of the Content Packaging Information Model to make it suitable for machine processing

NOTE A software component can refer to a control file when assessing the validity of a bound instance of the information model or to guide the creation of a bound instance of the information model.

EXAMPLE A file containing an XML schema can be used as a control file for an XML binding of a manifest.

3.3

content

individual file or multiple files usable in learning, education and training

NOTE 1 A logical unit of usable (and reusable) information can be described by a logical package.

NOTE 2 logical package can contain one or more units of content.

3.4

logical package

representation of one or more units of usable (and reusable) content

NOTE A logical package encompasses the full set of components described by the manifest and its child manifests, including the local components and the remote components included by reference.

[ISO/IEC 12785-1:2009]

3.5

namespace

XML namespace identified by a URI reference

NOTE Namespace in Content Packaging follows W3C recommendation *Namespaces in XML 1.0 (Second Edition)*.

[ISO/IEC 12785-1:2009]

3.6

manifest

description of files and any logical relationships between them, contained or referenced in a content package

3.7

metadata

⟨content packaging⟩ descriptive information about logical packages, logical organizations, content and files

NOTE 1 Metadata can be assigned to any of the core structures within the logical package, including the manifest.

NOTE 2 Any binding of a metadata object is permitted. Each object of metadata can be local or remote.

[ISO/IEC 12785-1:2009]

3.8

organization

logical relationships, such as a hierarchical tree, among unit of content

NOTE More than one logical organization can be described in a manifest.

3.9

package

unit of usable (and reusable) content

NOTE 1 This can be part of a learning course that has instructional relevance outside of a content aggregation and can be delivered independently, as an entire learning course or as a collection of learning courses.

NOTE 2 A package is able to stand-alone; that is, it contains all the information needed to use the contents for learning, education, and training when it has been unpacked.

3.10

resource

⟨content packaging⟩ one URL entry point and zero or more references to files that are required before the content is launched

NOTE The files described by a resource can be local or remote.

3.11**schema****XML Schema**

description of a class of XML documents, expressed in terms of constraints on the structure and content of those documents

NOTE 1 For more information see <http://www.w3c.org/XML/Schema>.

NOTE 2 XML Schema in Content Packaging follows W3C recommendation *XML Schema*.

NOTE 3 The definition refers to the concept of a schema in an XML context, as well as a specific language for creating such schemas: the W3C XML Schema. The "IMS Content Packaging XML XSD" is an application of the W3C XML Schema language.

3.12**unit of content**

file or grouping of files which can be represented within a manifest

3.13**XML validation**

process whereby documents written in XML (eXtensible Markup Language) are verified against the defined structure

NOTE Strict validation in XML means that it must follow the rules dictated by an XML schema.

4 Abbreviated terms

CPIM	Content Packaging Information Model
I-BAT	IMS Binding Auto-generation Tool-kit
LET	Learning, Education, and Training
MDA	Model Driven Architecture
PIM	Protocol Independent Model
PSM	Platform Specific Model
UML	Unified Modeling Language
VDEX	Vocabulary Definition Exchange
W3C	World Wide Web Consortium
XMI	XML Metadata Interchange
XML	eXtensible Mark-up Language (W3C XML)
XSD	XML Schema Definition
XSL	Extensible Stylesheet Language
XSLT	XSL Transformations

5 XML schema documentation

5.1 Core content packaging binding description

5.1.1 Schema document properties

The following subclauses outline the characteristics of each element of the content packaging XML schema binding for core²⁾ elements in tabular form. The same information is also presented as an XSD in Annex B.1.

In accordance with the IMS Global Learning Consortium (GLC) Namespace Policy [IMS-NAMESPACE] specified in IMS Content Packaging XML Binding, the “name” of an element is appended to a IMS GLC namespace URI to construct a Uniform Resource Identifier as a globally unique identifier for that element. The use of element names and URIs in the context of different implementation technologies is explained in ISO/IEC 12785-2.

To describe XML instance representation of each element declared namespaces are as follows:

Prefix	Namespaces
Default namespace	http://www.imsglobal.org/xsd/imscp_v1p1
xml	http://www.w3.org/XML/1998/namespace
xs	http://www.w3.org/2001/XMLSchema
xsi	http://www.w3.org/2001/XMLSchema-instance

Schema component representation:

```
<xs:schema targetNamespace="http://www.imsglobal.org/xsd/imscp_v1p2" version="IMS CP 1.2"
elementFormDefault="qualified" attributeFormDefault="unqualified">
<xs:import namespace="http://www.w3.org/XML/1998/namespace"
schemaLocation="http://www.w3.org/2001/xml.xsd"/>
...
</xs:schema>
```

The following subclauses was created using the schema documentation tool provided as part of the Oxygen product. To describe logical diagram used notations are as follows:

- @ : xs:attribute
-  : xs:sequence
-  : xs:anyAttribute
-  : xs:any namespace

2) The core refers to all those elements that were used in the IMS Content Packaging specification versions prior to version 1.2 which is source of ISO/IEC 12785.


-  : xs:group
- 0..1 : property for zero to one
- 0..∞ : property for zero to unbounded
-  : xs:complexType

5.1.2 Global declarations

5.1.2.1 Element: manifest

Name	manifest
Type	Manifest.Type
Nilable	no
Abstract	no


Logical diagram of manifest:

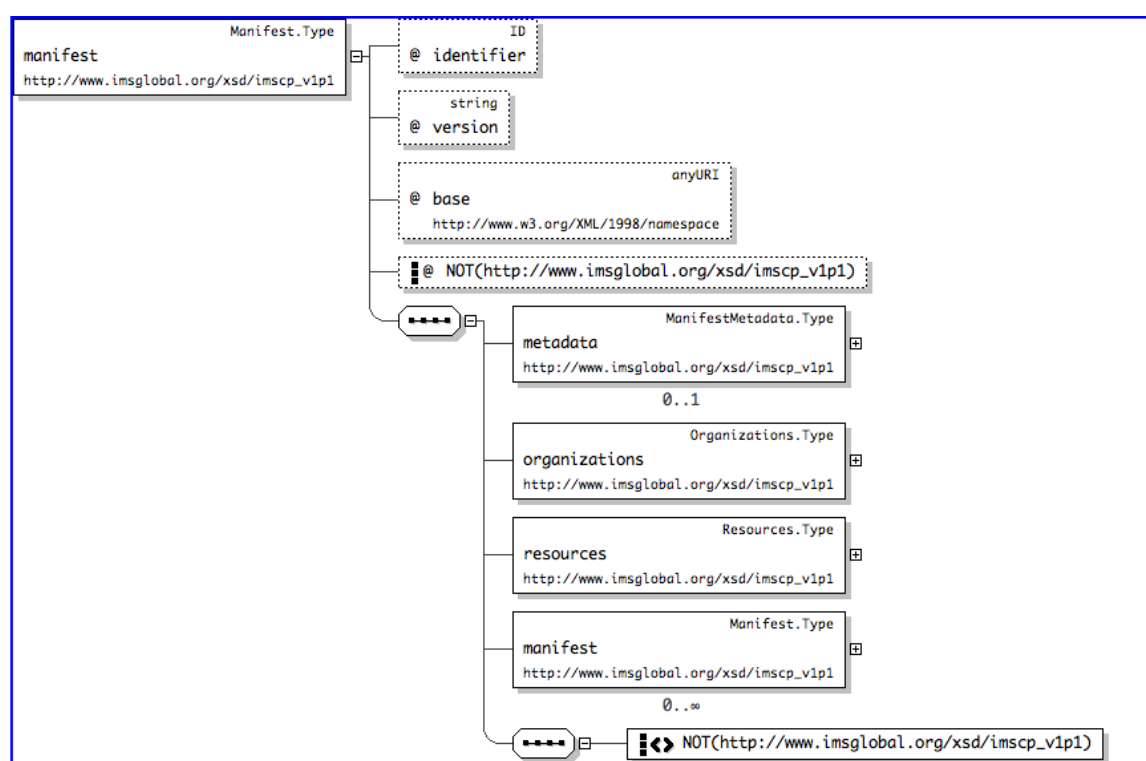

XML instance representation:

```
<manifest
  identifier="xs:ID [1]"
  version="xs:string [0..1]"
  xml:base="[0..1]"
  Allow any attributes from a namespace other than this schema's namespace (strict validation).
>
  <metadata> ManifestMetadata.Type </metadata> [0..1]
  <organizations> Organizations.Type </organizations> [1]
  <resources> Resources.Type </resources> [1]
  <manifest> Manifest.Type </manifest> [0..*]
  Allow any elements from a namespace other than this schema's namespace (strict validation). [0..*]
</manifest>
```

Diagram:

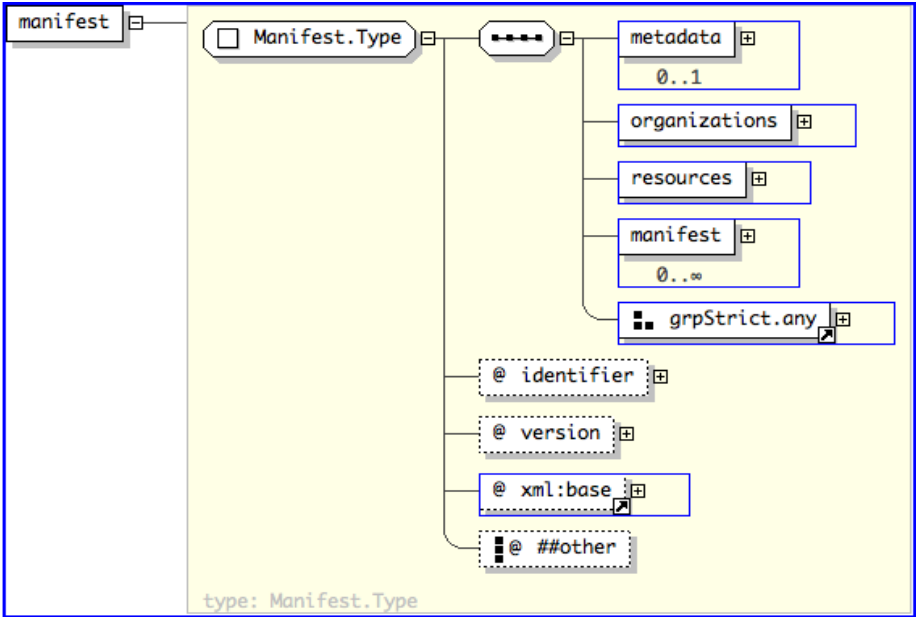

Schema component representation:

```
<xs:element name="manifest" type=" Manifest.Type "/>
```

5.1.3 Global definitions

5.1.3.1 Complex Type: Dependency.Type


Super-types:	None
Sub-types:	None
Name	Dependency.Type
Used by (from the same schema document)	Complex Type Resource.Type
Abstract	no

Documentation	<p>A dependency element provides a way to associate another collection of file references within the scope of the dependency element's parent resource element.</p> <p>Shared file references can be declared once and associated many times through a Dependency element.</p> <p>This element represents a binding of the kinds of child objects defined for Dependency.[Extension]³⁾ (see subclause 6.6.4 of ISO/IEC 12785-1:2009).</p>
----------------------	--

XML instance representation:

<...
 identifierref=" xs:string [1]"
 Allow any attributes from a namespace other than this schema's namespace (strict validation).
>
 Allow any elements from a namespace other than this schema's namespace (strict validation). [0..*]
</...>

Diagram:

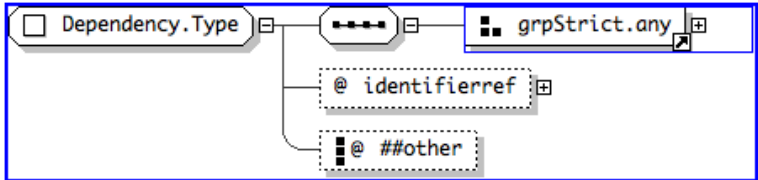

Schema component representation:

```
<xs:complexType name="Dependency.Type">
  <xs:sequence>
    <xs:group ref=" grpStrict.any " />
  </xs:sequence>
  <xs:attribute name="identifierref" type=" xs:string " use="required"/>
  <xs:anyAttribute namespace="##other" processContents="strict"/>
</xs:complexType>
```

5.1.3.2 Complex Type: File.Type

Super-types:	None
Sub-types:	None
Name	File.Type
Used by (from the same schema document)	Complex Type Resource.Type
Abstract	no

3) Symbol '[]' means children elements.