
British Standard for

Open Systems Interconnection: file transfer, access and management

Part 3. File service definition

[ISO title: Information processing systems—Open Systems Interconnection—File Transfer, Access and Management—Part 3 : File Service Definition]

Interconnexion de systèmes ouverts: Gestion, accès et transfert de fichier
Partie 3. Définition du service de transfert de fichier

Kommunikation Offener Systeme: Datenübermittlung, Zugriff und Verwaltung
Teil 3. Definition des Dateidienstes

National foreword

This Part of BS 7090 has been prepared under the direction of the Information Systems Technology Standards Policy Committee. It is identical with ISO 8571-3 : 1988 'Information processing systems—Open Systems Interconnection—File Transfer, Access and Management—Part 3 : File service definition'. The international standard was prepared and published by the International Organization for Standardization (ISO) with the active participation and approval of the UK. It is a revision of DD 113 : Part 3 : 1987 which is withdrawn.

The other Parts of BS 7090 are as follows:

- Part 1. General introduction
- Part 2. Virtual filestore definition
- Part 4. File protocol specification
- Part 5. *PICS proforma

Up-to-date information on existing and projected British Standards publications for Open Systems Interconnection is included in the 'Basic List', published as part of the BSI Information Technology Services (BITS) initiative. For details contact: Marketing Department, BSI, Linford Wood, Milton Keynes, MK14 6LE.

Terminology and conventions. The text of the international standard has been approved as suitable for publication as a British Standard without deviation. Some terminology and certain conventions are not identical with those used in British Standards; attention is drawn especially to the following.

Wherever the words 'International Standard' or 'ISO 8571' appear, referring to this standard, they should be read as 'British Standard' or 'BS 7090' respectively.

Cross-references

International standard	Corresponding British Standard
ISO 7498 : 1984	BS 6568 Reference model of open systems interconnection Part 1 : 1988 Basic reference model (incorporating connectionless-mode transmission) (Identical)
ISO/TR 8509 : 1987	DD 108 : 1988 Open Systems Interconnection service conventions (Identical) BS 7090 Open Systems Interconnection: file transfer, access and management
ISO 8571-1 : 1988	Part 1 : 1989 General introduction (Identical)
ISO 8571-2 : 1988	Part 2 : 1989 Virtual filestore definition (Identical)
ISO 8571-4 : 1988	Part 4 : 1989 File protocol specification (Identical)
ISO 8649 : 1988	BS 7091 : 1989 Open Systems Interconnection: service definition for the Association Control Service Element (Identical)
ISO 8822 : 1988	BS 7093 : 1989 Open Systems Interconnection: connection-oriented presentation service definition (Identical)

The Technical Committee has reviewed the provisions of ISO 8831, ISO 9804* and ISO 9805*, to which reference is made in the text, and has decided that they are acceptable for use in conjunction with this standard.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

* In preparation.

Implementation of Amendment 1: Filestore Management
published and effective from 15 November 1993
to BS 7090 : Part 3 : 1989

Open Systems Interconnection:
File transfer, access and management
Part 3: File service definition

National foreword (as amended by Technical Corrigenda 1 and 2)

In line 3, after 'Corrigendum 2' insert 'and Amendment 1'.

AMD 7938/November 1993

ISO text

Insert the attached as appropriate.

AMD 7938/November 1993

INTERNATIONAL STANDARD

ISO
8571-3

First edition
1988-10-01

AMENDMENT 1
1992-12-15

Information processing systems – Open Systems Interconnection – File Transfer, Access and Management –

Part 3 : File Service Definition

AMENDMENT 1 : Filestore Management

*Technologies de l'information – Interconnexion de systèmes ouverts (OSI) –
Transfert, accès et gestion de fichiers –*

Partie 3: Définition du service de fichiers

AMENDEMENT 1 : Gestion du système de fichiers



Reference number
ISO 8571-3:1988/Amd.1:1992 (E)

AVA Documents
Document Sharing Hub

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Amendment 1 to International Standard ISO 8571-3:1988 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*.

ISO 8571-3 consists of the following parts, under the general title *Information processing systems – Open Systems Interconnection – File Transfer, Access and Management*

- *Part 1 : General introduction*
- *Part 2 : Virtual Filestore Definition*
- *Part 3 : File Service Definition*
- *Part 4 : File Protocol Specification*
- *Part 5 : Protocol Implementation Conformance Statement Proforma*

© ISO/IEC 1992

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Information processing systems – Open Systems Interconnection – File Transfer, Access and Management –

Part 3 : File Service Definition

AMENDMENT 1 : Filestore Management

NOTE – This amendment has additional subclauses and tables to ISO 8571:1988 which are indicated by the use of lower case Roman letters beginning with "a" and imply ordering alphabetically, following the clause with the same numerical value in ISO 8571. These and all subsequent subclauses, tables, and cross references will be renumbered in subsequent editions.

0 Introduction

(amend 3rd paragraph, page 1)

ISO 8571 defines services for file transfer, access and management. It also specifies a protocol available within the application layer of the Reference Model. The service defined is of the category Application Service Element (ASE). It is concerned with identifiable bodies of information which can be treated as files, stored and managed within open systems, or passed between application processes.

(amend 4th paragraph, page 1)

ISO 8571 defines a basic file service. It provides sufficient facilities to support file transfer, file access and management of files stored on open systems. ISO 8571 does not specify the interfaces to a file transfer, access or management facility within the local system.

Section one: General

6.2 File service levels

(amend 1st paragraph's item (a), page 3)

- a) the external file service (EFS), in which the user states its FTAM quality of service requirements, but has no awareness of error recovery, delegating such considerations to the service provider. Transfer of file data and other operations on the filestore are modeled in the external file service as a series of error-free operations. Thus within the external file service there is no visibility of recoverable errors or the error recovery actions;

6.3 Regimes of the file service

(amend 1st paragraph, page 4)

Four types of file service regime are defined:

- a) the FTAM regime, existing while the application association is used for the FTAM protocol, with which a group of file object complete pathnames is associated;
- b) the object selection regime during which a particular object is associated with the FTAM regime;
- c) the file open regime during which a particular set of processing mode, presentation contexts and concurrency controls is in operation;
- d) the data transfer regime during which a particular bulk data transfer specification and direction of transfer are in force.

(amend 3rd paragraph, page 4)

The file service provides for:

- e) a sequence of object selection regimes in an FTAM regime;
- f) a sequence of file open regimes in an object selection regime;
- g) a sequence of data transfer regimes within a file open regime; the data transfer regimes may each be for either read or write data transfer. Write data transfer permits the operations insert, replace or extend.

7.2 Filestore management

(replace clause, page 4)

Eight services are associated with filestore management:

- a) the change current name prefix service (see clause 14a.1) is used by the initiator to control the mapping of incomplete pathnames to complete pathnames during the current association;
- b) the list file-directory service (see clause 14a.2) is used by the initiator to interrogate for the attributes of objects which correspond to a given attribute value assertion list in or under a file-directory;
- c) the generalized selection service (see clause 14b.1) is used by the initiator to identify a group of pathnames of files with attributes corresponding to a given attribute value assertion list;
- d) the group deletion service (see clause 14b.2) is used by the initiator to remove the file objects identified by pathnames in the generalized selection group such that the objects cease to exist.
- e) the group move service (see clause 14b.3) is used by the initiator to transfer the file objects identified by pathnames in the generalized selection group to a destination directory.
- f) the group copy service (see clause 14b.4) is used by the initiator to duplicate the file objects identified by pathnames in the generalized selection group to a destination directory.
- g) the group list service (see clause 14b.5) is used by the initiator to interrogate the pathnames of the file objects in the generalized selection group.
- h) the group change attribute service (see clause 14b.6) is used by the initiator to modify the attributes of file objects, identified by complete pathnames within the generalized selection group activity attribute.

(amend title clause 7.3, page 4)

7.3 Object selection regime control

(amend 1st paragraph, page 4)

(amend Figure 2, page 4)

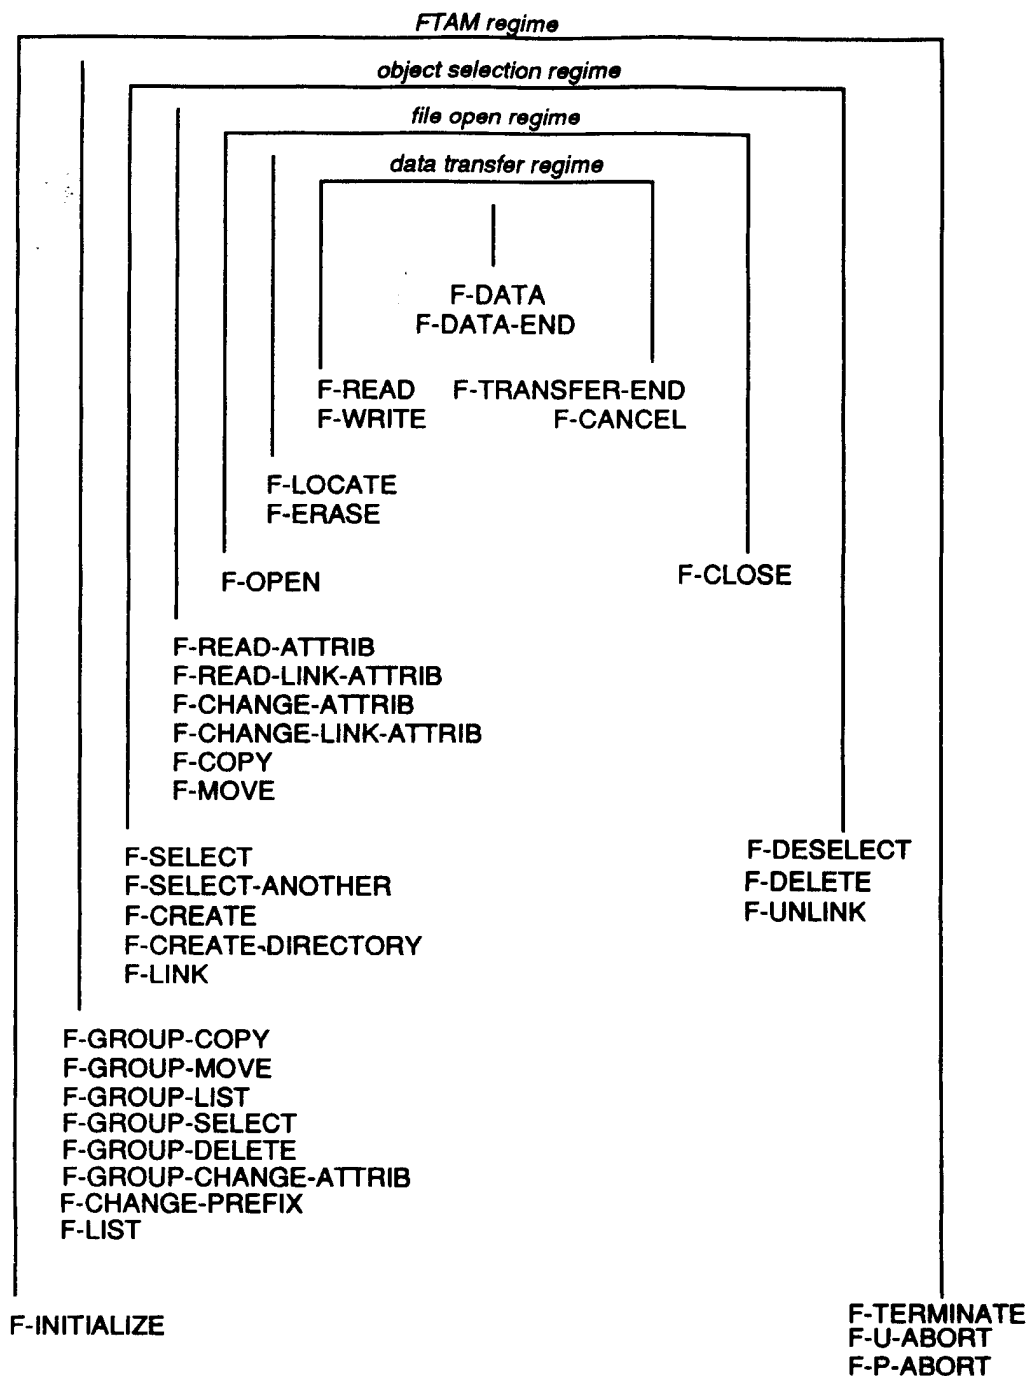


Figure 2 – File service regimes and related primitives

Eight services are associated with object selection regime control:

- a) the object selection service (see clause 15.1) is used by the initiator to select a specific object by pathname and to bind the specified object to the FTAM regime;
- aa) the select another service (see clause 15.1a) is used by the initiator to bind a previously unselected file from the generalized selection group to the FTAM regime;
- b) the object deselection service (see clause 15.2) is used by the initiator to release the binding between the FTAM regime and the specified object;
- c) the file creation service (see clause 15.3) is used by the initiator either
 - 1) to create a specified file and to select the newly created file; or
 - 2) depending on the override parameter of F-CREATE, to select an existing file;
 and then to bind the specified file to the FTAM regime;
- ca) the file-directory creation service (see clause 15.3a) is used by the initiator to create a specified file-directory object and bind the newly created file-directory to the FTAM regime;
- cb) the reference creation service (see clause 15.3b) is used by the initiator to create a specified reference object and bind the existing object to which it is linked to the FTAM regime;
- d) the object deletion service (see clause 15.4) is used by the initiator to release the binding between the FTAM regime and the specified object in such a way that the previously selected object ceased to exist;
- e) the reference deletion service (see clause 15.5) is used to delete an existing reference, leaving the object to which it was linked intact in the filestore, and release the binding between the FTAM regime and the linked object.

(amend title to clause 7.4, page 5)

7.4 Object management

(amend 1st paragraph, page 5)

Six services are associated with object management:

- a) the read attributes service (see clause 16.1) is used by the initiator to interrogate the object attributes of the selected object;
- b) the change attributes service (see clause 16.2) is used by the initiator to modify the object attributes of the selected object;
- c) the read reference attributes service (see clause 16.3) is used by the initiator to interrogate the object attributes of the reference identified by the current pathname activity attribute;
- d) the change reference attributes service (see clause 16.4) is used by the initiator to modify the object attributes of the reference identified by the current pathname activity attribute;
- e) the move object service (see clause 16.5) is used by the initiator to place the currently selected object into a specific file-directory by changing its primary pathname object attribute;
- f) the copy object service (see clause 16.6) is used by the initiator to create a duplicate of the currently selected object in a specific file-directory.

NOTE – When accessing an object via a reference, the move object and copy object services operate only on the reference object, not the referent object.

7.6 Grouping control

(append after 1st paragraph, page 5)

The set of primitives contained within a group are constrained as follows:

- a) FTAM regime control, filestore management and generalized filestore service primitives will never appear within a group;
- b) recovery and restart service primitives will never appear within a group;
- c) data transfer regime primitives, including F-DATA, F-DATA-END, F-LOCATE and F-ERASE, will never appear within a group;
- d) if a regime is requested to be created and requested to be terminated within a single grouped sequence, then every regime requested to be created within the grouped sequence is also requested to be terminated within that grouped sequence;
- e) primitives may be present within a group only if they are allowed within the negotiated service class, and the corresponding functional unit was

negotiated during the FTAM regime establishment;

- f) any service from list 1 (below) must not appear in the same grouped sequence with a service from list 2:

- 1) F-CREATE,
F-CREATE-DIRECTORY
- 2) F-READ-LINK-ATTRIBUTES
F-CHANGE-LINK-ATTRIBUTES
F-UNLINK

Clause 12.2 and associated tables also place constraints on legal grouped sequences.

(append after clause 8.1.6, page 6)

8.1.6a Limited filestore management

The limited filestore management functional unit supports management of the current name prefix, and listing of objects within the filestore. In addition this functional unit supports the selection, deselection, and interrogation of directory and reference attributes.

8.1.6b Enhanced filestore management

The enhanced filestore management functional unit provides for the creation and deletion of file-directory and reference objects, and the modification of reference and directory object attributes.

8.1.6c Object manipulation functional unit

The object manipulation functional unit provides services to manage the position of objects within the filestore, and to duplicate objects within the filestore.

8.1.6d Group manipulation functional unit

The group manipulation functional unit provides for identifying a group of files within the filestore, interrogating the contents of that group, and for manipulation operations on that group of files.

8.2.1 File transfer class

(amend 1st paragraph, page 6)

- ea) Optionally, the limited filestore management functional unit;

(amend 2nd paragraph, page 6)

In the file transfer service class, the use of the services is constrained so that there is a sequence of zero or more FTAM events on the application association. Each FTAM event requested by the initiator is a series of requests consisting of:

- 1) a single, optional, limited filestore management procedure to change current name prefix or list filestore;
- 2) a single grouped series of requests to establish a file open regime. (See clause 7.6 for valid grouped sequences);
- 3) a single bulk data transfer procedure, for either a read transfer or a write transfer. The processing mode parameter on the F-OPEN primitive is set to either a read or a valid write action, as defined in the constraint set, but not both.
- 4) a single grouped series of requests to release the file open and select regimes. (See clause 7.6 for valid grouped series.).

(delete note, page 6)

8.2.2 File access class

(amend 1st paragraph, pages 6 and 8)

The file access class consists of:

- a) the kernel functional unit;
- b) both of the read and write functional units;
- c) the file access functional unit;
- d) optionally, the grouping functional unit. If the grouping functional unit is successfully negotiated, its valid use in any instance by the initiator is optional but the acceptance by the responder is always mandatory.
- e) optionally, the limited file management functional unit;
- f) optionally, but only if the limited file management functional unit is present, the enhanced file management functional unit;
- fa) optionally, the limited filestore management functional unit;
- fb) optionally, but only if the limited filestore management functional unit is present, the enhanced filestore management functional unit;
- fc) optionally, the object manipulation functional unit;
- fd) optionally, but only if the object manipulation functional unit is present, the group manipulation functional unit;
- g) optionally, the FADU locking functional unit;
- h) optionally, in the internal file service, the recovery functional unit;

(append after entry U6, page 7)

Table 1 – Services and functional units of the External File Service

U6a Limited filestore management	change current name prefix list file-directory file-directory selection file-directory deselection reference selection reference deselection read file-directory attributes read reference attributes	○	○	○	○	○	14a.1 14a.2 15.1 15.2 15.1 15.2 16.1 16.3
U6b Enhanced filestore management	file-directory creation file-directory deletion reference creation reference deletion change file-directory attributes change reference attributes (requires 6a)		○	○	○	○	15.3a 15.4 15.3b 15.5 16.2 16.4
U6c Object manipulation	move object copy object		○	○	○	○	16.5 16.6
U6d Group manipulation	generalized selection generalized deletion group change attributes group move group copy group list select another		○	○	○	○	14b.1 14b.2 14b.7 14b.3 14b.5 14b.6 15.1a

i) optionally, in the internal file service, the restart data transfer functional unit.

(delete 2nd note, page 8)

8.2.3 File management class

(amend 1st paragraph, page 8)

The file management class consists of:

- a) the kernel functional unit;
- b) the limited file management functional unit;

c) optionally, the enhanced file management functional unit;

d) the grouping functional unit;

e) optionally, the limited filestore management functional unit;

f) optionally, but only if the limited filestore management functional unit is present, the enhanced filestore management functional unit;

g) optionally, the object manipulation functional unit;

- h) optionally, but only if the object manipulation functional unit is present, the group manipulation functional unit.

(amend 2nd paragraph, page 8)

In the file management service class the use of the services is constrained so that there is a series of zero or more FTAM events on the application association. Each FTAM event requested by the initiator is a single grouped series of requests. (See clause 7.6 for valid sets of grouped primitives.) The file management class imposes the following further restrictions on grouped primitives:

- a) The F-OPEN and F-CLOSE primitives are excluded from use;
- b) if a grouped series of primitives establishes a select regime, it must also terminate the select regime.

8.2.4 File transfer and management class

(amend 1st paragraph, page 8)

The file transfer and management class consists of:

- a) the kernel functional unit;
- b) the grouping functional unit;
- c) one or both of the read or write functional units;
- d) the limited file management functional unit;
- e) optionally, the enhanced file management functional unit;
- ea) optionally, the limited filestore management functional unit;
- eb) optionally, but only if the limited filestore management functional unit is present, the enhanced filestore management functional unit;
- ec) optionally, the object manipulation functional unit;
- ed) optionally, but only if the object manipulation functional unit is present, the group manipulation functional unit;
- f) optionally, in the internal file service, the restart data transfer function unit;
- g) optionally, in the internal file service, the recovery functional unit.

(amend 2nd paragraph, page 8)

In the file transfer and management service class, the use of the services is constrained so that there is a repeated series of FTAM events on the application

association. Each FTAM event is either;
a transfer comprising:

- 1) a single, optional, limited filestore management procedure to change current name prefix or list filestore;
- 2) a single grouped series of requests requested by the initiator to establish a file open regime. (See clause 7.6 for valid grouped series).
- 3) a single bulk data transfer procedure, for either a read transfer or a write transfer. The processing mode parameter on the F-OPEN primitive is set to either a read or a valid write action, as defined in the constraint set, but not both.
- 4) a single grouped series of requests requested by the initiator to release the file open and select regimes. (See clause 7.6 for valid grouped series.)

or a single grouped series of requests requested by the initiator to effect management. (See clause 7.6 for valid grouped sequences.) The open regime will not be entered. If the select regime is established within a grouped series, then it will also be terminated within the grouped series of requests.

(delete the node, page 8)

(append after table 3, page 9)

limited filestore management	limited filestore management
enhanced filestore management	enhanced filestore management

Section two: Definition of file service primitives

12.2 Constraints on the issue of primitives

(amend 1st paragraph, pages 11 & 14; this includes the list of grouped sequences)

The primitives may be issued in any sequence consistent with the constraints given in tables 7 to 10. The sequences of primitives are defined under the individual services. Individual series of requests requested by the initiator may be interleaved to form grouped sequences. See clause 7.6 for valid groups.

(amend the notes, page 14)

NOTES

- 1) Not all sequences are allowed in the file transfer, file management, and file transfer and management classes (see clauses 8.2.1, 8.2.3, 8.2.4). In these classes, the threshold parameter is set so that the sequences either succeed or fail as a whole, i.e. set to the number of primitives between the begin group and end group primitives.
- 2) Other constraints will affect the ability of the file service user or file service provider to invoke the various procedures, such as flow control constraints on sending data or constraints on the ability of a file service user to accept spontaneous F-P-ABORT indications from the file service provider.

12.3.2 Conventions for tables 9 and 10

(amend 1st paragraph, page 14)

In tables 9 and 10, the entries indicate the functional units required for the succession to occur. The entries are:

Kernel	kernel functional unit
Grouping	grouping functional unit
Lmgt	limited management functional unit
Emgt	enhanced management functional unit
Recover	recover functional unit
Access	file access functional unit
G-Lmgt	grouping and limited file management functional units
	G-Emgt grouping and enhanced management functional units

Lfmgt	limited filestore management functional unit
Efmgt	enhanced filestore management functional unit
G-Lfmgt	grouping and limited filestore management functional units
G-Efmgt	grouping and enhanced filestore management functional units
Obmn	object manipulation functional unit
G-Obmn	grouping and object manipulation functional units
Grmn	group manipulation functional unit
G-Grmn	grouping and group manipulation functional units

(insert after 1st paragraph, page 14)

Tables 9 and 10 assume that completion of a previous file service event implies that all functional units required by the corresponding file service primitive were negotiated.

(insert after clause 12.3.2, page 14)

12.3.3 Notes from tables 9 and 10

- [1] This transition is only allowed if no regimes other than the FTAM regime are currently established.
- [2] This transition is only allowed if the select regime is the innermost regime established.
- [3] This transition is only allowed if the open regime is the innermost regime established.

12.4 Confirmed services

(amend 2nd paragraph, page 20)

A request to establish a new regime (F-INITIALIZE, F-SELECT, F-SELECT-ANOTHER, F-CREATE, F-CREATE-DIRECTORY, F-LINK OR F-OPEN) may be rejected by use of a response with state result parameter indicating failure (see clause 13.1).

Table 6, page 11 modify as follows:

⋮	⋮	⋮	⋮
F-SELECT	Yes	Initiator	State result Action result Attributes Requested access Referent indicator Access passwords Concurrency control Shared ASE information Account Diagnostic

(append to table 6, pages 11 and 12)

Table 6 – File service primitives

F-CHANGE-PREFIX	Yes	Initiator	Action result Reset Destination file-directory Access passwords Diagnostic
F-LIST	Yes	Initiator	Action result Attribute value assertions Scope Access passwords Attribute names Objects attributes list Diagnostic
F-GROUP-SELECT	Yes	Initiator	Action result State result Attribute value assertions Requested access Scope Access passwords Concurrency control Maximum set size Account Shared ASE information Diagnostic
F-GROUP-DELETE	Yes	Initiator	Action result Charging Request operation result Operation result Shared ASE information Diagnostic
F-GROUP-COPY	Yes	Initiator	Action result Destination file-directory Override Error action Create password Access passwords Attributes Request operation result Operation result Diagnostic
F-GROUP-MOVE	Yes	Initiator	Action result Destination file-directory Override Error action Create password Attributes Request operation result Operation result Diagnostic
F-GROUP-LIST	Yes	Initiator	Action result Attribute names Objects attributes list Diagnostic
F-GROUP-CHANGE-ATTRIB	Yes	Initiator	Action result Attributes Error action Shared ASE information Diagnostic
F-SELECT-ANOTHER	Yes	Initiator	State result Action result Last member indicator Shared ASE information referent indicator Diagnostic

(append to table 6, pages 11 and 12)

Table 6 (continued) – File service primitives

F-CREATE-DIRECTORY	Yes	Initiator	State result Action result Attributes Create password Requested access Shared ASE information Account Diagnostic
F-LINK	Yes	Initiator	State result Action result Attributes Target object Create password Requested access Access passwords Concurrency control Shared ASE information Account Diagnostic
F-UNLINK	Yes	Initiator	Action result Shared ASE information Charging Diagnostic
F-READ-LINK-ATTRIB	Yes	Initiator	Action result Attribute names Attributes Diagnostic
F-CHANGE-LINK-ATTRIB	Yes	Initiator	Action result Attributes Diagnostic
F-COPY	Yes	Initiator	Action result Destination file-directory Override Create password Access passwords Attributes Diagnostic
F-MOVE	Yes	Initiator	Action result Destination file-directory Override Create password Access passwords Attributes Diagnostic

(amend Figure 3, page 13)

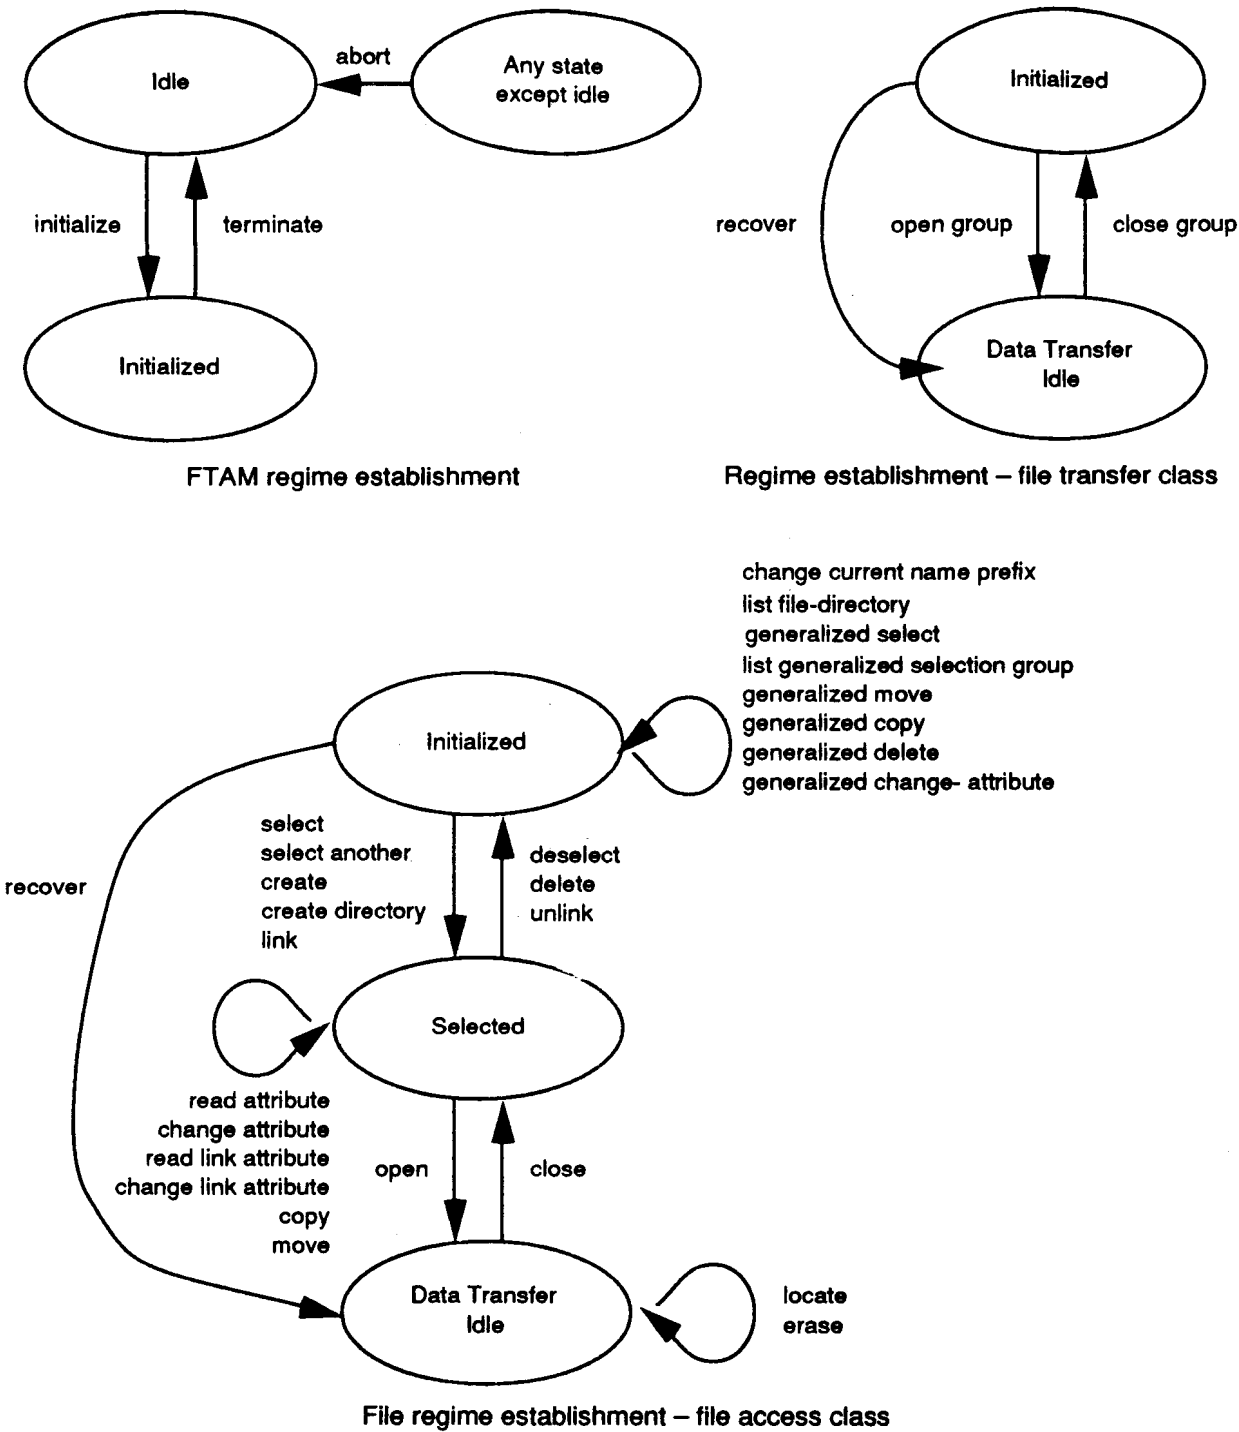


Figure 3 – Simplified State Diagram for successful activity (see Annex E)

(annexes tables 3 and 10, pages 16 to 19)

Table 9 – Sequence of service primitives for file service regimes – initiator

Previous file service event	F-CHANGE-PREFIX.request	F-LIST.request	F-GROUP-SELECT.request	F-GROUP-DELETE.request	F-GROUP-COPY.request	F-GROUP-MOVE.request
FTAM regime established	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-CHANGE-PREFIX.request						
F-CHANGE-PREFIX.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-LIST.request						
F-LIST.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-SELECT.request						Grmn
F-GROUP-SELECT.confirm (+ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-SELECT.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-DELETE.request						
F-GROUP-DELETE.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-COPY.request						
F-GROUP-COPY.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-MOVE.request						
F-GROUP-MOVE.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-LIST.request						
F-GROUP-LIST.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-GROUP-CHANGE-ATTRIBUTE.request						
F-GROUP-CHANGE-ATTRIBUTE.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-SELECT.request						
F-SELECT.confirm (+ve)						
F-SELECT.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-SELECT-ANOTHER.request						
F-SELECT-ANOTHER.confirm (+ve)						
F-SELECT-ANOTHER.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-CREATE.request						
F-CREATE.confirm (+ve)						
F-CREATE.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-CREATE-DIRECTORY.request						
F-CREATE-DIRECTORY.confirm (+ve)						
F-CREATE-DIRECTORY.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-LINK.request						
F-LINK.confirm (+ve)						
F-LINK.confirm (-ve)	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-DESELECT.request						
F-DESELECT.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-DELETE.request						
F-DELETE.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-UNLINK.request						
F-UNLINK.confirm	Lfmq	Lfmq	Grmn	Grmn	Grmn	Grmn
F-READ-ATTRIB.request						
F-READ-ATTRIB.confirm						
F-CHANGE-ATTRIB.request						
F-CHANGE-ATTRIB.confirm						
F-READ-LINK-ATTRIB.request						

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-CHANGE-PREFIX.request	F-LIST.request	F-GROUP-SELECT.request	F-GROUP-DELETE.request	F-GROUP-COPY.request	F-GROUP-MOVE.request
F-READ-LINK-ATTRIB.confirm						
F-CHANGE-LINK-ATTRIB.request						
F-CHANGE-LINK-ATTRIB.confirm						
F-COPY.request						
F-COPY.confirm						
F-MOVE.request						
F-MOVE.confirm						
F-OPEN.request						
F-OPEN.confirm (+ve)						
F-OPEN.confirm (-ve)						
F-CLOSE.request						
F-CLOSE.confirm						
F-BEGIN-GROUP.request						
F-BEGIN-GROUP.confirm						
F-END-GROUP.request						
F-END-GROUP.confirm	Lfmg	Lfmg	Grmn	Grmn	Grmn	Grmn
F-RECOVER.request						
F-RECOVER.confirm (+ve)						
F-RECOVER.confirm (-ve)	Lfmg	Lfmg	Grmn	Grmn	Grmn	Grmn
Bulk data transfer						
F-LOCATE.request						
F-LOCATE.confirm						
F-ERASE.request						
F-ERASE.confirm						

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-GROUP- CHANGE- ATTRIB .request	F-GROUP- LIST .request	F-SELECT .request	F-SELECT- ANOTHER .request	F-CREATE .request	F-CREATE- DIRECTORY .request	F-LINK .request
FTAM regime established	Grmn	Grmn	Kernel or Lfmg		Lmgt	Efmg	Efmg
F-CHANGE-PREFIX.request							
F-CHANGE-PREFIX.confirm	Grmn	Grmn	Lfmg		Lmgt	Efmg	Efmg
F-LIST.request							
F-LIST.confirm	Grmn	Grmn	Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-SELECT.request							
F-GROUP-SELECT.confirm (+ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-SELECT.confirm (-ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-DELETE.request							
F-GROUP-DELETE.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-COPY.request							
F-GROUP-COPY.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-MOVE.request							
F-GROUP-MOVE.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-GROUP-LIST.request							
F-GROUP-LIST.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-SELECT.request							
F-SELECT.confirm (+ve)							
F-SELECT.confirm (-ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-SELECT-ANOTHER.request							
F-SELECT-ANOTHER.confirm (+ve)							
F-SELECT-ANOTHER.confirm (-ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-CREATE.request							
F-CREATE.confirm (+ve)							
F-CREATE.confirm (-ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-CREATE-DIRECTORY.request							
F-CREATE-DIRECTORY.confirm (+ve)							
F-CREATE-DIRECTORY.confirm (-ve)	Grmn	Grmn	Efmg	Grmn	Lmgt	Efmg	Efmg
F-LINK.request							
F-LINK.confirm (+ve)							
F-LINK.confirm (-ve)	Grmn	Grmn	Efmg	Grmn	Lmgt	Efmg	Efmg
F-DESELECT.request							
F-DESELECT.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-DELETE.request							
F-DELETE.confirm	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
F-UNLINK.request							
F-UNLINK.confirm	Grmn	Grmn	Efmg	Grmn	Lmgt	Efmg	Efmg
F-READ-ATTRIB.request							
F-READ-ATTRIB.confirm							
F-CHANGE-ATTRIB.request							
F-CHANGE-ATTRIB.confirm							
F-READ-LINK-ATTRIB.request							

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-GROUP- CHANGE- ATTRIB.request	F-GROUP- LIST.request	F-SELECT .request	F-SELECT- ANOTHER .request	F-CREATE .request	F-CREATE- DIRECTORY .request	F-LINK .request
F-READ-LINK-ATTRIB.confirm							
F-CHANGE-LINK-ATTRIB.request							
F-CHANGE-LINK-ATTRIB.confirm							
F-COPY.request							
F-COPY.confirm							
F-MOVE.request							
F-MOVE.confirm							
F-OPEN.request							
F-OPEN.confirm (+ve)							
F-OPEN.confirm (-ve)							
F-CLOSE.request							
F-CLOSE.confirm							
F-BEGIN-GROUP.request			Kernel or G-Lfmg	Grmn	Lmgt	Efmg	Efmg
F-BEGIN-GROUP.confirm							
F-END-GROUP.request							
F-END-GROUP.confirm	Grmn	Grmn	Kernel or G-Lfmg	Grmn	Lmgt	Efmg	Efmg
F-RECOVER.request							
F-RECOVER.confirm (+ve)							
F-RECOVER.confirm (-ve)	Grmn	Grmn	Kernel or Lfmg	Grmn	Lmgt	Efmg	Efmg
Bulk data transfer							
F-LOCATE.request							
F-LOCATE.confirm							
F-ERASE.request							
F-ERASE.confirm							

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-DESELECT .request	F-DELETE .request	F-UNLINK .request	F-READ- ATTRIB.request	F-CHANGE- ATTRIB .request	F-READ- LINK-ATTRIB .request
FTAM regime established						
F-CHANGE-PREFIX.request						
F-CHANGE-PREFIX.confirm						
F-LIST.request						
F-LIST.confirm						
F-GROUP-SELECT.request						
F-GROUP-SELECT.confirm (+ve)						
F-GROUP-SELECT.confirm (-ve)						
F-GROUP-DELETE.request						
F-GROUP-DELETE.confirm						
F-GROUP-COPY.request						
F-GROUP-COPY.confirm						
F-GROUP-MOVE.request						
F-GROUP-MOVE.confirm						
F-GROUP-LIST.request						
F-GROUP-LIST.confirm						
F-GROUP-CHANGE-ATTRIB.request						
F-GROUP-CHANGE-ATTRIB.confirm						
F-SELECT.request	Grouping G-Lfmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Lmgt G-Lfmg	G-Lfmg
F-SELECT.confirm (+ve)	Kernel or Lfmg	Lmgt or Efmg	Efmg	Lmgt or Lfmg	Lmgt or Lfmg	Lfmg
F-SELECT.confirm (-ve)						
F-SELECT-ANOTHER.request	Grouping G-Lfmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Lmgt G-Lfmg	G-Lfmg
F-SELECT-ANOTHER.confirm (+ve)	Kernel or Lfmg	Lmgt or Efmg	Efmg	Lmgt or Lfmg	Lmgt or Lfmg	Lfmg
F-SELECT-ANOTHER.confirm (-ve)						
F-CREATE.request	Grouping	G-Lmgt		G-Lmgt	G-Emgt	
F-CREATE.confirm (+ve)	Kernel	Lmgt		Lmgt	Emgt	
F-CREATE.confirm (-ve)						
F-CREATE-DIRECTORY.request	G-Efmg	G-Efmg		G-Efmg	G-Efmg	
F-CREATE-DIRECTORY.confirm (+ve)	Kernel or Efmg	Efmg		Efmg	Efmg	
F-CREATE-DIRECTORY.confirm (-ve)						
F-LINK.request	G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Lfmg
F-LINK.confirm (+ve)	Efmg	Efmg	Efmg	Efmg	Efmg	Lfmg
F-LINK.confirm (-ve)						
F-DESELECT.request						
F-DESELECT.confirm						
F-DELETE.request						
F-DELETE.confirm						
F-UNLINK.request						
F-UNLINK.confirm						
F-READ-ATTRIB.request	Grouping or Lfmg	G-Lmgt G-Lfmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-READ-ATTRIB.confirm	Kernel or Lfmg	Lmgt or Lfmg	Efmg	Lmgt or Lfmg	Emgt or Efmg	Lfmg
F-CHANGE-ATTRIB.request	Grouping or Efmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Efmg	G-Emgt G-Efmg	G-Lfmg
F-CHANGE-ATTRIB.confirm	Kernel or Efmg	Lmgt or Efmg	Efmg	Lmgt or Efmg	Emgt or Efmg	Lfmg
F-READ-LINK-ATTRIB.request	Grouping	G-Efmg	G-Efmg	G-Lmgt G-Efmg	G-Lfmg G-Efmg	G-Lfmg

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-DESELECT .request	F-DELETE .request	F-UNLINK .request	F-READ- ATTRIB.request	F-CHANGE- ATTRIB .request	F-READ- LINK-ATTRIB .request
F-READ-LINK-ATTRIB.confirm	Lfmg	Efmg	Efmg	Lmgt Lfmg	Efmg	Lfmg
F-CHANGE-LINK-ATTRIB.request	G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Efmg
F-CHANGE-LINK-ATTRIB.confirm	Efmg	Efmg	Efmg	Efmg	Efmg	Efmg
F-COPY.request	G-Lfmg Grouping	G-Lmgt G-Efmg	G-Efmg	G-Lfmg G-Lmgt	G-Efmg G-Emgt	G-Lfmg
F-COPY.confirm	Lfmg Kernel	Lmgt Efmg	Efmg	Lmgt Lfmg	Efmg Emgt	Lfmg
F-MOVE.request	G-Lfmg Grouping	G-Lmgt G-Efmg	G-Efmg	G-Lfmg G-Lmgt	G-Efmg G-Emgt	G-Lfmg
F-MOVE.confirm	Lfmg Kernel	Lmgt Efmg	Efmg	Lmgt Lfmg	Efmg Emgt	Lfmg
F-OPEN.request						
F-OPEN.confirm (+ve)						
F-OPEN.confirm (-ve)	Kernel	Lmgt	Efmg	Lmgt	Emgt	Lfmg
F-CLOSE.request	Grouping	G-Lmgt	G-Efmg	G-Lmgt	G-Emgt	G-Lfmg
F-CLOSE.confirm	Kernel	Lmgt	Efmg	Lmgt	Emgt	Lfmg
F-BEGIN-GROUP.request	Lfmg Kernel [2]	Efmg Lmgt [2]	Efmg [2]	Lfmg Lmgt[2]	Efmg Emgt [2]	Lfmg [2]
F-BEGIN-GROUP.confirm						
F-END-GROUP.request						
F-END-GROUP.confirm	Lfmg Kernel [2]	Efmg Lmgt [2]	Efmg [2]	Lfmg Lmgt [2]	Efmg Emgt [2]	Lfmg [2]
F-RECOVER.request						
F-RECOVER.confirm (+ve)						
F-RECOVER.confirm (-ve)						
Bulk data transfer						
F-LOCATE.request						
F-LOCATE.confirm						
F-ERASE.request						
F-ERASE.confirm						

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-CHANGE-LINK-ATTRIB.request	F-COPY.request	F-MOVE.request	F-OPEN.request	F-CLOSE.request	F-BEGIN-GROUP.request
FIAM regime established						Grouping
F-CHANGE-PREFIX.request						
F-CHANGE-PREFIX.confirm						Grouping
F-LIST.request						
F-LIST.confirm						Grouping
F-GROUP-SELECT.request						
F-GROUP-SELECT.confirm (+ve)						
F-GROUP-SELECT.confirm (-ve)						Grouping
F-GROUP-DELETE.request						
F-GROUP-DELETE.confirm						Grouping
F-GROUP-COPY.request						
F-GROUP-COPY.confirm						Grouping
F-GROUP-MOVE.request						
F-GROUP-MOVE.confirm						Grouping
F-GROUP-LIST.request						
F-GROUP-LIST.confirm						Grouping
F-GROUP-CHANGE-ATTRIB.request						
F-GROUP-CHANGE-ATTRIB.confirm						Grouping
F-SELECT.request	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-SELECT.confirm (+ve)	Efmg	Obmn	Obmn	Kernel		Grouping
F-SELECT.confirm (-ve)						Grouping
F-SELECT-ANOTHER.request	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-SELECT-ANOTHER.confirm (+ve)	Efmg	Obmn	Obmn	Kernel		Grouping
F-SELECT-ANOTHER.confirm (-ve)						Grouping
F-CREATE.request		G-Obmn	G-Obmn	Grouping		
F-CREATE.confirm (+ve)		Obmn	Obmn	Kernel		Grouping
F-CREATE.confirm (-ve)						Grouping
F-CREATE-DIRECTORY.request		G-Obmn	G-Obmn			
F-CREATE-DIRECTORY.confirm (+ve)		Obmn	Obmn			Grouping
F-CREATE-DIRECTORY.confirm (-ve)						Grouping
F-LINK.request	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-LINK.confirm (+ve)	Efmg	Obmn	Obmn	Kernel		Grouping
F-LINK.confirm (-ve)						Grouping
F-DESELECT.request						
F-DESELECT.confirm						Grouping
F-DELETE.request						
F-DELETE.confirm						Grouping
F-UNLINK.request						
F-UNLINK.confirm						Grouping
F-READ-ATTRIB.request	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-READ-ATTRIB.confirm	Efmg	Obmn	Obmn	Kernel		Grouping
F-CHANGE-ATTRIB.request	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-CHANGE-ATTRIB.confirm	Efmg	Obmn	Obmn	Kernel		Grouping
F-READ-LINK-ATTRIB.request	G-Efmg	G-Obmn	G-Obmn	Grouping		

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-CHANGE-LINK-ATTRIB.request	F-COPY.request	F-MOVE.request	F-OPEN.request	F-CLOSE.request	F-BEGIN-GROUP.request
F-READ-LINK-ATTRIB.confirm	Efmfg	Obmn	Obmn	Kernel		Grouping
F-CHANGE-LINK-ATTRIB.request	G-Efmfg	G-Obmn	G-Obmn	Grouping		
F-CHANGE-LINK-ATTRIB.confirm	Efmfg	Obmn	Obmn	Kernel		Grouping
F-COPY.request	G-Efmfg	G-Obmn	G-Obmn	Grouping		
F-COPY.confirm	Efmfg	Obmn	Obmn	Kernel		Grouping
F-MOVE.request	G-Efmfg	G-Obmn	G-Obmn	Grouping		
F-MOVE.confirm	Efmfg	Obmn	Obmn	Kernel		Grouping
F-OPEN.request					Grouping	
F-OPEN.confirm (+ve)					Kernel	Grouping
F-OPEN.confirm (-ve)	Efmfg	Obmn	Obmn	Kernel		Grouping
F-CLOSE.request	G-Efmfg	G-Obmn	G-Obmn			
F-CLOSE.confirm	Efmfg	Obmn	Obmn	Kernel	Kernel	Grouping
F-BEGIN-GROUP.request	Efmfg [2]	Obmn [2]	Obmn [2]		Kernel [3]	
F-BEGIN-GROUP.confirm						
F-END-GROUP.request						
F-END-GROUP.confirm	Efmfg [2]	Obmn [2]	Obmn [2]	Kernel [2]	Kernel [3]	Grouping
F-RECOVER.request						
F-RECOVER.confirm (+ve)					Kernel	Grouping
F-RECOVER.confirm (-ve)						Grouping
Bulk data transfer					Kernel	Grouping
F-LOCATE.request						
F-LOCATE.confirm					Kernel	Grouping
F-ERASE.request						
F-ERASE.confirm					Kernel	Grouping

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-END-GROUP .request	F-RECOVER .request	Bulk data transfer	F-LOCATE .request	F-ERASE .request	Terminate FTAM Regime
FTAM regime established		Recover				Kernel
F-CHANGE-PREFIX.request						
F-CHANGE-PREFIX.confirm		Recover				Kernel
F-LIST.request						
F-LIST.confirm		Recover				Kernel
F-GROUP-SELECT.request						
F-GROUP-SELECT.confirm (+ve)						
F-GROUP-SELECT.confirm (-ve)		Recover				Kernel
F-GROUP-DELETE.request						
F-GROUP-DELETE.confirm		Recover				Kernel
F-GROUP-COPY.request						
F-GROUP-COPY.confirm						
F-GROUP-MOVE.request						
F-GROUP-MOVE.confirm						
F-GROUP-LIST.request						
F-GROUP-LIST.confirm						
F-GROUP-CHANGE-ATTRIB.request						
F-GROUP-CHANGE-ATTRIB.confirm						
F-SELECT.request	Grouping					
F-SELECT.confirm (+ve)						
F-SELECT.confirm (-ve)		Recover				Kernel
F-SELECT-ANOTHER.request	G-Grmn					
F-SELECT-ANOTHER.confirm (+ve)						
F-SELECT-ANOTHER.confirm (-ve)						
F-CREATE.request	Grouping					
F-CREATE.confirm (+ve)						
F-CREATE.confirm (-ve)		Recover				Kernel
F-CREATE-DIRECTORY.request	G-Efmg					
F-CREATE-DIRECTORY.confirm (+ve)						
F-CREATE-DIRECTORY.confirm (-ve)		Recover				Kernel
F-LINK.request	G-Efmg					
F-LINK.confirm (+ve)						
F-LINK.confirm (-ve)		Recover				Kernel
F-DESELECT.request	Grouping					
F-DESELECT.confirm		Recover				Kernel
F-DELETE.request	Grouping					
F-DELETE.confirm		Recover				Kernel
F-UNLINK.request	G-Efmg					
F-UNLINK.confirm		Recover				Kernel
F-READ-ATTRIB.request	Grouping					
F-READ-ATTRIB.confirm						
F-CHANGE-ATTRIB.request	Grouping					
F-CHANGE-ATTRIB.confirm						
F-READ-LINK-ATTRIB.request	G-Efmg					

Table 9 – Sequence of service primitives for file service regimes – initiator (continued)

Previous file service event	F-END-GROUP .request	F-RECOVER .request	Bulk data transfer	F-LOCATE .request	F-ERASE .request	Terminate FTAM Regime
F-READ-LINK-ATTRIB.confirm						
F-CHANGE-LINK-ATTRIB.request	G-Efmg					
F-CHANGE-LINK-ATTRIB.confirm						
F-COPY.request	G-Obmn					
F-COPY.confirm						
F-MOVE.request	G-Obmn					
F-MOVE.confirm						
F-OPEN.request	Grouping					
F-OPEN.confirm (+ve)			Kernel	Access	Access	
F-OPEN.confirm (-ve)						
F-CLOSE.request						
F-CLOSE.confirm						
F-BEGIN-GROUP.request						
F-BEGIN-GROUP.confirm						
F-END-GROUP.request						
F-END-GROUP.confirm		Recover [1]	Kernel [3]	Access [3]	Access [3]	Kernel [1]
F-RECOVER.request						
F-RECOVER.confirm (+ve)			Kernel	Access	Access	
F-RECOVER.confirm (-ve)		Recover				Kernel
Bulk data transfer			Kernel	Access	Access	
F-LOCATE.request						
F-LOCATE.confirm			Kernel	Access	Access	
F-ERASE.request						
F-ERASE.confirm			Kernel	Access	Access	

Table 10 – Sequence of service primitives for file service regimes – responder

Previous file service event	F-CHANGE-PREFIX .response	F-LIST .response	F-GROUP-SELECT .response	F-GROUP-DELETE response	F-GROUP-COPY.response	F-GROUP-MOVE.response
FTAM regime established						
F-CHANGE-PREFIX.indication	Lfmg					
F-CHANGE-PREFIX.response						
F-LIST.indication		Lfmg				
F-LIST.response						
F-GROUP-SELECT.indication			Grmn			
F-GROUP-SELECT.response (+ve)						
F-GROUP-SELECT.response (-ve)						
F-GROUP-DELETE.indication				Grmn		
F-GROUP-DELETE.response						
F-GROUP-COPY.indication					Grmg	
F-GROUP-COPY.response						
F-GROUP-MOVE.indication						Grmn
F-GROUP-MOVE.response						
F-GROUP-LIST.indication						
F-GROUP-LIST.response						
F-GROUP-CHANGE-ATTRIB.indication						
F-GROUP-CHANGE-ATTRIB.response						
F-SELECT.indication						
F-SELECT.response (+ve)						
F-SELECT.response (-ve)						
F-SELECT-ANOTHER.indication						
F-SELECT-ANOTHER.response (+ve)						
F-SELECT-ANOTHER.response (-ve)						
F-CREATE.indication						
F-CREATE.response (+ve)						
F-CREATE.response (-ve)						
F-CREATE-DIRECTORY.indication						
F-CREATE-DIRECTORY.response (+ve)						
F-CREATE-DIRECTORY.response (-ve)						
F-LINK.indication						
F-LINK.response (+ve)						
F-LINK.response (-ve)						
F-DESELECT.indication						
F-DESELECT.response						
F-DELETE.indication						
F-DELETE.response						
F-UNLINK.indication						
F-UNLINK.response						
F-READ-ATTRIB.indication						
F-READ-ATTRIB.response						
F-CHANGE-ATTRIB.indication						
F-CHANGE-ATTRIB.response						
F-READ-LINK-ATTRIB.indication						

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-CHANGE-PREFIX .response	F-LIST .response	F-GROUP-SELECT .response	F-GROUP-DELETE .response	F-GROUP-COPY.response	F-GROUP-MOVE.response
F-READ-LINK-ATTRIB.response						
F-CHANGE-LINK-ATTRIB.indication						
F-CHANGE-LINK-ATTRIB.response						
F-COPY.indication						
F-COPY.response						
F-MOVE.indication						
F-MOVE.response						
F-OPEN.indication						
F-OPEN.response (+ve)						
F-OPEN.response (-ve)						
F-CLOSE.indication						
F-CLOSE.response						
F-BEGIN-GROUP.indication						
F-BEGIN-GROUP.response						
F-END-GROUP.indication						
F-END-GROUP.response						
F-RECOVER.indication						
F-RECOVER.response (+ve)						
F-RECOVER.response (-ve)						
Bulk data transfer						
F-LOCATE.indication						
F-LOCATE.response						
F-ERASE.indication						
F-ERASE.response						

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-GROUP- LIST.response	F-GROUP- CHANGE- ATTRIB.response	F-SELECT .response	F-SELECT- ANOTHER .response	F-CREATE .response	F-CREATE- DIRECTORY .response	F-LINK .response
FTAM regime established							
F-CHANGE-PREFIX.indication							
F-CHANGE-PREFIX.response							
F-LIST.indication							
F-LIST.response							
F-GROUP-SELECT.indication							
F-GROUP-SELECT.response (+ve)							
F-GROUP-SELECT.response (-ve)							
F-GROUP-DELETE.indication							
F-GROUP-DELETE.response							
F-GROUP-COPY.indication							
F-GROUP-COPY.response							
F-GROUP-MOVE.indication							
F-GROUP-MOVE.response							
F-GROUP-LIST.indication	Grmn						
F-GROUP-LIST.response							
F-GROUP-CHANGE-ATTRIB.indication		Grmn					
F-GROUP-CHANGE-ATTRIB.response							
F-SELECT.indication			Kernel Lfmgt				
F-SELECT.response (+ve)							
F-SELECT.response (-ve)							
F-SELECT-ANOTHER.indication				Grmn			
F-SELECT-ANOTHER.response (+ve)							
F-SELECT-ANOTHER.response (-ve)							
F-CREATE.indication					Lmgt		
F-CREATE.response (+ve)							
F-CREATE.response (-ve)							
F-CREATE-DIRECTORY.indication						Efmgt	
F-CREATE-DIRECTORY.response (+ve)							
F-CREATE-DIRECTORY.response (-ve)							
F-LINK.indication							Efmgt
F-LINK.response (+ve)							
F-LINK.response (-ve)							
F-DESELECT.indication							
F-DESELECT.response							
F-DELETE.indication							
F-DELETE.response							
F-UNLINK.indication							
F-UNLINK.response							
F-READ-ATTRIB.indication							
F-READ-ATTRIB.response							
F-CHANGE-ATTRIB.indication							
F-CHANGE-ATTRIB.response							
F-READ-LINK-ATTRIB.indication							

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-GROUP- CHANGE- ATTRIB.response	F-GROUP- LIST.response	F-SELECT .response	F-SELECT- ANOTHER .response	F-CREATE .response	F-CREATE- DIRECTORY .response	F-LINK .response
F-READ-LINK-ATTRIB.response							
F-CHANGE-LINK-ATTRIB.indication							
F-CHANGE-LINK-ATTRIB.response							
F-COPY.indication							
F-COPY.response							
F-MOVE.indication							
F-MOVE.response							
F-OPEN.indication							
F-OPEN.response (+ve)							
F-OPEN.response (-ve)							
F-CLOSE.indication							
F-CLOSE.response							
F-BEGIN-GROUP.indication							
F-BEGIN-GROUP.response			Grouping	G-Grmn	G-Lmgt	G-Efmg	G-Efmg
F-END-GROUP.indication							
F-END-GROUP.response							
F-RECOVER.indication							
F-RECOVER.response (+ve)							
F-RECOVER.response (-ve)							
Bulk data transfer							
F-LOCATE.indication							
F-LOCATE.response							
F-ERASE.indication							
F-ERASE.response							

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-DESELECT .response	F-DELETE .response	F-UNLINK .response	F-READ- ATTRIB .response	F-CHANGE- ATTRIB .response	F-READ- LINK-ATTRIB .response
FTAM regime established						
F-CHANGE-PREFIX.indication						
F-CHANGE-PREFIX.response						
F-LIST.indication						
F-LIST.response						
F-GROUP-SELECT.indication						
F-GROUP-SELECT.response (+ve)						
F-GROUP-SELECT.response (-ve)						
F-GROUP-DELETE.indication						
F-GROUP-DELETE.response						
F-GROUP-COPY.indication						
F-GROUP-COPY.response						
F-GROUP-MOVE.indication						
F-GROUP-MOVE.response						
F-GROUP-LIST.indication						
F-GROUP-LIST.response						
F-GROUP-CHANGE-ATTRIB.indication						
F-GROUP-CHANGE-ATTRIB.response						
F-SELECT.indication						
F-SELECT.response (+ve)	Grouping G-Lfmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-SELECT.response (-ve)						
F-SELECT-ANOTHER.indication						
F-SELECT-ANOTHER.response (+ve)	Grouping G-Lfmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-SELECT-ANOTHER.response (-ve)						
F-CREATE.indication						
F-CREATE.response (+ve)	Grouping	G-Lmgt		G-Lmgt	G-Emgt	
F-CREATE.response (-ve)						
F-CREATE-DIRECTORY.indication						
F-CREATE-DIRECTORY.response(+ve)	Grouping G-Efmg	G-Efmg		G-Efmg	G-Efmg	
F-CREATE-DIRECTORY.response (-ve)						
F-LINK.indication						
F-LINK.response (+ve)	Grouping G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Efmg
F-LINK.response (-ve)						
F-DESELECT.indication	Kernel Lfmg					
F-DESELECT.response						
F-DELETE.indication		Lmgt Efmg				
F-DELETE.response						
F-UNLINK.indication			Efmg			
F-UNLINK.response						
F-READ-ATTRIB.indication				Lmgt Lfmg		
F-READ-ATTRIB.response	Grouping G-Lfmg	G-Lmgt G-Efmg	G-Efmg		G-Emgt G-Efmg	G-Lfmg
F-CHANGE-ATTRIB.indication					Emgt Efmg	
F-CHANGE-ATTRIB.response	Grouping G-Efmg	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Efmg	G-Emgt G-Efmg	G-Efmg
F-READ-LINK-ATTRIB.indication						Lfmg

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-DESELECT .response	F-DELETE .response	F-UNLINK .response	F-READ- ATTRIB .response	F-CHANGE- ATTRIB .response	F-READ- LINK-ATTRIB .response
F-READ-LINK-ATTRIB.response	G-Lfmg G-Efmg	G-Lmgt G-Lfmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-CHANGE-LINK-ATTRIB.indication						
F-CHANGE-LINK-ATTRIB.response	G-Lfmg G-Efmg	G-Efmg	G-Efmg	G-Efmg	G-Emgt	G-Efmg
F-COPY.indication						
F-COPY.response	G-Lfmg Grouping	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-MOVE.indication						
F-MOVE.response	G-Lfmg Grouping	G-Lmgt G-Efmg	G-Efmg	G-Lmgt G-Lfmg	G-Emgt G-Efmg	G-Lfmg
F-OPEN.indication						
F-OPEN.response (+ve)						
F-OPEN.response (-ve)						
F-CLOSE.indication						
F-CLOSE.response	Grouping	G-Lmgt	G-Efmg	G-Lmgt	G-Emgt	G-Lfmg
F-BEGIN-GROUP.indication						
F-BEGIN-GROUP.response	G-Lfmg Group[2]	G-Lmgt[2] G-Efmg	G-Efmg [2]	G-Lmgt[6] G-Lfmg	G-emgt[6] G-efmg	G-Lfmg [2]
F-END-GROUP.indication						
F-END-GROUP.response						
F-RECOVER.indication						
F-RECOVER.response (+ve)						
F-RECOVER.response (-ve)						
Bulk data transfer						
F-LOCATE.indication						
F-LOCATE.response						
F-ERASE.indication						
F-ERASE.response						

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-CHANGE-LINK-ATTRIB .response	F-COPY .response	F-MOVE .response	F-OPEN .response	F-CLOSE .response	F-BEGIN- GROUP .response
ETAM regime established						
F-CHANGE-PREFIX.indication						
F-CHANGE-PREFIX.response						
F-LIST.indication						
F-LIST.response						
F-GROUP-SELECT.indication						
F-GROUP-SELECT.response (+ve)						
F-GROUP-SELECT.response (-ve)						
F-GROUP-DELETE.indication						
F-GROUP-DELETE.response						
F-GROUP-COPY.indication						
F-GROUP-COPY.response						
F-GROUP-MOVE.indication						
F-GROUP-MOVE.response						
F-GROUP-LIST.indication						
F-GROUP-LIST.response						
F-GROUP-CHANGE-ATTRIB.indication						
F-GROUP-CHANGE-ATTRIB.response						
F-SELECT.indication						
F-SELECT.response (+ve)	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-SELECT.response (-ve)						
F-SELECT-ANOTHER.indication						
F-SELECT-ANOTHER.response (+ve)	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-SELECT-ANOTHER.response (-ve)						
F-CREATE.indication						
F-CREATE.response (+ve)		G-Obmn	G-Obmn	Grouping		
F-CREATE.response (-ve)						
F-CREATE-DIRECTORY.indication						
F-CREATE-DIRECTORY.response (+ve)		G-Obmn	G-Obmn			
F-CREATE-DIRECTORY.response (-ve)						
F-LINK.indication						
F-LINK.response (+ve)	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-LINK.response (-ve)						
F-DESELECT.indication						
F-DESELECT.response						
F-DELETE.indication						
F-DELETE.response						
F-UNLINK.indication						
F-UNLINK.response						
F-READ-ATTRIB.indication						
F-READ-ATTRIB.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-CHANGE-ATTRIB.indication						
F-CHANGE-ATTRIB.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-READ-LINK-ATTRIB.indication						

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-CHANGE-LINK-ATTRIB .response	F-COPY .response	F-MOVE .response	F-OPEN .response	F-CLOSE .response	F-BEGIN- GROUP .response
F-READ-LINK-ATTRIB.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-CHANGE-LINK-ATTRIB.indication	Efmg					
F-CHANGE-LINK-ATTRIB.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-COPY.indication		Obmn				
F-COPY.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-MOVE.indication			Obmn			
F-MOVE.response	G-Efmg	G-Obmn	G-Obmn	Grouping		
F-OPEN.indication				Kernel		
F-OPEN.response (+ve)					Grouping	
F-OPEN.response (-ve)						
F-CLOSE.indication					Kernel	
F-CLOSE.response	G-Efmg	G-Obmn	G-Obmn			
F-BEGIN-GROUP.indication						
F-BEGIN-GROUP.response	G-Efmg [2]	G-Obmn [2]	G-Obmn [2]		Grouping [3]	
F-END-GROUP.indication						Grouping
F-END-GROUP.response						
F-RECOVER.indication						
F-RECOVER.response (+ve)						
F-RECOVER.response (-ve)						
Bulk data transfer						
F-LOCATE.indication						
F-LOCATE.response						
F-ERASE.indication						
F-ERASE.response						

Table 10 – Sequence of service primitives for file service regimes – responder (continued)

Previous file service event	F-END-GROUP .response	F-RECOVER .response	Bulk data transfer	F-LOCATE .response	F-ERASE .response	Terminate FTAM Regime
FTAM regime established						
F-CHANGE-PREFIX.indication						
F-CHANGE-PREFIX.response						
F-LIST.indication						
F-LIST.response						
F-GROUP-SELECT.indication						
F-GROUP-SELECT.response (+ve)						
F-GROUP-SELECT.response (-ve)						
F-GROUP-DELETE.indication						
F-GROUP-DELETE.response						
F-GROUP-COPY.indication						
F-GROUP-COPY.response						
F-GROUP-MOVE.indication						
F-GROUP-MOVE.response						
F-GROUP-LIST.indication						
F-GROUP-LIST.response						
F-GROUP-CHANGE-ATTRIB.indication						
F-GROUP-CHANGE-ATTRIB.response						
F-SELECT.indication						
F-SELECT.response (+ve)	Grouping					
F-SELECT.response (-ve)	Grouping					
F-SELECT-ANOTHER.indication						
F-SELECT-ANOTHER.response (+ve)	Grouping					
F-SELECT-ANOTHER.response (-ve)	Grouping					
F-CREATE.indication						
F-CREATE.response (+ve)	Grouping					
F-CREATE.response (-ve)	Grouping					
F-CREATE-DIRECTORY.indication						
F-CREATE-DIRECTORY.response (+ve)	Grouping					
F-CREATE-DIRECTORY.response (-ve)	Grouping					
F-LINK.indication						
F-LINK.response (+ve)	Grouping					
F-LINK.response (-ve)	Grouping					
F-DESELECT.indication						
F-DESELECT.response	Grouping					
F-DELETE.indication						
F-DELETE.response	Grouping					
F-UNLINK.indication						
F-UNLINK.response	Grouping					
F-READ-ATTRIB.indication						
F-READ-ATTRIB.response	Grouping					
F-CHANGE-ATTRIB.indication						
F-CHANGE-ATTRIB.response	Grouping					
F-READ-LINK-ATTRIB.indication						

Table 10 – Sequence of service primitives for file service regimes – responder (concluded)

Previous file service event	F-END-GROUP .response	F-RECOVER .response	Bulk data transfer	F-LOCATE .response	F-ERASE .response	Terminate FTAM Regime
F-READ-LINK-ATTRIB.response	Grouping					
F-CHANGE-LINK-ATTRIB.indication						
F-CHANGE-LINK-ATTRIB.response	Grouping					
F-COPY.indication						
F-COPY.response	Grouping					
F-MOVE.indication						
F-MOVE.response	Grouping					
F-OPEN.indication						
F-OPEN.response (+ve)	Grouping					
F-OPEN.response (-ve)	Grouping					
F-CLOSE.indication						
F-CLOSE.response						
F-BEGIN-GROUP.indication						
F-BEGIN-GROUP.response						
F-END-GROUP.indication						
F-END-GROUP.response						
F-RECOVER.indication		Recover				
F-RECOVER.response (+ve)						
F-RECOVER.response (-ve)						
Bulk data transfer						
F-LOCATE.indication				Access		
F-LOCATE.response						
F-ERASE.indication					Access	
F-ERASE.response						

13 Common file service parameters

13.5 Attributes

(amend 1st paragraph, page 20)

The attributes parameter conveys a list of object attribute names and object attribute values associated with the object. It also may convey a pathname used to access the object. F-INITIALIZE negotiates the attribute groups which are available for the duration of the FTAM regime. Subsequent primitives only use those attributes which were negotiated.

NOTE – The pathname element (not to be confused with the primary pathname element) of the attributes parameter is not an object attribute. An object may be accessible by several pathnames. The pathname element conveys the actual pathname identifying the object, and is used in conjunction with the current pathname activity attribute. It is used to change the object name attribute, and may effect the primary pathname attribute.

The object name attribute may be derived from the last graphicstring element in the pathname vector. If the object is being accessed by a reference, the object name will be that of the reference object, not the target object.

(amend 2nd paragraph, page 20)

On primitives other than F-SELECT issued by the initiator, the parameter conveys new values to be assigned to the object attributes. On primitives issued by the responder, the parameter reports the current values of the object attributes, or indications that there is no value available.

(amend 3rd paragraph, page 20)

The pathname element does not always correspond to the primary pathname object attribute. For existing objects, this element identifies a given object by any valid pathname, and sets the current pathname activity identifier. The pathname element on F-SELECT identifies the object to be selected, or on F-CREATE the pathname of the object to be created and selected. In the request and indication primitives it indicates the object required, and in the response and confirm primitives it indicates the object actually selected.

NOTES

- 1) If, for example, the object pathname requested gave a generic name or a generation name, the name selected might differ from that requested.

- 2) The pathname specified on create actions will not necessarily be the primary pathname of the object being created.

(amend 4th paragraph, page 20)

The object attributes; the range of values they may take and the actions to be taken are defined in the virtual filestore definition (ISO 8571-2). Annex B specifies which object attributes may be manipulated by each primitive.

13.6 Requested access

(amend 1st paragraph, page 20)

The requested access parameter indicates how objects affected by the operation will be accessed. The value gives, as a vector, the actions to be performed on objects affected by the service. The elements of the vector correspond to the read, insert, replace, extend, erase, read attribute, change attribute, and delete object actions, and each element indicates whether the action is required or not.

(amend 2nd paragraph's note, page 20)

NOTE – When objects are targeted for selection, either individually by a select regime establishment or recovery actions, or by a generalized selection regime, the requested access parameter is used to state the maximum facilities the current user will require during the whole select regime. These access requirements may be password protected by the access control object attribute which is matched to the access passwords parameter (see clause 13.7).

(amend 3rd paragraph, page 21)

The requested access may be further qualified by any concurrency control requested, which specifies how multiple users are to be restricted when requiring access to the same file object. The requested access parameter includes only those actions to be performed by the user; any action not included is not available later in the select regime.

(amend 4th paragraph, page 21)

The relationship between attributes and actions is detailed in ISO 8571-2. This parameter is used to set the current access request activity attribute, or in a generalized selection service, the generalized access request activity attribute.

13.7 Access passwords

(amend 1st paragraph, page 21)

The access passwords parameter provides passwords associated with the actions specified in the requested access parameter. Passwords for both the object's access controls and the specified pathname's path access controls may be specified. This parameter is only available if the security attribute group has been negotiated. The range of values the parameter takes is equal to that defined for the current access passwords activity attribute. This parameter is used to set the current access passwords activity attribute, or in a generalized selection service, the generalized access passwords activity attribute.

13.8 Concurrency control

(append after 1st paragraph, page 21)

NOTE – Concurrency control in this standard is only defined for actions on file object contents.

(append after clause 13.13, page 22)

13.14 Attribute names

The attribute names parameter indicates which object attributes from the kernel or negotiated attribute groups, given in the virtual filestore definition, are to be read. The parameter is a list, each element of which names an object attribute defined for any object type, as in ISO 8571-2. This parameter is not used to set any activity attributes.

13.15 Attribute value assertions

The attribute value assertions parameter consists of an attribute value assertion list. Its value is a set of legally related lists of attribute patterns that are used for matching objects. When used in conjunction with the generalized selection mechanism, the results of this parameter are used to set the generalized selection group activity attributes.

13.16 Create password

The create password is an optional parameter which may be required to establish that the user identified by the initiator identity parameter of the FTAM regime establishment service has permission to create objects in the current filestore. This parameter is not used to set any activity attributes.

13.17 Destination file-directory

The destination file-directory parameter is used to identify a target destination for one or more operations. The range of values this parameter may take is that for a valid pathname. The pathname must identify an existing file-directory object within the current filestore. This parameter does not set any activity attributes except when used with the change current name prefix

service, in which case it affects the current name prefix activity attribute.

13.18 Objects attributes list

The objects attributes list parameter consists of a set of object attribute lists, as defined in clause 13.5. This parameter is returned as a part of a response or confirm primitive. It does not set any activity attributes.

13.19 Override

The override parameter defined the action to be taken if the named object already exists. The values of the parameter are:

- a) fail the create action if the object already exists;
- b) select the object if it already exists;
- c) delete the object if it already exists and create a new object using the old object's attributes (effectively erase any contents of the existing object and select it);
- d) delete the object if it already exists and create a new object using the initial attributes provided on the filestore service primitive.

The values (c) and (d) are dependent upon the provision of a delete password in the access passwords parameter where required by the access control attribute of the existing object. Not every creation service supports every override option. This parameter is not used to set any activity attributes.

13.20 Error Action

The error action parameter is used by services dealing with more than one object at a time via the generalized selection group. It carries instructions as to how to proceed when an error is detected by the responder. This parameter may take on the following values:

- a) terminate – this value indicates that if an error is detected during the service, that all processing should cease, the action result should indicate the error encountered, and suitable diagnostics be returned. Any actions taken up to the point of error detection are not rolled back.
- b) continue – this value indicates that if an error is detected during the service, that the service continue with the next object in the generalized selection list. Upon completion of the service, the action result should contain an informational message noting that one or more errors had occurred, and one or more diagnostic messages should be generated for each object for which an error was encountered.

13.21 Last member indicator

The Last Member indicator parameter is used by the responder on F-SELECT-ANOTHER primitive, to indicate that the currently selected object is last in the group of objects selected through generalized selection. This parameter can be set by the responder to indicate to the initiator that the next select request may result in a selection of an object with a previously selected pathname from the pathname group.

13.22 Scope

The scope parameter is used by the initiator to indicate the scope of objects for retrieving, on F-LIST and F-GROUP-SELECT services. It specifies the root file-directory of the retrieval scope, which may be a subtree in the whole filestore, by means of a complete or incomplete pathname (a reference object linked to a file-directory is allowed, in which case the referenced file-directory is a root of the retrieval scope subtree). It also indicates whether the retrieval scope is direct child objects of the specified root file-directory or all descendants within the whole subtree.

13.23 Referent Indicator

The referent indicator parameter is used by the responder in F-SELECT-ANOTHER (and F-SELECT) primitives to indicate that the currently selected object has been selected such that the last object in the pathname is a reference. This parameter may be set to true by the responder to indicate that the current pathname used is a reference. Note that the parameter is optional in all cases to allow for responders to conceal the existence of references for security purposes.

13.24 Request operation result

The request operation result parameter is used by the initiator on the F-GROUP-DELETE, F-GROUP-MOVE and F-GROUP-COPY primitives to indicate that result of the operations within the grouped services be returned. The value of this parameter is set by the initiator to request either an overall summary of the operation or the list of original pathnames successfully acted upon in the service.

13.25 Operation result

The operation result parameter is used by the responder on F-GROUP-DELETE, F-GROUP-MOVE and F-GROUP-COPY primitives to return the result of the operations within these group services. The value will be a choice of either the number of the files successfully acted upon or the complete list of the original pathnames.

14.1.2.12 Functional units

(amend 1st paragraph, page 24)

The requested functional units parameter negotiates the set of file service functional units, excluding the kernel, to be available from the negotiated service class on the application association (see clauses 8.1 and 10.3). On the request and indication primitives the parameter carries the full functional unit capability of the initiator. On the response and confirm primitives it carries all the functional units to be available on the association. When the required service class permits, the set may contain the optional functional units "read", "write", "file access", "limited file management", "enhanced file management", "limited filestore management", "enhanced filestore management", "object manipulation", "group manipulation", "grouping", and "FADU locking". For use by the internal file service, if the service class permits, it may also contain the "recovery" and "restart" functional units. The recovery and restart functional units are only visible in the IFS and are thus never explicitly requested in the external file service. They are indirectly requested via the FTAM quality of service parameter (see clause 10.2). This parameter is not used to set any activity attributes

(insert prior to clause 15, page 27)

14a Filestore services

These services provide filestore management capability to the file service user. They are not concerned with the establishment of regimes. The services provide facilities for interrogation of pathnames and attributes of objects in the filestore, and modification of the current name prefix activity attribute.

14a.1 Change current name prefix

14a.1.1 Function

This service changes the responder's value of the current name prefix activity attribute by specifying a pathname of a file-directory object within the virtual filestore. This primitive may only be issued outside of any object selection regime. Upon receiving the F-CHANGE-PREFIX indication, the responder verifies that the indicated file-directory exists, the initiator has "pass" access through the pathname specified, and the initiator has at least one object access permission ("read", "insert", "replace", "extend", "erase", "read attribute", "change attribute", "delete", or "link") when using that pathname. If these three conditions are met, the responder changes its current name prefix activity attribute to that pathname. The result of the operation is then returned to the initiator by means of the F-CHANGE-PREFIX response primitive's action result parameter.

14a.1.2 Types of primitives and parameters

Table 14a indicates the types of primitives and the parameters needed for changing the current name prefix.

14a.1.2.1 Action result

The action result parameter is defined in clause 13.2.

14a.1.2.2 Destination file-directory

The destination file-directory parameter is defined in clause 13.17. It identifies an existing file-directory object to which the current name prefix activity attribute is to be set. The responding application may optionally return a value confirming the newly set current name prefix.

14a.1.2.3 Reset

The reset parameter is a boolean value indicating whether a destination file-directory in the format of an incomplete pathname should be resolved from the existing current name prefix, or from the current name prefix assigned at the creation of the FTAM regime. When the destination file directory is specified in the form of a complete pathname the reset parameter is not significant. A value of true implies that the current name prefix should be reset to the current name prefix assigned at the creation of the FTAM regime prior to attempting to set it from the supplied destination file-directory parameter.

Note that a reset value of true and a destination file-directory value of an incomplete pathname containing no elements resets the current name prefix to the value assigned at the creation of the FTAM regime.

14a.1.2.4 Access passwords

The access passwords parameter is defined in clause 13.7. This parameter is used to establish access rights to the specified directory by the filestore user identified on the F-INITIALIZE service primitive. This parameter does not set any activity attributes, nor is any access assumed in any later services based on the value of this parameter.

14a.1.2.5 Diagnostic

The diagnostic parameter is defined in clause 13.13.

14a.2 List file-directory

Table 14a – F-CHANGE-PREFIX parameters

Parameter	F-CHANGE-PREFIX request	F-CHANGE-PREFIX indication	F-CHANGE-PREFIX response	F-CHANGE-PREFIX confirm
Action result			Mandatory	Mandatory
Destination file-directory	Mandatory	Mandatory(=)	Optional	Optional(=)
Reset	Mandatory	Mandatory(=)		
Access passwords	Optional	Optional(=)		
Diagnostic			Optional	Optional

Table 14b – F-LIST parameters

Parameter	F-LIST request	F-LIST indication	F-LIST response	F-LIST confirm
Action result			Mandatory	Mandatory
Attribute value assertions	Mandatory	Mandatory(=)		
Access passwords	Optional	Optional(=)		
Attribute names	Mandatory	Mandatory(=)		
Scope	Mandatory	Mandatory(=)		
Objects			Conditional	Conditional(=)
attributes list			Optional	Optional
Diagnostic				

14a.2.1 Function

This service enumerates objects whose attributes satisfy the attribute value assertions given. The request and indication service primitives convey an attribute value assertion list. The action fails if

- no object exists as specified by the attribute value assertion list;
- the attribute value assertion list references attributes from attribute groups that were not successfully negotiated.

Upon receiving the F-LIST indication, the filestore provider searches the filestore for objects conforming to the attribute value assertion list, and reads the requested attributes of each object identified. The results are then reported by issuing the F-LIST response primitive.

NOTES

- According to the definition of the attribute value assertion list search mechanism (ISO 8571-2, clause 9a), objects to which this filestore user does not have read-attribute access are not reported, as well as any objects under file-directories to which the filestore user does not have pass and read access permission.
- This service does not detect duplications of objects due to multiple pathnames. If the same object is accessible by multiple pathnames, and more than one of the pathnames conform to the attribute value assertion list, then the object will be reported on multiple times, once by each conforming pathname.
- It should not be considered a requirement that the entire real filestore be searched for objects conforming to an attribute value assertion list. Real implementations may incorporate search optimizations, such as limiting the scope of the search to file-directories described in the attribute value assertion list.

14a.2.2 Types of primitives and parameters

Table 14b indicates the types of primitives and the parameters needed for listing the contents of directories.

14a.2.2.1 Action result

The action result parameter is defined in clause 13.2.

14a.2.2.2 Attribute value assertions

The attribute value assertions parameter is defined in clause 13.15. It is used to restrict the list of objects to those which match the attribute value assertion list.

14a.2.2.3 Access passwords

The access passwords parameter is defined in clause 13.7. It is used to establish read-attribute access permission to the objects being listed, and read access permission to the file-directories containing them.

14a.2.2.4 Attribute names

The attribute names parameter is defined in clause 13.14.

14a.2.2.5 Objects attributes list

The objects attributes list parameter is defined in clause 13.18. It is used to return the list of objects conforming to the attribute value assertion list, and their corresponding attributes. The presence of the object attributes list parameter is conditional on the inclusion in the attribute names parameter of at least one attribute with a returnable value.

14a.2.2.6 Scope

This parameter is described in clause 13.22.

14a.2.2.7 Diagnostic

The diagnostic parameter is defined in clause 13.13.

14b Generalized filestore services

These services provide the mechanism for identifying a group of object pathnames by attribute value assertions, then operating on the objects identified by the group as a whole. They can be moved to a different location within the filestore, duplicated within the filestore, their attributes can be modified, or the pathnames of the group can be interrogated.

Members of the identified group can also be operated on individually under the object select regime.

14b.1 Generalized selection

14b.1.1 Function

The generalized selection service identifies a group of pathnames matching a given attribute value assertions list. Only existing objects of type 'file' and references to objects of type 'file' are considered for generalized selection. The group of pathnames identified consists of all pathnames:

- a) whose object attributes satisfy the given attribute value assertion list; and
- b) for which the initiating user demonstrates authorization for access to the identified object. Generalized selection fails if there are no objects that satisfy the given attribute value assertions.

NOTES

- 1) According to the definition of the attribute value assertion list search mechanism (ISO 8571-2, clause 9a), objects to which this filestore user does not have read-attribute access are not included, as well as any objects under file-directories to which the filestore user does not have pass and read access permission.
- 2) This service does not detect duplications of objects due to multiple pathnames. If the same object is accessible by multiple pathnames, and more than one of the pathnames conform to the attribute value assertion list, then the object will be included multiple times, once by each conforming pathname.
- 3) It should not be considered a requirement that the entire real filestore be searched for objects conforming to an attribute value assertion list. Real implementations may incorporate search optimizations, such as limiting the scope of the search to file-directories described in the attribute value assertion list.

These primitives may only be issued within an FTAM regime. No other regimes may be currently established when issuing this service. The filestore provider performs the generalized selection action after receiving the F-GROUP-SELECT indication and before issuing an F-GROUP-SELECT response primitive with an action result indicating success.

14b.1.2 Types of primitives and parameters

Table 14c indicates the types of primitives and the parameters needed for generalized selection.

14b.1.2.1 Action result

The action result parameter is defined in clause 13.2.

14b.1.2.2 State result

The state result parameter is defined in clause 13.1.

14b.1.2.3 Attribute value assertions

The attribute value assertions parameter is defined in clause 13.15. This attribute value assertion list identifies the group of pathnames used to set the generalized select group activity attribute.

14b.1.2.4 Requested access

The Requested access parameter is defined in clause 13.6. This parameter is used to identify actions that may be performed on the objects identified by the pathnames considered for the generalized select group. When taken in conjunction with the access passwords parameter, pathnames included in the group must identify objects for which the initiating filestore user has permissions for the access requested.

This parameter also sets the generalized access request activity attribute, used to establish select regimes on objects taken from the generalized select group.

14b.1.2.5 Access passwords

The access passwords parameter is defined in clause 13.7. Its presence is conditional on the security attribute group being successfully negotiated. This parameter is used to verify access permission to the objects identified by the generalized select group. It also sets the generalized access passwords activity attribute, used to establish select regimes on objects taken from the generalized select group.

14b.1.2.6 Concurrency control

The concurrency control parameter is defined in clause 13.8. No concurrency control is set during the establishment of the generalized selection regime.

Table 14c – F-GROUP-SELECT parameters

Parameter	F-GROUP-SELECT request	F-GROUP-SELECT indication	F-GROUP-SELECT response	F-GROUP-SELECT confirm
Action result			Mandatory	Mandatory
Attribute value assertions	Mandatory	Mandatory(=)		
Requested access	Mandatory	Mandatory(=)		
Access passwords	Conditional	Conditional(=)		
Concurrency control	Optional	Optional(=)		
Maximum set size	Optional	Optional(=)		
Scope	Mandatory	Mandatory(=)		
Account	Optional	Optional(=)		
Shared ASE information			Optional	Optional(=)
Diagnostic	Optional	Optional(=)	Optional	Optional

This parameter is only used to set the generalized concurrency control activity attribute, used to establish select regimes on objects taken from the generalized select group.

14b.1.2.7 Maximum set size

The maximum set size parameter gives the maximum number of pathnames in the generalized select group that the initiator will handle. Its value is an integer. If no value is supplied, then no restriction is to be placed on the group size. If the number of pathnames in the generalized select group exceeds this bound, then the generalized selection regime is not established, no generalized select group is established, and an error is reported to the initiator.

14b.1.2.8 Account

The account parameter is defined in clause 13.3. The value given overrides any value previously set by the F-INITIALIZE request for the duration of the generalized selection regime. This account may be explicitly overridden in nested regimes.

14b.1.2.9 Shared ASE information

The shared ASE Information parameter is defined in clause 13.10.

14b.1.2.10 Diagnostic

The diagnostic parameter is defined in clause 13.13.

14b.1.2.11 Scope

This parameter is described in clause 13.22.

14b.2 Generalized deletion

14b.2.1 Function

Table 14d – F-GROUP-DELETE parameters

Parameter	F-GROUP-DELETE request	F-GROUP-DELETE indication	F-GROUP-DELETE response	F-GROUP-DELETE confirm
Action result			Mandatory	Mandatory
Charging			Conditional	Conditional(=)
Request operation result	Optional	Optional(=)		
Operation result			Conditional	Conditional(=)
Shared ASE information	Optional	Optional(=)	Optional	Optional(=)
Diagnostic			Optional	Optional

The F-GROUP-DELETE service removes the file objects and resets to null the generalized select group activity attribute value. The file objects are removed in such a way that the objects cease to exist and hence are not available for selection.

NOTE – Implementations should be aware that this is a destructive service and will delete all the files whose pathnames are in the current selection group from the filestore.

This primitive may only be used within the FTAM regime.

The filestore provider performs the generalized deletion action after receiving the F-GROUP-DELETE indication primitive, and before issuing the F-GROUP-DELETE response primitive.

14b.2.2 Types of primitives and parameters

Table 14d indicates the types of primitives and the parameters needed for generalized deletion.

14b.2.2.1 Action result

The action result parameter is defined in clause 13.2.

14b.2.2.2 Charging

The charging parameter is defined in clause 13.4. Charges are only reported against an overriding account set up at regime establishment.

14b.2.2.3 Request operation result

The request operation result parameter is defined in 13.24. This parameter is optional.

14b.2.2.4 Operation result

The operation result parameter is defined in 13.25. This parameter is conditional on the presence of the request operation result parameter.

14b.2.2.5 Shared ASE information

The shared ASE information parameter is defined in clause 13.10.

14b.2.2.6 Diagnostic

The diagnostic parameter is defined in clause 13.13.

14b.3 Group move

14b.3.1 Function

The F-GROUP-MOVE service moves the file objects identified by the generalized select group by changing their location in the filestore structure and resets to null the generalized select group activity attribute value.. The destination is specified by the destination file-

directory parameter. This parameter changes the primary pathname object attribute of all objects in the group. Other object attributes may also be changed by use of the attributes parameter.

Moving an object consists of entering a parenthood relationship for the given object into a named file-directory, removing the parenthood relationship for that object from the old parent file-directory for that object, and updating the primary pathname attribute of the object to reflect the new primary pathname.

When references to files exist in the generalized selection group, the file object is moved to the new location, not the reference.

Prior to moving each object, the filestore user identified in the F-INITIALIZE service (along with the access passwords in the generalized access passwords activity attribute) must have change-attribute permission to the object via the corresponding pathname. Also, the filestore user (along with the create password) must have permission to create objects in this filestore, and insert permission in the destination file-directory.

The F-GROUP-MOVE service is not an atomic action. Move operations are performed one at a time, until either an error occurs or the list of pathnames is exhausted. The error action parameter determines whether or not an error terminates the service. A shared ASE information parameter is provided for use should the use of some other ASE such as CCR be desired to form an atomic action from this service.

14b.3.2 Types of primitives and parameters

Table 14e indicates the types of primitives and the parameters needed for group move operations.

14b.3.2.1 Action result

The action result parameter is defined in clause 13.2.

14b.3.2.2 Destination file-directory

The destination file-directory parameter is defined in clause 13.17. It identifies the file-directory that should maintain the parenthood relationship to the objects identified by the pathnames in the generalized select group.

14b.3.2.3 Override

The override parameter is defined in clause 13.19 and only applies to the create part of the action. Only the following override options are supported for the F-GROUP-MOVE service:

- a) fail the action if the file already exists;

- b) delete the object if it already exists and create a new object using the initial attributes provided on the filestore service primitive.

14b.3.2.4 Error action

The error action parameter is described in clause 13.20.

14b.3.2.5 Request operation result

The request operation result parameter is defined in 13.24. This parameter is optional.

14b.3.2.6 Operation result

The operation result parameter is defined in 13.25. This parameter is conditional on the presence of the request operation result parameter.

14b.3.2.7 Create password

The create password parameter is described in clause 13.16.

14b.3.2.8 Access passwords

The access passwords parameter is described in clause 13.7. It is used to establish delete access to any objects which may be overridden by this service. The presence of the access passwords parameter is conditional on the successful negotiation of the security attribute group during the establishment of the FTAM regime.

14b.3.2.9 Attributes

The attributes parameter is described in clause 13.5. This parameter is used to set any additional attributes (other than primary pathname) on the objects being moved.

14b.3.2.10 Diagnostic

The diagnostic parameter is described in clause 13.13.

14b.4 Group copy

14b.4.1 Function

The F-GROUP-COPY service copies the file objects identified by the generalized select group by creating new objects with duplicate contents in the specified destination location in the filestore structure and the value of the generalized select group activity attribute remains unchanged. The destination is specified by the destination file-directory parameter. Object attributes may also be changed by use of the attributes parameter.

When references to files exist in the generalized selection group, the file object is duplicated into the new location, not the reference.

Prior to copying each object, the filestore user identified in the F-INITIALIZE service (along with the access passwords in the generalized access passwords activity attribute) must have read-attributes and read permission to the object via the corresponding pathname. Also, the filestore user (along with the create password) must have permission to create objects in this filestore, and insert permission in the destination file-directory.

The F-GROUP-COPY service is not an atomic action. Copy operations are performed one at a time, until either an error occurs or the list of pathnames is exhausted. The error action parameter determines whether or not an error terminates the service. A shared ASE information parameter is provided for use

Table 14e – F-GROUP-MOVE parameters

Parameter	F-GROUP-MOVE request	F-GROUP-MOVE indication	F-GROUP-MOVE response	F-GROUP-MOVE confirm
Action result			Mandatory	Mandatory
Destination file-directory	Mandatory	Mandatory(=)	Optional	Optional(=)
Override	Mandatory	Mandatory(=)		
Error action	Mandatory	Mandatory(=)		
Request operation result	Optional	Optional(=)		
Operation result			Conditional	Conditional(=)
Create password	Optional	Optional(=)		
Access passwords	Conditional	Conditional(=)		
Attributes	Optional	Optional(=)	Optional	Optional(=)
Diagnostic			Optional	Optional

Table 14f – F-GROUP-COPY parameters

Parameter	F-GROUP-COPY request	F-GROUP-COPY indication	F-GROUP-COPY response	F-GROUP-COPY confirm
Action result			Mandatory	Mandatory
Destination file-directory	Mandatory	Mandatory(=)	Optional	Optional(=)
Override	Mandatory	Mandatory(=)		
Error action	Mandatory	Mandatory(=)		
Request operation result	Optional	Optional(=)		
Operation result			Conditional	Conditional(=)
Create password	Optional	Optional(=)		
Access passwords	Conditional	Conditional(=)		
Attributes	Optional	Optional(=)		
Diagnostic			Optional	Optional

should the use of some other ASE such as CCR be desired to form an atomic action from this service.

14b.4.2 Types of primitives and parameters

Table 14f indicates the types of primitives and the parameters needed for group copy operations.

14b.4.2.1 Action result

The action result parameter is defined in clause 13.2.

14b.4.2.2 Destination file-directory

The destination file-directory parameter is defined in clause 13.17. It identifies the file-directory in which the duplicate objects are to be created.

14b.4.2.3 Override

The override parameter is defined in clause 13.19 and only applies to the create part of the action. Only the following override options are supported for the F-GROUP-COPY service:

- fail the action if the file already exists;
- delete the object if it already exists and create a new object using the initial attributes provided on the filestore service primitive.

14b.4.2.4 Error action

The error action parameter is described in clause 13.20.

14b.4.2.5 Request operation result

The request operation result parameter is defined in 13.24. This parameter is optional.

14b.4.2.6 Operation result

The operation result parameter is defined in 13.25. This parameter is conditional on the presence of the request operation result parameter.

14b.4.2.7 Create password

The create password parameter is described in clause 13.16.

14b.4.2.8 Access passwords

The access passwords parameter is described in clause 13.7. It is used to establish delete access to any objects which may be overridden by this service. The presence of the access passwords parameter is conditional on the successful negotiation of the security attribute group during the establishment of the FTAM regime.

14b.4.2.9 Attributes

The attributes parameter is described in clause 13.5. This parameter is used to set any additional attributes (other than primary pathname) on the object being copied.

14b.4.2.10 Diagnostic

The diagnostic parameter is described in clause 13.13.

14b.5 Group list

14b.5.1 Function

The F-GROUP-LIST service returns the set of pathnames maintained by the filestore provider in the generalized select group activity attribute, and selected object attributes of the represented objects.

Table 14g – F-GROUP-LIST

Parameter	F-GROUP-LIST request	F-GROUP-LIST indication	F-GROUP-LIST response	F-GROUP-LIST confirm
Action result	Mandatory	Mandatory(=)	Mandatory	Mandatory
Attribute names			Conditional Optional	Conditional(=) Optional
Objects attributes list				
Diagnostic				

Upon receiving the F-GROUP-LIST indication, the filestore provider reads the requested attributes of each object identified by pathname in the generalized select group. Any pathname for which access permission is denied is removed from the list without notification of the filestore user. The results are then reported by issuing the F-GROUP-LIST response primitive.

14b.5.2 Types of primitives and parameters

Table 14g indicates the types of primitives and the parameters needed for listing the generalized selection group.

14b.5.2.1 Action result

The action result parameter is described in clause 13.2.

14b.5.2.2 Attribute names

The attribute names parameter is described in clause 13.14.

14b.5.2.3 Objects attributes list

The objects attributes list parameter is described in clause 13.18. The presence of the object attributes list parameter is conditional on the inclusion in the attribute names parameter of at least one attribute with a returnable value.

14b.5.2.4 Diagnostic

The diagnostic parameter is described in clause 13.13.

14b.6 Group change attribute

14b.6.1 Function

The F-GROUP-CHANGE-ATTRIB service modifies the attributes of the file objects in the generalized select group. The primitive conveys a list of attribute names and values.

The filestore provider performs the change attribute action and sets the two object attributes, date and time of last attribute modifications and identity of last at-

tribute modifier, after receiving the F-GROUP-CHANGE-ATTRIB indication, and before issuing the F-GROUP-CHANGE-ATTRIB response primitive. If any change causes an action result other than success to be generated, none of the requested changes against the file are made. The action result for that file is "unsuccessful".

The F-GROUP-CHANGE-ATTRIB service is not an atomic action. Change attribute operations are performed one at a time, until either an error occurs or the list of pathnames is exhausted. The error action parameter determines whether or not an error terminates the service. A shared ASE information parameter is provided, should some other ASE, such as CCR, desire to form an atomic action using this service.

14b.6.2 Type of primitives and parameters

Table 14h indicates the types of primitives and the parameters needed to change attributes of grouped files.

14b.6.2.1 Action result

The action result parameter is defined in clause 13.2.

14b.6.2.2 Error Action

The error action parameter is defined in clause 13.20.

14b.6.2.3 Attribute

The attribute parameter, defined in 13.5, indicates on the request and indication primitives which object attributes given in the virtual filestore definition are to be changed and what the new values are. The parameter is a list, each element of which names a file attribute defined in ISO 8571-2 and provides a new value for it.

14b.6.2.4 Request operation result

The request operation result parameter is defined in 13.24. This parameter is optional.

14b.6.2.5 Operation result

The operation result parameter is defined in 13.25. This parameter is conditional on the presence of the re-

Table 14h – F-GROUP-CHANGE-ATTRIB parameters

Parameter	F-GROUP-CHANGE-ATTRIB request	F-GROUP-CHANGE-ATTRIB indication	F-GROUP-CHANGE-ATTRIB response	F-GROUP-CHANGE-ATTRIB confirm
Action result			Mandatory	Mandatory
Attributes	Mandatory	Mandatory(=)		
Error action	Mandatory	Mandatory(=)		
Shared ASE information	Optional	Optional(=)	Optional	Optional(=)
Request operation result	Optional	Optional(=)		
Operation result			Conditional	Conditional(=)
Diagnostic			Optional	Optional(=)

quest operation result parameter.

14b.6.2.6 Shared ASE information

The shared ASE information is defined in clause 13.10.

14b.6.2.7 Diagnostic

The diagnostic parameter is described in clause 13.13.