



BSI Standards Publication

Fuel cell technologies

Part 8-201: Energy storage systems using fuel cell modules in reverse mode — Test procedures for the performance of power-to-power systems

National foreword

This British Standard is the UK implementation of EN IEC 62282-8-201:2024. It is identical to IEC 62282-8-201:2024. It supersedes BS EN IEC 62282-8-201:2020, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee GEL/105, Fuel cell technologies.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2024
Published by BSI Standards Limited 2024

ISBN 978 0 539 19632 0

ICS 27.070

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2024.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

English Version

Fuel cell technologies - Part 8-201: Energy storage systems
using fuel cell modules in reverse mode - Test procedures for
the performance of power-to-power systems
(IEC 62282-8-201:2024)

Technologies des piles à combustible - Partie 8-201:
Systèmes de stockage de l'énergie à partir de modules de
piles à combustible réversibles - Procédures d'essai pour la
performance des systèmes de conversion électrochimiques
électriques à électriques
(IEC 62282-8-201:2024)

Brennstoffzellentechnologien - Teil 8-201:
Energiespeichersysteme mit Brennstoffzellenmodulen im
reversiblen Betrieb - Prüfverfahren zum Leistungsverhalten
von Power-to-Power-Systemen
(IEC 62282-8-201:2024)

This European Standard was approved by CENELEC on 2024-08-14. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

European foreword

The text of document 105/1034/FDIS, future edition 2 of IEC 62282-8-201, prepared by IEC/TC 105 "Fuel cell technologies" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 62282-8-201:2024.

The following dates are fixed:

- latest date by which the document has to be implemented at national (dop) 2025-05-14 level by publication of an identical national standard or by endorsement
- latest date by which the national standards conflicting with the (dow) 2027-08-14 document have to be withdrawn

This document supersedes EN IEC 62282-8-201:2020 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

Endorsement notice

The text of the International Standard IEC 62282-8-201:2024 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 60079-0	NOTE	Approved as EN IEC 60079-0
IEC 60079-10-1	NOTE	Approved as EN IEC 60079-10-1
IEC 60079-29-2	NOTE	Approved as EN 60079-29-2
IEC 60364 series	NOTE	Approved as HD 60364 series
IEC 61000-4-7	NOTE	Approved as EN 61000-4-7
IEC 61000-4-13	NOTE	Approved as EN 61000-4-13
IEC 61960-3	NOTE	Approved as EN 61960-3
IEC 61987-1	NOTE	Approved as EN 61987-1
IEC 62282-2-100	NOTE	Approved as EN IEC 62282-2-100
IEC 62282-3-100	NOTE	Approved as EN IEC 62282-3-100
IEC 62282-3-300	NOTE	Approved as EN 62282-3-300
IEC 62933-1:2018	NOTE	Approved as EN IEC 62933-1:2018 (not modified)
IEC 62984-2:2020	NOTE	Approved as EN IEC 62984-2:2020 (not modified)

ISO 4064-1	NOTE	Approved as EN ISO 4064-1
ISO 4064-2	NOTE	Approved as EN ISO 4064-2
ISO 7888	NOTE	Approved as EN 27888
ISO 15839	NOTE	Approved as EN ISO 15839

Annex ZA (normative)

Normative references to international publications with their corresponding European publications

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 Where an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: www.cencenelec.eu.

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 61427-1	-	Secondary cells and batteries for renewable energy storage - General requirements and methods of test - Part 1: Photovoltaic off-grid application	EN 61427-1	-
IEC 61427-2	-	Secondary cells and batteries for renewable energy storage - General requirements and methods of test - Part 2: On-grid applications	EN 61427-2	-
IEC 62282-3-200	-	Fuel cell technologies - Part 3-200: Stationary fuel cell power systems - Performance test methods	EN 62282-3-200	-
IEC 62282-3-201	-	Fuel cell technologies - Part 3-201: Stationary fuel cell power systems - Performance test methods for small fuel cell power systems	EN 62282-3-201	-
IEC 62282-8-101	-	Fuel cell technologies - Part 8-101: Energy storage systems using fuel cell modules in reverse mode - Test procedures for the performance of solid oxide single cells and stacks, including reversible operation	EN IEC 62282-8-101	-
IEC 62282-8-102	-	Fuel cell technologies - Part 8-102: Energy storage systems using fuel cell modules in reverse mode - Test procedures for the performance of single cells and stacks with proton exchange membrane, including reversible operation	EN IEC 62282-8-102	-
IEC 62933-2-1	2017	Electrical energy storage (EES) systems - Part 2-1: Unit parameters and testing methods - General specification	EN IEC 62933-2-1	2018
ISO/IEC Guide 98-3	-	Uncertainty of measurement - Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)	-	-

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
ISO 3746	-	Acoustics - Determination of sound power levels and sound energy levels of noise sources using sound pressure - Survey method using an enveloping measurement surface over a reflecting plane	EN ISO 3746	-
ISO 9614-1	-	Acoustics - Determination of sound power levels of noise sources using sound intensity - Part 1: Measurement at discrete points	EN ISO 9614-1	-
ISO 11204	-	Acoustics - Noise emitted by machinery and equipment - Determination of emission sound pressure levels at a work station and at other specified positions applying accurate environmental corrections	EN ISO 11204	-
ISO 16111	-	Transportable gas storage devices - Hydrogen absorbed in reversible metal hydride	-	-
ISO 19880-1	-	Gaseous hydrogen - Fuelling stations - Part 1: General requirements	-	-
ISO 19881	-	Gaseous hydrogen - Land vehicle fuel containers	-	-
ISO 19882	-	Gaseous hydrogen - Thermally activated pressure relief devices for compressed hydrogen vehicle fuel containers	-	-
ISO 22734	2019	Hydrogen generators using water electrolysis - Industrial, commercial, and residential applications	-	-

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	9
3 Terms, definitions and symbols.....	10
3.1 Terms and definitions.....	10
3.2 Symbols.....	15
4 Measurement instruments and measurement methods.....	15
4.1 General.....	15
4.2 Instrument uncertainty	16
4.3 Measurement plan	16
4.4 Environmental conditions	17
4.5 Maximum permissible variation in test operating conditions	18
5 System parameters.....	18
5.1 General.....	18
5.2 Electric energy storage capacity	19
5.3 Rated electric power input.....	19
5.4 Rated net electric power output.....	19
5.5 Roundtrip electrical efficiency	19
5.6 System response (step response time and ramp rate).....	20
5.6.1 Step response time.....	20
5.6.2 Ramp rate.....	21
5.7 Minimum switchover time	22
5.8 Stand-by state loss rate	22
5.9 Heat input	22
5.10 Hydrogen input and output rate	22
5.11 Recovered heat output.....	22
5.12 Acoustic noise level	22
5.13 Total harmonic distortion.....	23
5.14 Discharge water quality.....	23
6 Test methods and procedures.....	23
6.1 General.....	23
6.2 Electric energy storage capacity test.....	23
6.3 Rated electric power input test.....	24
6.4 Rated net electric power output test.....	25
6.5 Roundtrip electrical efficiency test.....	26
6.5.1 General	26
6.5.2 Test procedure	26
6.5.3 Calculation of the roundtrip electrical efficiency	27
6.6 Other system performance tests	28
6.6.1 System response test, step response time and ramp rate	28
6.6.2 Minimum switchover time test	29
6.6.3 Stand-by state loss rate test	30
6.6.4 Heat input test.....	30
6.6.5 Recovered heat output test.....	31
6.6.6 Hydrogen input and output rate test.....	31

6.6.7	Acoustic noise level test	31
6.6.8	Total harmonic distortion test.....	31
6.6.9	Discharge water quality test.....	31
6.7	Component performance test	32
6.7.1	Electrolyser performance test	32
6.7.2	Hydrogen storage performance test	32
6.7.3	Fuel cell performance test	33
6.7.4	Water management system performance test	33
6.7.5	Battery performance test	34
6.7.6	Oxygen storage performance test	34
7	Test reports	34
7.1	General.....	34
7.2	Report items	34
7.3	Tested system data description.....	35
7.4	Test condition description	35
7.5	Test data description	35
7.6	Uncertainty evaluation	35
	Bibliography.....	36
	Figure 1 – System configuration of electric energy storage system using hydrogen – Type with electrolyser and fuel cell	8
	Figure 2 – System configuration of electric energy storage system using hydrogen – Type with reversible cell	9
	Figure 3 – Typical sequence of phases during the system operation	17
	Figure 4 – Step response time and ramp rate of EES system	21
	Figure 5 – Step response test	29
	Figure 6 – Minimum switchover time test	29
	Table 1 – Symbols	15
	Table 2 – Required steps before executing the measurement	17
	Table 3 – Example of document format of roundtrip electrical efficiency.....	27
	Table 4 – Additional parameters measured on the electrolyser or the reversible cell module in electrolysis mode	32
	Table 5 – Additional parameters measured on the hydrogen storage component	33
	Table 6 – Additional parameters measured on the fuel cell or the reversible cell module in fuel cell mode	33

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FUEL CELL TECHNOLOGIES –

Part 8-201: Energy storage systems using fuel cell modules in reverse mode – Test procedures for the performance of power-to-power systems

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62282-8-201 has been prepared by IEC technical committee 105: Fuel cell technologies. It is an International Standard.

This second edition cancels and replaces the first edition published in 2020. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) consideration of systems connected to hydrogen supply infrastructure (hydrogen grids, vessels, caverns or pipelines);
- b) hydrogen input and output rate is added in the system parameters (5.10);
- c) electric energy storage capacity test is revised (6.2);

- d) roundtrip electrical efficiency test is revised (6.5);
- e) hydrogen input and output rate test is added (6.6.6).

The text of this International Standard is based on the following documents:

Draft	Report on voting
105/1034/FDIS	105/1050/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 62282 series, published under the general title *Fuel cell technologies*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 62282 specifies performance evaluation methods for electric energy storage systems using hydrogen that employ electrochemical reactions both for water and steam electrolysis and electric power generation.

NOTE Heat generation can be a secondary purpose.

This document is intended for power-to-power systems which typically employ a set of electrolyser and fuel cell, or a reversible cell for devices of electric charge and discharge.

A typical target application of the electric energy storage systems using hydrogen is in the class of energy intensive electric energy storage. The systems are recognized as critically useful for the relatively long-term power storage operation, such as efficient storage and supply of the renewable power derived electric energy and grid stabilization.

The IEC 62282-8 series aims to develop performance test methods for power storage and buffering systems based on electrochemical modules (combining electrolysis and fuel cells, in particular reversible cells), taking into consideration both options of re-electrification and substance (and heat) production for sustainable integration of renewable energy sources.

Under the general title Energy storage systems using fuel cell modules in reverse mode, the IEC 62282-8 series consists of the following parts:

- IEC 62282-8-101: Test procedures for the performance of solid oxide single cells and stacks, including reversible operation
- IEC 62282-8-102: Test procedures for the performance of single cells and stacks with proton exchange membrane, including reversible operation
- IEC 62282-8-103¹: Alkaline single cell and stack performance including reversible operation
- IEC 62282-8-201: Test procedures for the performance of power-to-power systems
- IEC 62282-8-202²: Power-to-power systems – Safety
- IEC 62282-8-301: Power to methane energy systems based on solid oxide cells including reversible operation – Performance test methods

As a priority dictated by the emerging needs for industry and opportunities for technological development, IEC 62282-8-101, IEC 62282-8-102 and IEC 62282-8-201 were initiated jointly and firstly. These parts are presented as a package to highlight the need for an integrated approach as regards the system's application (i.e. a solution for energy storage) and its fundamental constituent components (i.e. fuel cells operated in reverse or reversing mode).

¹ Future project.

² Future project.

FUEL CELL TECHNOLOGIES –

Part 8-201: Energy storage systems using fuel cell modules in reverse mode – Test procedures for the performance of power-to-power systems

1 Scope

This part of IEC 62282 defines the evaluation methods of typical performances for electric energy storage systems using hydrogen. It is applicable to the systems that use electrochemical reaction devices for both power charge and discharge. This document applies to systems that are designed and used for service and operation in stationary locations (indoor and outdoor).

The conceptual configurations of the electric energy storage systems using hydrogen are shown in Figure 1 and Figure 2.

Figure 1 shows the system independently equipped with an electrolyser module and a fuel cell module. Figure 2 shows the system equipped with a reversible cell module.

Indispensable components are an electrolyser module and a fuel cell module, or a reversible cell module, an overall management system (which includes a data interface and can include a pressure management), a thermal management system (which can include a thermal storage), a water management system (which can include a water storage) and a purge gas supply (inert gas, practically neither oxidizing nor reducing).

NOTE 1 Indispensable components are indicated by bold lines in Figure 1 and Figure 2.


The system can be equipped with either a hydrogen storage or a connection to an external hydrogen supply infrastructure or a combination of both. There can be a battery and an oxygen storage, as optional components.

The electrolyser module can comprise one or more electrolysers whether or not of the same type. Depending on the operating conditions and considering the operation history, the overall management system can command the concurrent operation of the electrolysers. The fuel cell module can comprise one or more fuel cells whether or not of the same type. Depending on the operating conditions and considering the operation history, the overall management system can command concurrent operation of the fuel cells. The reversible cell module can comprise one or more reversible cells whether or not of the same type. The fuel cell module can comprise one or more fuel cells whether or not of the same type. Depending on the operating conditions and considering the operation history, the overall management system can command concurrent operation of the reversible cells.

The performance measurement is executed in the defined area surrounded by the bold outside solid line (system boundary).

NOTE 2 In the context of this document, the term "reversible" does not refer to the thermodynamic meaning of an ideal process. It is common practice in the fuel cell community to call the operation mode of a cell that alternates between fuel cell mode and electrolysis mode "reversible".

This document is intended to be used for data exchanges in commercial transactions between the system manufacturer and customer. Users of this document can selectively execute test items suitable for their purposes from those specified in this document.

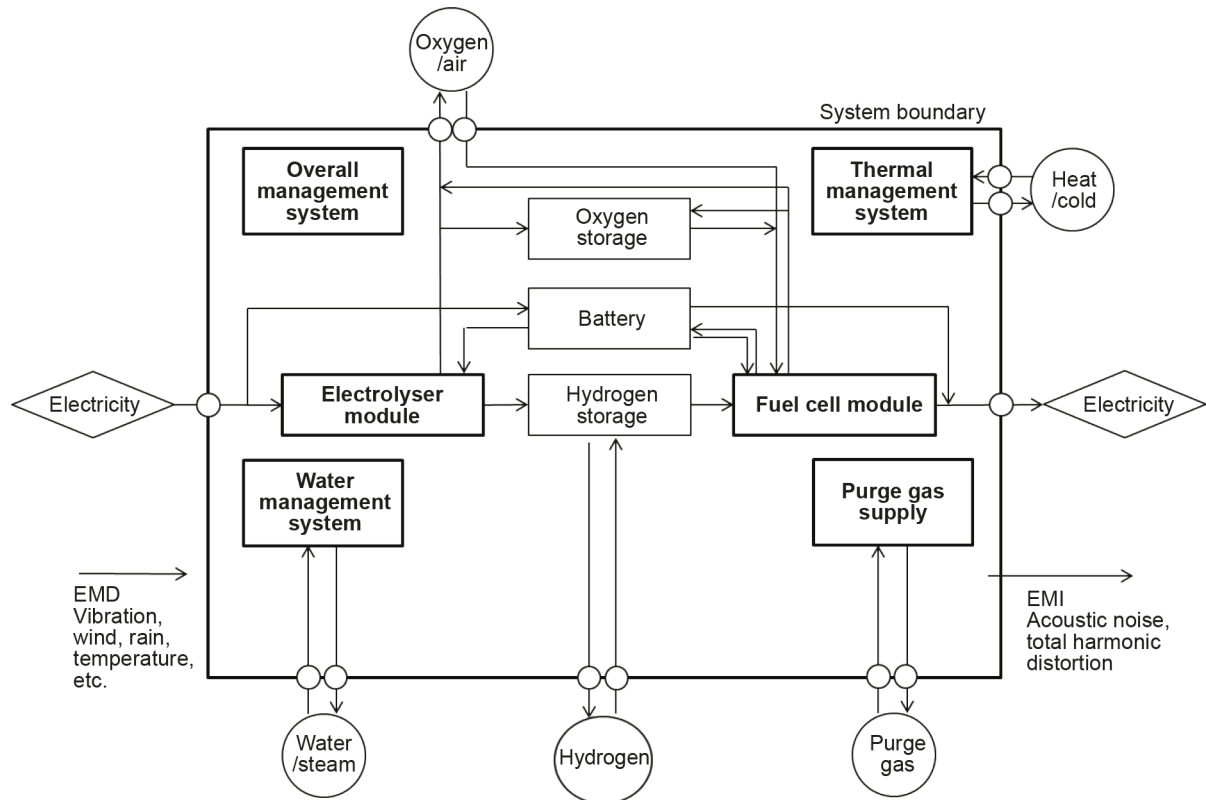

IEC

Key

EMD	electromagnetic disturbance
EMI	electromagnetic interference

NOTE 1 Overall management system, thermal management system, water management system and purge gas supply can have the relation with electrolyser, fuel cell, battery, hydrogen storage and oxygen storage, and also can have the relation with one another.

NOTE 2 Other fluid or energy in- or outputs, depending on the used electrolyser and fuel cell types, can be considered.

NOTE 3 The electricity input and output can be DC or AC or both. Power conditioning sub-systems are usually used.

NOTE 4 There can be more than one electricity point of connection for input or output or both.

Figure 1 – System configuration of electric energy storage system using hydrogen – Type with electrolyser and fuel cell