

Dental rotary instruments — Diamond instruments —

Part 1: Dimensions, requirements, marking and packaging

ICS 11.060.25

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSI
Documents

AVA

Document Sharing Hub

National foreword

This British Standard is the UK implementation of EN ISO 7711-1:1998+A1:2009. It is identical with ISO 7711-1:1997 incorporating amendment 1:2009. It supersedes BS EN ISO 7711-1:1998 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CH/106, Dentistry, to subcommittee CH/106/4, Dental instruments.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Health and Environment Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 November 1998

© BSI 2009

ISBN 978 0 580 59579 0

Amendments/corrigenda issued since publication

Comments	Date	
31 October 2009		Implementation of ISO amendment 1:2009 with CEN endorsement A1:2009: Subclause 7.3 added

English version

Dental rotary instruments — Diamond instruments — Part 1: Dimensions, requirements, marking and packaging

(ISO 7711-1:1997)

Instruments rotatifs dentaires — Instruments
diamantés — Partie 1: Dimensions,
exigences, marquage et emballage
(ISO 7711-1:1997)

Zahnärztliche rotierende Instrumente —
Diamantinstrumente — Teil 1: Maße,
Anforderungen, Kennzeichnung und
Verpackung
(ISO 7711-1:1997)

This European Standard was approved by CEN on 1 May 1998.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Foreword

The text of the International Standard from Technical Committee ISO/TC 106 “*Dentistry*” of the International Organization for Standardization (ISO) has been taken over as an European Standard by Technical Committee CEN/TC 55 “*Dentistry*”, the secretariat of which is held by DIN.

This European Standard replaces EN 27711:1990.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 1999, and conflicting national standards shall be withdrawn at the latest by February 1999.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of the International Standard ISO 7711-1:1997 has been approved by CEN as a European Standard without any modification.

NOTE Normative references to International Standards are listed in Annex ZA (normative).

Foreword to amendment A1

This document (EN ISO 7711-1:1998/A1:2009) has been prepared by Technical Committee ISO/TC 106 “*Dentistry*” in collaboration with Technical Committee CEN/TC 55 *Dentistry* the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by November 2009, and conflicting national standards shall be withdrawn at the latest by November 2009.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of ISO 7711-1:1998/Amd 1:2009 has been approved by CEN as a EN ISO 7711-1:1998/A1:2009 without any modification.

INTERNATIONAL STANDARD

ISO
7711-1

First edition
1997-02-15

Dental rotary instruments — Diamond instruments —

Part 1:

Dimensions, requirements, marking and
packaging

Instruments rotatifs dentaires — Instruments diamantés —

Partie 1: Dimensions, exigences, marquage et emballage



Reference number
ISO 7711-1:1997/15



Document Sharing Hub

Contents

	Page
Foreword	v
Introduction	1
1 Scope	1
2 Normative references	1
3 Symbols	1
4 Requirements	1
5 Testing	41
6 Quality control	47
7 Marking	47
8 Packaging	47
Annex ZA (normative) Normative references to international publications with their relevant European publications	48
Figure 1	3
Figure 2	4
Figure 3	5
Figure 4	6
Figure 5	7
Figure 6	8
Figure 7	8
Figure 8	9
Figure 9	9
Figure 10	10
Figure 11	11
Figure 12	12
Figure 13	13
Figure 14	14
Figure 15	15
Figure 16	15
Figure 17	16
Figure 18	17
Figure 19	18
Figure 20	19
Figure 21	20
Figure 22	21
Figure 23	22
Figure 24	22
Figure 25	23
Figure 26	24
Figure 27	25
Figure 28	25
Figure 29	26
Figure 30	27
Figure 31	28
Figure 32	29
Figure 33	30
Figure 34	30
Figure 35	31
Figure 36	32
Figure 37	32
Figure 38	33

	Page
Figure 39	33
Figure 40	34
Figure 41	34
Figure 42	35
Figure 43	36
Figure 44	37
Figure 45	37
Figure 46	38
Figure 47	39
Figure 48	40
Table 1 — Dimensions	3
Table 2 — Dimensions	4
Table 3 — Dimensions	5
Table 4 — Dimensions	6
Table 5 — Dimensions	7
Table 6 — Dimensions	8
Table 7 — Dimensions	8
Table 8 — Dimensions	9
Table 9 — Dimensions	9
Table 10 — Dimensions	10
Table 11 — Dimensions	11
Table 12 — Dimensions	12
Table 13 — Dimensions	13
Table 14 — Dimensions	14
Table 15 — Dimensions	15
Table 16 — Dimensions	15
Table 17 — Dimensions	16
Table 18 — Dimensions	17
Table 19 — Dimensions	18
Table 20 — Dimensions	19
Table 21 — Dimensions	20
Table 22 — Dimensions	21
Table 23 — Dimensions	22
Table 24 — Dimensions	22
Table 25 — Dimensions	23
Table 26 — Dimensions	24
Table 27 — Dimensions	25
Table 28 — Dimensions	25
Table 29 — Dimensions	26
Table 30 — Dimensions	27
Table 31 — Dimensions	28
Table 32 — Dimensions	29
Table 33 — Dimensions	30
Table 34 — Dimensions	30
Table 35 — Dimensions	31
Table 36 — Dimensions	32
Table 37 — Dimensions	32
Table 38 — Dimensions	33

	Page
Table 39 — Dimensions	33
Table 40 — Dimensions	34
Table 41 — Dimensions	34
Table 42 — Dimensions	35
Table 43 — Dimensions	36
Table 44 — Dimensions	37
Table 45 — Dimensions	37
Table 46 — Dimensions	38
Table 47 — Dimensions	39
Table 48 — Dimensions	40
Table 49 — Run-out	40
Table 50 — Measurement location	41
Table 51 — Round head	42
Table 52 — Inverted, truncated, conical	42
Table 53 — Wheel	43
Table 54 — Cylindrical	43
Table 55 — Truncated conical	44
Table 56 — Hemispherical cylindrical	44
Table 57 — Truncated conical, domed	45
Table 58 — Cylindrical, with ogival end	45
Table 59 — Inverted conical	46
Table 60 — Hemispherical, inverted conical, truncated	46
Table 61 — Inverted conical, with convex end and rounded edge	46

Descriptors: Dentistry, dental equipment, dental rotary-cutting instruments, diamond tools, specifications, shape, dimensions, marking, packaging, quality control.

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 7711-1 was prepared by Technical Committee ISO/TC 106, *Dentistry*, Subcommittee SC 4, *Dental instruments*.

This first edition of ISO 7711-1 cancels and replaces the first edition of ISO 7711:1984, which has been technically revised.

ISO 7711 consists of the following parts, under the general title *Dental rotary instruments — Diamond instruments*:

- *Part 1: Dimensions, requirements, marking and packaging;*
- *Part 2: Discs;*
- *Part 3: Grit sizes, designation and colour code.*

Introduction

This part of ISO 7711 is one of a series of standards relating to dental rotary instruments.

This first edition of ISO 7711-1 contains the updated specifications for diamond instruments given in ISO 7711:1984. It was also aligned in several details with the other International Standards on dental rotary instruments.

The various dimensional and other requirements specified for diamond instruments are those considered important to ensure the interchangeability and safe usage of these instruments in the practice of dentistry. The nominal diameters of the working part listed in Table 1 to Table 48 comply with the diameters specified in ISO 2157. The diameters listed in the first column (preferred diameters) should be used in preference. Attention is drawn to ISO 6360, which specifies a 15-digit number coding system for the identification of dental rotary instruments of all types.

1 Scope

This part of ISO 7711 specifies dimensional and other relevant requirements for, the 14 most commonly used shapes of dental diamond instruments, including a quality control for these instruments.

It is envisaged to update this part of ISO 7711 at each periodical revision to cover at that time the commonly used shapes and other specifications.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 7711. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 7711 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1797-1:1992, *Dental rotary instruments — Shanks — Part 1: Shanks made of metals*.

ISO 2157:1992, *Dental rotary instruments — Nominal diameters and designation code number*.

ISO 3696:1987, *Water for analytical laboratory use — Specification and test methods*.

ISO 6360-1:1985, *Dental rotary instruments — Number coding system — Part 1: General characteristics*.

ISO 6360-2:1986, *Dental rotary instruments — Number coding system — Part 2: Shape and specific characteristics*.

ISO 7711-3:1992, *Dental rotary instruments — Diamond instruments — Part 3: Grit sizes, designation and colour code*.

ISO 8325:1985, *Dental rotary instruments — Test methods*.

3 Symbols

For the purposes of this part of ISO 7711, the following symbols apply:

- d_1 diameter of working part; head diameter
- d_2 neck diameter, measured directly behind the diamond coating
- d_3 diameter of the coated neck, measured at the smallest diameter
- l_1 length of the working part; head length
- l_2 overall length
- α angle of the working part

4 Requirements

4.1 Materials

4.1.1 Shank

The material of the shank shall comply with ISO 1797-1.

4.1.2 Working part

The working part shall be made of diamond grit, bound in either metal, plastics or other suitable material at the discretion of the manufacturer.

Grit sizes shall comply with ISO 7711-3.

4.2 Shapes

The shape of the working part shall be as specified in the appropriate Figure 1 to Figure 48. Variations of shape within the limited dimensions and the descriptions in the subclause titles are permitted.

Testing shall be carried out in accordance with **5.1**.

4.3 Dimensions

4.3.1 Overall length

The overall length of the instrument, l_2 , is the sum of the fitting length of the shank and the length of the working part. In Table 1 to Table 48, “Standard” refers to instruments with standard fitting lengths of shank. For instruments with longer or shorter shank lengths, the overall length, l_2 , will vary accordingly. See ISO 1797-1:1992, Table 1, for fitting lengths of shanks.

4.3.2 Shank

The shank shall be Type 1, 2 or 3 of ISO 1797-1.

4.3.3 Working part

The dimensions of the working part shall be as specified in the appropriate Table 1 to Table 48.

Testing shall be carried out in accordance with **5.1**.

4.3.3.1 Round head (spherical)

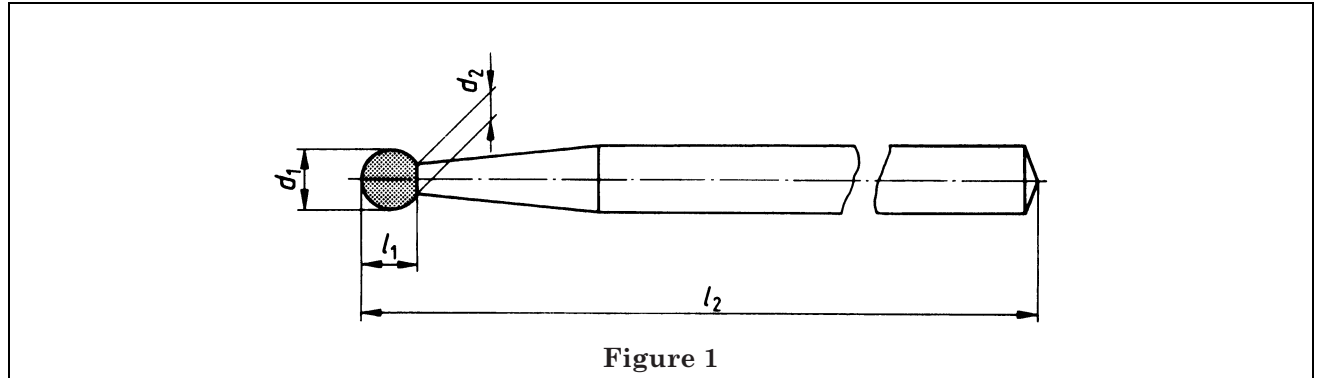


Table 1 — Dimensions (see Figure 1)

Designation of nominal diameter		d_1		d_2	l_1	l_2 $\pm 0,5$			
		nom.	tol.	max.	min.	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
—	007	0,7	$\pm 0,08$	0,50	0,50	22,0	44,5	19,0	16,5
008	—	0,8		0,53	0,55				
009	—	0,9		0,60	0,60				
010	—	1,0		0,70	0,65				
012	—	1,2	$\pm 0,10$	0,73	0,85				
014	—	1,4		0,83	1,05				
016	—	1,6		0,93	1,30				
018	—	1,8		1,03	1,50				
021	—	2,1		1,05	1,80				
023	—	2,3		1,23	2,00				
—	025	2,5		1,25	2,15				
—	027	2,7		1,33	2,35				
—	029	2,9		1,53	2,55				
—	033	3,3		1,63	2,90				
—	035	3,5		1,73	3,10				
—	042	4,2		2,01	3,80				
—	050	5,0		2,35	4,80				

4.3.3.2 Round head (with collar)

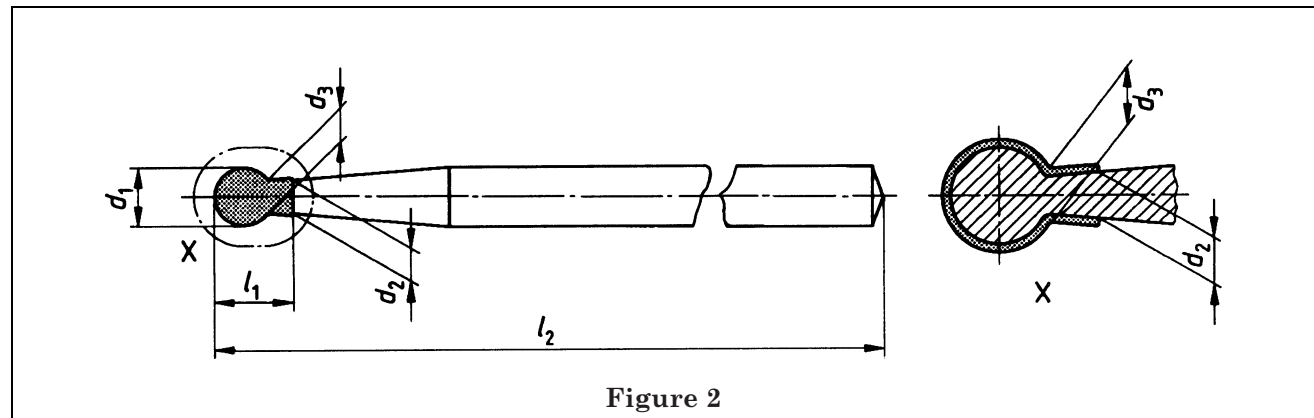


Table 2 — Dimensions (see Figure 2)

Dimensions in millimetres

Designation of nominal diameter		d_1		d_2	d_3 $\pm 0,1$	l_1	l_2 $\pm 0,5$			
Preferred diameters		nom.	tol.	max.		min.	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
009		0,9	$\pm 0,08$	0,75	0,68	2,2	22,0	44,5	19,0	16,5
010	—	1,0		0,96	0,78					
012	—	1,2	$\pm 0,10$	1,00	0,88					
014	—	1,4		1,04	0,98					
016	—	1,6		1,10	1,04					
018	—	1,8		1,18	1,12					
021	—	2,1		1,26	1,20					
023	—	2,3		1,32	1,28	2,5				
—	025	2,5		1,44	1,40					
—	033	3,3			1,60	1,52				

4.3.3.3 Inverted cone head (inverted, truncated conical)

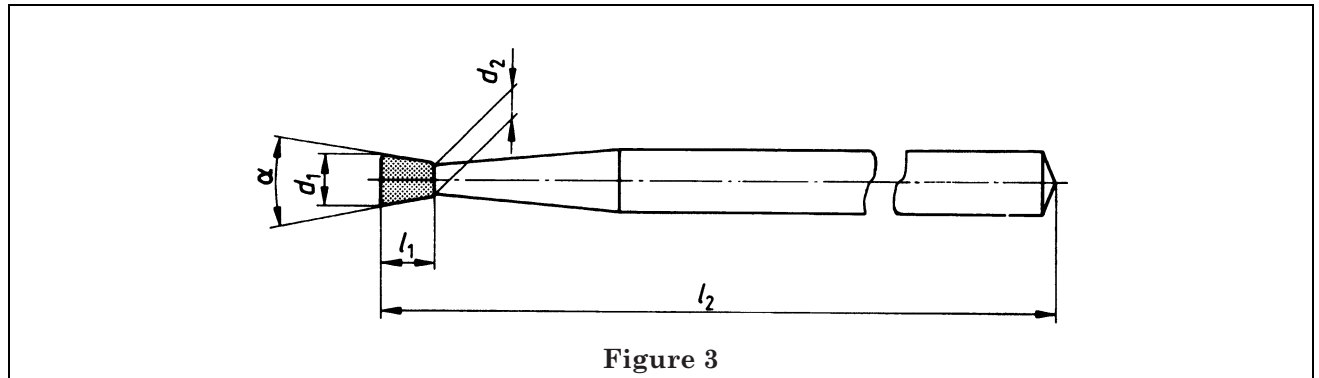


Table 3 — Dimensions (see Figure 3)

Dimensions in millimetres, angles in degrees

Designation of nominal diameter		d_1		d_2	α	l_1	l_2 $\pm 0,5$			
Preferred diameters		nom.	tol.	max.		min.	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
—	007	0,7	$\pm 0,08$	0,50	8° to 14°	0,50	22,0	44,5	19,0	16,5
008	—	0,8		0,50		0,55				
009	—	0,9		0,53		0,60				
010	—	1,0		0,63		0,65				
012	—	1,2	$\pm 0,10$	0,73	10° to 18°	0,85				
014	—	1,4		0,83		1,05				
016	—	1,6		0,89		1,30				
018	—	1,8		1,07		1,50				
021	—	2,1		1,15	10° to 22°	1,80				
023	—	2,3		1,40		2,00				
—	0,25	2,5		1,60		2,15				
—	027	2,7		1,70		2,35				
—	042	4,2		2,00	40° to 60°	2,35				

4.3.3.4 Inverted cone head (with collar)

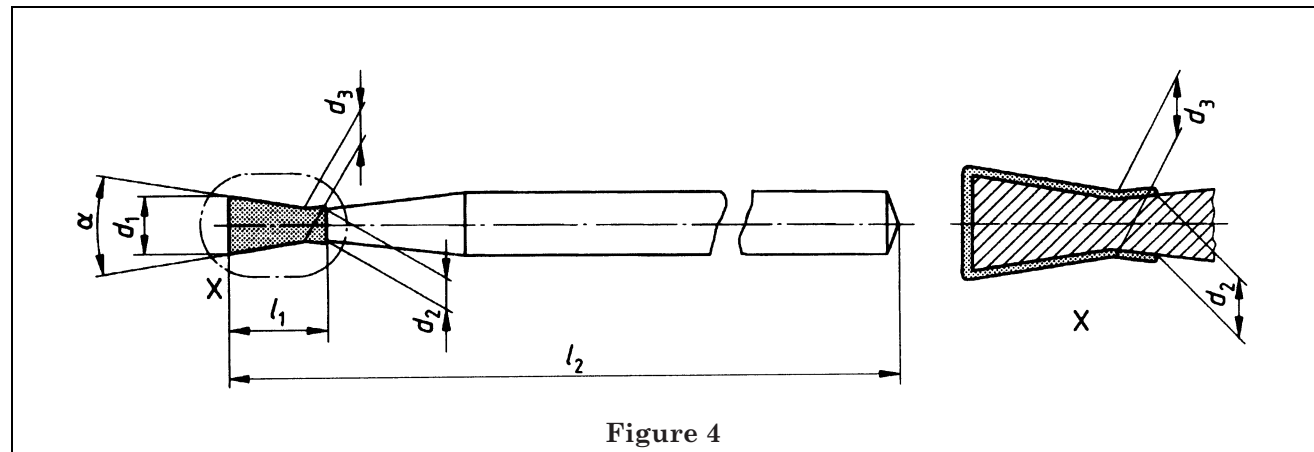


Table 4 — Dimensions (see Figure 4)

Dimensions in millimetres, angles in degrees

Designation of nominal diameter		d_1		d_2	d_3	l_1	α	l_2 ± 0,5			
Preferred diameters		nom.	tol.	max.	± 0,1	min.		Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
—	007	0,7	± 0,08	0,68	0,60	2,0	8° to 14°	22,0	44,5	19,0	16,5
008	—	0,8		0,78	0,68						
009	—	0,9		0,84	0,74						
010	—	1,0		0,96	0,78						
012	—	1,2	± 0,10	1,00	0,88	2,2	10° to 22°				
014	—	1,4		1,04	0,98						
016	—	1,6		1,10	1,04						
018	—	1,8		1,18	1,35						
021	—	2,1		2,5	1,26	1,40					
023	—	2,3			1,32	1,70					
—	025	2,5			1,44	1,90					

4.3.3.5 Wheel

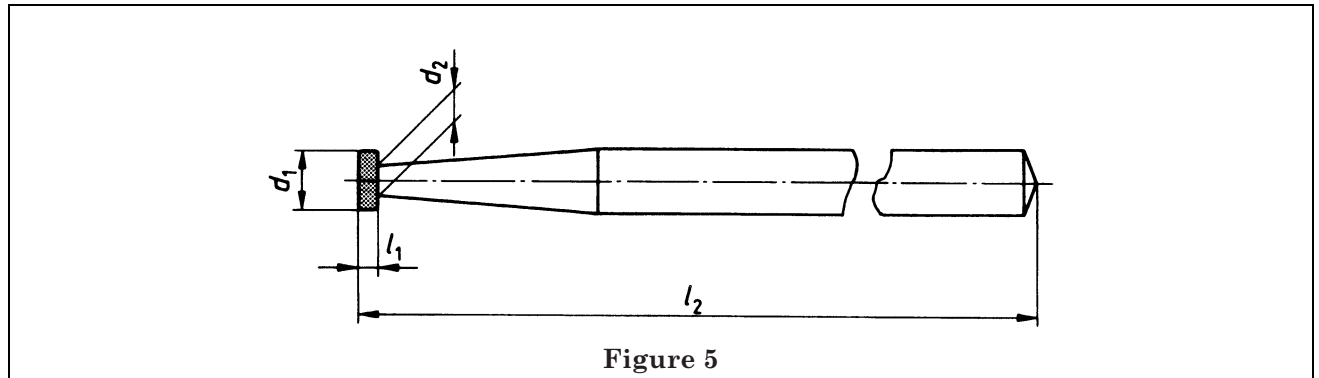


Table 5 — Dimensions (see Figure 5)

Dimensions in millimetres

Designation of nominal diameter		d_1	d_2	l_1	l_2 ± 0,5			
Preferred diameters		± 0,1	max.	min.	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
012	—	1,2	0,73	0,3	22,0	44,5	19,0	16,5
014	—	1,4	0,83					
016	—	1,6	0,93	0,4				
018	—	1,8	1,03					
021	—	2,1	1,05	0,5				
023	—	2,3	1,23	0,6				
—	025	2,5	1,25					
—	027	2,7	1,43					
—	029	2,9	1,45					
—	031	3,1	1,53					
—	033	3,3	1,63					
—	035	3,5	1,67					
—	037	3,7	1,77					
—	040	4,0	1,91					
—	042	4,2	2,01					
—	045	4,5	2,01					
—	047	4,7	2,09					
—	050	5,0	2,17					

4.3.3.6 Wheel with collar

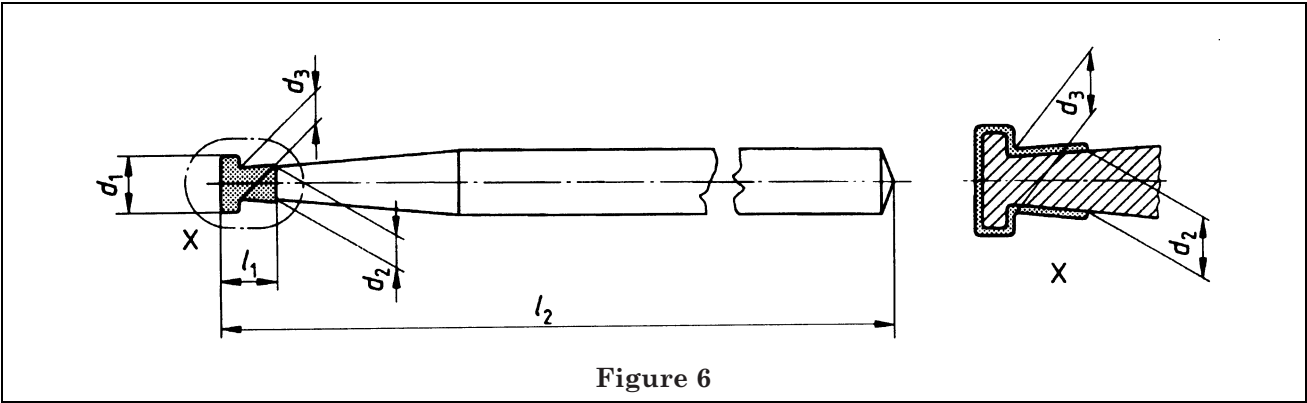


Table 6 — Dimensions (see Figure 6)

Designation of nominal diameter		d ₁	d ₂	d ₃	l ₁	l ₂			
						± 0,5			
Preferred diameters		± 0,1	max.	± 0,1	min.	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
—	012	1,2	1,00	0,88	2,2	22,0	44,5	19,0	16,5
—	016	1,6	1,10	1,04					
—	018	1,8	1,18	1,12					
—	023	2,3	1,32	1,23	2,5				

4.3.3.7 Cylindrical working part

4.3.3.7.1 Head length 3,0 mm

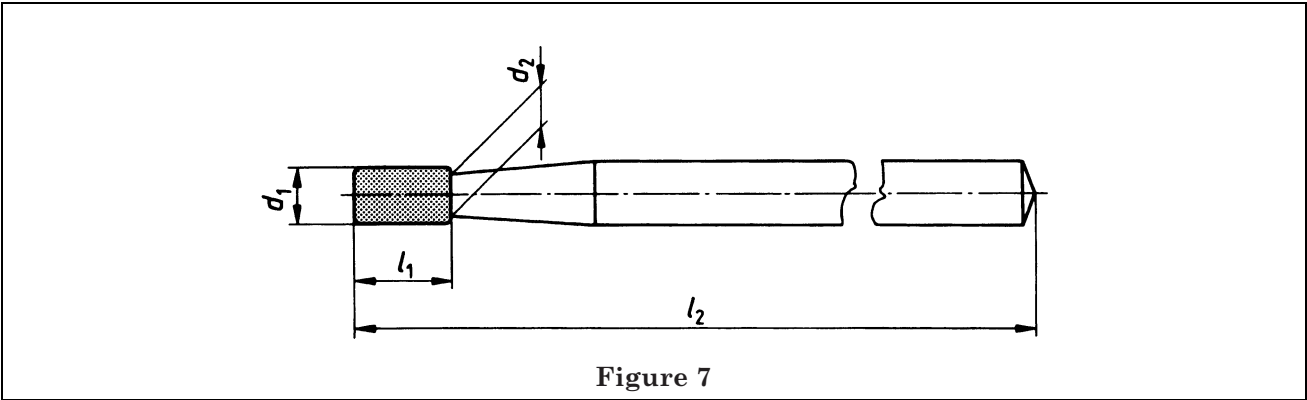


Table 7 — Dimensions (see Figure 7)

Designation of nominal diameter		d ₁		d ₂	l ₁	l ₂			
		nom.	tol.			± 0,5			
Preferred diameters				max.	± 0,3	Shank Type 1 Standard	Shank Type 2 Standard	Shank Type 3 Standard	Shank Type 3 Short
008	—	0,8	± 0,08	0,80	3,0	22,0	44,5	19,0	16,5
009	—	0,9		0,90					
010	—	1,0		1,00					
012	—	1,2	± 0,10	1,20					