

**Implementation of
ISO/IEC 10021-6:1990**

**Information
technology —
Text Communication —
Message-Oriented Text
Interchange Systems
(MOTIS) —**

Part 6: Protocol Specifications

UDC 681.3:621.39

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Information Systems Technology Standards Policy Committee (IST/-) to Technical Committee IST/18, upon which the following bodies were represented:

- British Computer Society
- British Facsimile Industry Consultative Committee
- British Photographic Association
- British Printing Industries Federation
- British Telecommunications plc
- Computing Services Association
- Department of Trade and Industry (Information Technology Division)
- EEA (The Association of Electronics, Telecommunications and Business Equipment Industries)
- HM Treasury (Central Computer and Telecommunications Agency)
- Her Majesty's Stationery Office
- Joint Network Team
- Ministry of Defence
- National Computer Users' Forum
- National Computing Centre Ltd.
- SGML Users' Group
- University of London
- User Standards Forum for Information Technology (Institute of Data Processing Management)

Amendments issued since publication

This British Standard, having been prepared under the direction of the Information Systems Technology Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 29 March 1991

© BSI 05-2000

The following BSI references relate to the work on this standard:
Committee reference IST/18
Draft announced in *BSI News* November 1990

Amd. No.	Date	Comments
6850	September 1991	
7143	July 1992	
7276	August 1992	
7544	December 1992	
7685	March 1993	
8394	January 1995	
8755	July 1995	Indicated by a sideline in the margin

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Foreword	v
Text of ISO/IEC 10021-6	1

National foreword

This British Standard reproduces verbatim ISO/IEC 10021-6:1990, including Technical Corrigendum 1, 2, 3, 4, 5, 6 and 7 and Amendment 1 and implements it as the UK national standard.

This British Standard is published under the direction of the Information Systems Technology Standards Policy Committee whose Technical Committee IST/18 has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international committee any enquiries on interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

NOTE International and European Standards, as well as overseas standards, are available from BSI Sales Department, BSI, Linford Wood, Milton Keynes, MK14 6LE.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO/IEC title page, pages ii to vi, pages 1 to 42 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

INTERNATIONAL STANDARD

ISO/IEC
10021-6

First edition
1990-12-01

AMENDMENT 1
1994-12-01

Information technology — Text Communication — Message-Oriented Text Interchange Systems (MOTIS) —

Part 6: Protocol Specifications

AMENDMENT 1: Message Store Extensions

*Technologies de l'information — Communication de texte — Systèmes d'échange
de texte en mode message (MOTIS) —*

Partie 6: Spécifications du protocole

AMENDEMENT 1: Extensions de dépôt de message



Reference number
ISO/IEC 10021-6:1990/Amd.1:1994(E)

AVA **Documents**
Document Sharing Hub

Contents

	Page
Foreword	v
Introduction	1
Section 1. Introduction	
1 Scope	1
2 Normative references	1
2.1 Open Systems Interconnection	1
2.2 Message Handling Systems	1
2.3 Directory Systems	1
3 Definitions	3
4 Abbreviations	3
5 Conventions	3
5.1 Terms	3
5.2 Abstract Syntax Definitions	3
Section 2. Message Handling System Access Protocol Specifications	
6 Overview of the MHS Access Protocols	4
6.1 MHS Access Protocol Model	4
6.2 Services Provided by the MTS Access Protocol	7
6.3 Services Provided by the MS Access Protocol	7
6.4 Use of Underlying Services	8
6.4.1 Use of ROSE Services	8
6.4.2 Use of RTSE Services	8
6.4.3 Use of ACSE Services	8
6.4.4 Use of the Presentation-service	9
7 MTS Access Protocol Abstract Syntax Definition	9
8 MS Access Protocol Abstract Syntax	14
9 Mapping onto Used Services	18
9.1 Application-contexts omitting RTSE	18
9.1.1 Mapping onto ACSE	18
9.1.1.1 Abstract-bind onto A-ASSOCIATE	19
9.1.1.1.1 Mode	19
9.1.1.1.2 Application Context Name	19
9.1.1.1.3 User Information	19
9.1.1.1.4 Presentation Context Definition List	19
9.1.1.1.5 Quality of Service	19
9.1.1.1.6 Session Requirements	19
9.1.1.2 Abstract-unbind onto A-RELEASE	19
9.1.1.2.1 Result	19
9.1.1.3 Use of A-ABORT and A-P-ABORT Services	19
9.1.2 Mapping onto ROSE	19
9.2 Application-contexts including RTSE	19
9.2.1 Mapping onto RT-OPEN and RT-CLOSE	20
9.2.1.1 Abstract-bind onto RT-OPEN	20
9.2.1.1.1 Mode	20
9.2.1.1.2 Application Context Name	20
9.2.1.1.3 User-data	20
9.2.1.1.4 Presentation Context Definition List	20
9.2.1.2 Abstract-unbind onto RT-CLOSE	20
9.2.2 Mapping onto ROSE	20
9.2.2.1 Managing the Turn	20

		Page
9.3	MS Access Application-context Negotiation	21
9.3.1	Application Context Name	21
9.3.2	User Information	21
9.3.3	Presentation Context Definition List	21
10	Conformance	22
10.1	Statement Requirements	22
10.2	Static Requirements	23
10.3	Dynamic Requirements	23
Section 3. Message Transfer System Transfer Protocol Specification		
11	Overview of the MTS Transfer Protocol	24
11.1	Model	24
11.2	Services Provided by the MTS Transfer Protocol	26
11.3	Use of Underlying Services	26
11.3.1	Use of the RTSE Services	26
11.3.2	Use of the ACSE Services	27
11.3.3	Use of the Presentation-service	27
11.4	Establishing and Releasing Associations	27
12	MTS Transfer Protocol Abstract Syntax Definition	27
13	Mapping on to Used Services	29
13.1	Mapping onto RTSE X.410:1984 mode	29
13.1.1	Mapping onto RT-OPEN and RT-CLOSE	30
13.1.1.1	MTA-bind onto RT-OPEN	30
13.1.1.1.1	Application-protocol	30
13.1.1.1.2	User-data	30
13.1.1.1.3	Mode	30
13.1.1.2	MTA-unbind onto RT-CLOSE	30
13.1.2	Mapping onto RT-TRANSFER	30
13.1.2.1	APDU	30
13.1.3	Managing the Turn	30
13.1.3.1	Use of the RT-TURN-PLEASE Service	31
13.1.3.1.1	Priority	31
13.1.3.2	Use of the RT-TURN-GIVE Service	31
13.1.4	Use of the RT-P-ABORT Service	31
13.1.5	Use of the RT-U-ABORT Service	31
13.2	Mapping onto RTSE normal mode	31
13.2.1	Mapping onto RT-OPEN and RT-CLOSE	32
13.2.1.1	MTA-bind onto RT-OPEN	32
13.2.1.1.1	Mode	32
13.2.1.1.2	Application Context Name	32
13.2.1.1.3	User-data	32
13.2.1.1.4	Presentation Context Definition List	32
13.2.1.2	MTA-unbind onto RT-CLOSE	32
13.2.2	Mapping onto RT-TRANSFER	32
13.2.3	Managing the Turn	32
13.2.4	Use of the RT-P-ABORT Service	32
13.2.5	Use of the RT-U-ABORT Service	32
14	Conformance	33
14.1	Statement Requirements	33

	Page	
14.2	Static Requirements	33
14.3	Dynamic Requirements	33
Annex A	(normative) Reference Definition of MHS Protocol Object Identifiers	34
Annex B	(normative) Interworking with 1984 Systems	35
B.1	Association Establishment	36
B.1.1	Initiator-credentials/Responder-credentials	36
B.1.2	Security-context	36
B.1.3	Bind-error	36
B.2	Rules for Transferring to 1984 systems	36
B.2.1	Extensions	36
B.2.2	Per-domain-bilateral-information	36
B.2.3	Trace-information/Subject-intermediate-trace-information	36
B.2.4	Originator-name/Report-destination-name	36
B.2.5	Per-recipient-fields of Message- or Probe-Transfer	37
B.2.6	Per-recipient-fields of Report-transfer	37
B.2.7	OR-name	37
B.2.8	OR-address	37
B.2.9	Encoded-information-types	37
B.2.10	Content-type and Content	38
B.3	Rules for Receiving from 1984 systems	38
B.3.1	Messages originating from 1984 systems	38
B.3.2	Massages that have previously been downgraded	38
B.4	Service Irregularities	38
Annex C	Summary of Change to previous editions	38
C.1	Differences between 1984 and 1988 MHS Protocols	38
C.2	Changes introduced in the 1994 MHS protocols	38
C.2.1	MTS Access Protocol (P3) differences	39
C.2.1.1	Delivery-control	39
C.2.1.2	Register	39
C.2.1.3	Extensions	39
C.2.2	MS Access Protocol (P7) differences	39
Annex D	(informative) Differences between ISO/IEC 10021-6 and CCITT Recommendation X.419	39
Annex E	(informative) Index	40
Figure 1	— MTS Access Protocol Model	6
Figure 2	— An MS Access Protocol Model	6
Figure 3	— Abstract Syntax Definition of the MTS Access Protocol (P3)	10
Figure 4	— Abstract Syntax Definition of the MS Access Protocol (P7)	15
Figure 5	— MTS Transfer Protocol Model	26
Figure 6	— Abstract-Syntax Definition of the MTS Transfer Protocol (P1)	29
Figure A.1	— Abstract Syntax Definition of MHS Protocol Object Identifiers	34
Table 1	— MHS Access Protocol Application Contexts	5
Table 2	— Remote Operation Priorities	22
Table 3	— MTS Access Protocol Conformance Requirements	23
Table 4	— MS Access Protocol Conformance Requirements	23
Table 5	— MTS Transfer Protocol Application Contexts	24
Table 6	— Interworking between ISO/IEC MOTIS and CCITT X.400	25
Table 7	— MTS Transfer Protocol Conformance Requirements	33

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Amendment 1 to International Standard ISO/IEC 10021-6:1990 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee 18, *Document processing and related communication*.

Descriptors: Data processing, information interchange, network interconnection, open systems interconnection, data transmission, text communication, messages, protocols.

Section 1. Introduction

Introduction

This part of ISO/IEC 10021 is one of a number of parts of ISO/IEC 10021 [the International Standards for Message-Oriented Text Interchange Systems (MOTIS)].

MOTIS provides for the exchange of messages between users on a store-and-forward basis. A message submitted by one user (the *originator*) is transferred through the Message Transfer System (MTS) and delivered to one or more other users (the *recipients*). A user may interact directly with the MTS, or indirectly via a message store (MS).

The MTS comprises a number of message-transfer-agents (MTAs), which transfer messages and deliver them to their intended recipients.

This International Standard was developed jointly by CCITT and ISO/IEC. The equivalent CCITT document is CCITT Recommendation X.419.

1 Scope

This part of ISO 10021 specifies the MTS Access Protocol (P3) used between a remote user-agent and the MTS to provide access to the MTS Abstract Service defined in ISO/IEC 10021-4.

This part of ISO/IEC 10021 also specifies the MS Access Protocol (P7) used between a remote user-agent and a message-store (MS) to provide access to the MS Abstract Service defined in ISO/IEC 10021-5.

This part of ISO/IEC 10021 also specifies the MTS Transfer Protocol (P1) used between MTAs to provide the distributed operation of the MTS as defined in ISO/IEC 10021-4.

ISO/IEC 10021-2 identifies the other International Standards which define other aspects of Message Handling Systems.

Section 2 of this part of ISO/IEC 10021 specifies the MHS Access Protocols (P3 and P7). Clause 6 provides an overview of the MHS Access Protocols. Clause 7 defines the abstract-syntax of the MTS Access Protocol (P3). Clause 8 defines the abstract-syntax of the MS Access Protocol (P7). Clause 9 defines the mapping of the MHS Access Protocols onto used services. Clause 10 specifies conformance requirements for systems implementing the MHS Access Protocols.

Section 3 of this part of ISO/IEC 10021 specifies the MTS Transfer Protocol (P1). Clause 11 provides an overview of the MTS Transfer Protocol (P1). Clause 12 defines the abstract-syntax of the MTS Transfer Protocol (P1). Clause 13 defines the mapping of the MTS Transfer Protocol (P1) onto used services. Clause 14 specifies conformance requirements for systems implementing the MTS Transfer Protocol (P1).

Annex A provides a reference definition of the MHS protocol object identifiers cited in the ASN.1 modules in the body of this part of ISO/IEC 10021.

Annex B describes protocol rules for interworking with implementations of the CCITT Recommendation X.411 (1984) using the MTS Transfer Protocol (P1).

Annex C identifies the differences between the CCITT Recommendation X.411 (1984) and this part of ISO/IEC 10021.

Annex D identifies the technical differences between the ISO/IEC and CCITT versions of CCITT Recommendations X.419 and ISO/IEC 10021-6.

Annex E provides an index to this part of ISO/IEC 10021, categorised into: Abbreviations; Terms; Information Items; ASN.1 modules; ASN.1 macros; ASN.1 types; and ASN.1 values.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 10021. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 10021 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of ISO and IEC maintain registers of currently valid International Standards.

2.1 Open Systems Interconnection

This part of ISO/IEC 10021 cites the following OSI specifications:

ISO/IEC 8649:1988, *Information technology — Open Systems Interconnection — Service Definition for the Association Control Service Element*.

ISO/IEC 8822:1994, *Information technology — Open Systems Interconnection — Basic Presentation Service Definition*.

ISO/IEC 8824-1, *Information technology — Open Systems Interconnection — Abstract Syntax Notation One (ASN.1): Specification of Basic Notation*¹⁾.

ISO/IEC 8824-2, *Information technology — Open Systems Interconnection — Abstract Syntax Notation One (ASN.1): Information Object Specification*¹⁾.

ISO/IEC 8824-3, *Information technology — Open Systems Interconnection — Abstract Syntax Notation One (ASN.1): Constraint Specification*¹⁾.

ISO/IEC 8824-4, *Information technology — Open Systems Interconnection — Abstract Syntax Notation One (ASN.1): Parameterization of ASN.1 Specifications*¹⁾.

ISO/IEC 9066-1:1989, *Information processing systems — Text communication — Reliable Transfer — Part 1: Model and service definition*.

ISO/IEC 9066-2:1989, *Information processing systems — Text communication — Reliable Transfer — Part 2: Protocol Specification*.

ISO/IEC 13712-1, *Information technology — Remote Operations: Concepts, Model and Notation*¹⁾.

ISO/IEC 13712-2, *Information technology — Remote Operations: OSI Realisations: Remote Operations Service Element (ROSE) Service Definition*¹⁾.

ISO/IEC 13712-3, *Information technology — Remote Operations: OSI Realisations: Remote Operations Service Element (ROSE) Protocol Specification*¹⁾.

2.2 Message Handling Systems

This part of ISO/IEC 10021 cites the following Message Handling specifications:

ISO/IEC 10021-1:1990, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 1: System and service overview*.

ISO/IEC 10021-1/Amd.1:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 1: System and service overview — Amendment 1: Message Store Extensions*.

ISO/IEC 10021-2:1990, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 2: Overall Architecture*.

ISO/IEC 10021-2/Amd.1:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 2: Overall Architecture — Amendment 1: Representation of OIR addresses for human exchange*.

ISO/IEC 10021-2/Amd.2:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 2: Overall Architecture — Amendment 2: Minor Enhancements — Multinational organizations and terminal-form addresses*.

ISO/IEC 10021-2/Amd.3, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 2: Overall Architecture — Amendment 3*¹⁾.

ISO/IEC 10021-4:1990, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 4: Message Transfer System: Abstract Service Definition and Procedures*.

ISO/IEC 10021-4/Amd.1:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 4: Message Transfer System: Abstract Service Definition and Procedures — Amendment 1: Minor Enhancements: Notification type and Directory substitution*.

ISO/IEC 10021-4/Amd.2, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 4: Message Transfer System: Abstract Service Definition and Procedures — Amendment 2 ASN.1 and P3 extensions*.

ISO/IEC 10021-5:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 5: Message Store — Abstract service definition*.

ISO/IEC 10021-6:1990, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 6: Protocol Specifications*.

¹⁾ To be published.

ISO/IEC 10021-7:1990, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 7: Interpersonal messaging system*.

ISO/IEC 10021-7/Amd.1:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 7: Interpersonal messaging system — Amendment 1: Minor Enhancements: File transfer body part and auto-submission indication*.

ISO/IEC 10021-7/Amd.2:, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 7: Interpersonal messaging system — Amendment 2: Voice body part and new ASN.1²⁾*.

ISO/IEC 10021-7/Amd.3:1994, *Information technology — Text Communication — Message Oriented Text Interchange Systems (MOTIS) — Part 7: Interpersonal messaging system — Amendment 3: Message Store Extensions*.

2.3 Directory Systems

This part of ISO/IEC 10021 cites the following Directory System specification:

ISO/IEC 9594-2:1990, *Information technology — Open Systems Interconnection — The Directory Part 2: Models*.

3 Definitions

For the purposes of this part of ISO/IEC 10021 the definitions given in ISO/IEC 10021-2 apply.

4 Abbreviations

For the purposes of this part of ISO/IEC 10021 the abbreviations given in ISO/IEC 10021-2 apply.

5 Conventions

This International Standard uses the descriptive conventions described below.

5.1 Terms

Throughout this part of ISO/IEC 10021 the words of defined terms, and the names and values of service parameters and protocol fields, unless they are proper names, begin with a lower-case letter and are linked by a hyphen thus: defined-term. Proper names begin with an upper-case letter and are not linked by a hyphen thus: Proper Name. The names and values of the parameters of the MTS Abstract Service and the MTA Abstract Service (including components of O/R address defined in ISO/IEC 10021-2) are printed in **bold**.

5.2 Abstract Syntax Definitions

This part of ISO/IEC 10021 defines the abstract-syntax of the MHS protocols using the abstract syntax notation (ASN.1) defined in ISO 8824 and the remote operations notation defined in ISO/IEC 9072-1.

²⁾ To be published.

Section 2. Message Handling System Access Protocol Specifications

6 Overview of the MHS Access Protocols

6.1 MHS Access Protocol Model

Clause 6 of ISO/IEC 10021-4 describes an abstract model of the Message Transfer System (MTS), and the MTS Abstract Service which it provides to its MTS-users.

Clause 6 of ISO/IEC 10021-5 describes an abstract model of a Message Store (MS), and the MS Abstract Service which it provides to its MS-user.

This clause describes how the MTS Abstract Service and the MS Abstract Service are supported by instances of OSI communication when an abstract-service user and an abstract-service provider are realised as application-processes located in different open systems.

In the OSI environment, communication between application-processes is represented in terms of communication between a pair of application-entities (AEs) using the presentation-service. The functionality of an application-entity is factored into a set of one or more application-service-elements (ASEs). The interaction between AEs is described in terms of their use of the services provided by the ASEs.

Access to the MTS Abstract Service is realized by the pairing of three ports between the MTS and the MTS-user. Each port is supported by an application-service-element; for some port types more than one version of the application-service-element is defined. The Message Submission Service Element (MSSE) supports the services of the submission-port. The Message Delivery Service Element 1988 (MDSE-88) and Message Delivery Service Element 1994 (MDSE-94) support the services of the delivery-port. The Message Administration Service Element 1988 (MASE-88) and Message Administration Service Element 1994 (MASE-94) support the services of the administration-port.

Similarly, access to the MS Abstract Service is realized by the pairing of three ports between the MS and the MS-user. Each port is supported by an application-service-element; for each port type more than one version of the application-service-element is defined. The Message Submission Service Element (MSSE) and the MS Message Submission Service Element (MS-MSSE) support the services of the MS-submission-port. The Message Retrieval Service Element 1988 (MRSE-88) and the Message Retrieval Service Element 1994 (MRSE-94) support the services of the retrieval-port. The Message Administration Service Element 1988 (MASE-88) and Message Administration Service Element 1994 (MASE-94) support the services of the administration-port. The MS-user ASEs act as the consumer, and the MTS ASEs act as the supplier of the MS Abstract Service.

These application-service-elements are in turn supported by other application-service-elements.

The Remote Operations Service Element (ROSE) supports the request/reply paradigm of the abstract operations that occur at the ports in the abstract model. The MSSE, MS-MSSE, MDSE-88, MDSE-94, MRSE-88, MRSE-94, MASE-88, and MASE-94 provide the mapping function of the abstract-syntax notation of an abstract service onto the services provided by the ROSE.

Optionally, the Reliable Transfer Service Element (RTSE) may be used to reliably transfer the application-protocol-data-units (APDUs) that contain the parameters of the operations between AEs.

The Association Control Service Element (ACSE) supports the establishment and release of an application-association between a pair of AEs. Associations between an MTS-user and the MTS may be established by either the MTS-user or the MTS. Associations between an MS-user and an MS may be established only by the MS-user. Only the initiator of an established association can release it.

The combination of one or more of the MSSE, MS-MSSE, MDSE-88, MDSE-94, MRSE-88, MRSE-94, MASE-88, and MASE-94, together with their supporting ASEs, defines the application-context of an application-association. Note that a single application-association may be used to support one or more port types paired between two objects in the abstract model.

Table 1 identifies the application-contexts defined in this part of ISO/IEC 10021 for the MTS Access Protocol and MS Access Protocol.

Table 1 — MHS Access Protocol Application Contexts

Application Context	Message Handling ASEs								Supporting ASEa		
	MSSE	MS-MSSE	MDSE-88	MDSE-94	MASE-88	MASE-94	MRSE-88	MRSE-94	ROSE	RTSE	ACSE
<u>MTS Access Protocol</u>											
mts-access-88	C	—	C	—	C	—	—	—	x	—	x
mts-forced-access-88	S	—	S	—	S	—	—	—	x	—	x
mts-reliable-access-88	C	—	C	—	C	—	—	—	x	x	x
mts-forced-reliable-access-88	S	—	S	—	S	—	—	—	x	x	x
mts-access-94	C	—	—	C	—	C	—	—	x	—	x
mts-forced-access-94	S	—	—	S	—	S	—	—	x	—	x
mts-reliable-access-94	C	—	—	C	—	C	—	—	x	x	x
mts-forced-reliable-access-94	S	—	—	S	—	S	—	—	x	x	x
<u>MS Access Protocol</u>											
ms-access-88	C	—	—	—	C	—	C	—	x	—	x
ms-reliable-access-88	C	—	—	—	C	—	C	—	x	x	x
ms-access-94	—	C	—	—	—	C	—	C	x	—	x
ms-reliable-access-94	—	C	—	—	—	C	—	C	x	x	x

Legend	
x	present
—	absent
C	present with initiator the consumer
S	present with initiator the supplier

If the 1994 version of the MTS Access Protocol (P3) is supported, then support for the **mts-access-94** and **mts-forced-access-94** application-contexts is mandatory for an MTA. If the 1988 version of the MTS Access Protocol (P3) is supported, then support for the **mts-access-88** and **mts-forced-access-88** application-contexts is mandatory for an MTA. If an MTA supports the **mts-reliable-access-94** application-context, it shall also support the **mts-forced-reliable-access-94** application-context, and vice versa. If an MTA supports the **mts-reliable-access-88** application-context, it shall also support the **mts-forced-reliable-access-88** application-context, and vice versa. Support for each of the MTS Access Protocol (P3) application-contexts is optional for an MTS-user. The 1994 versions of these application-contexts were introduced to provide revised versions of the Delivery-control and Register operations.

If the MS Access Protocol (P7) is supported, then support for the **ms-access-88** application-context is mandatory for an MS, and support for the **ms-reliable-access-88**, **ms-access-94**, and **ms-reliable-access-94** application-contexts is optional. If an MS supports the **ms-reliable-access-94** application-context, it shall also support the **ms-reliable-access-88** and **ms-access-94** application-contexts. Support for each of the MS Access Protocol (P7) application-contexts is optional for an MS-user. The **ms-access-94** and **ms-reliable-access-94** application-contexts were introduced in the 1994 version of this part of ISO/IEC 10021 in order to offer a broader range of Message Store services (see 7.4 of ISO/IEC 10021-1:1994). These 1994 application-contexts may be used to offer both the original (1988) range of services and the enhanced range of services. Nevertheless, these two application-contexts are intended to stay optional in the next version of this part of ISO/IEC 10021.

NOTE An MS which supported one of the 1994 MS Access Protocols may be required to interwork with the MTS using one of the 1988 MTS Access Protocols. If the MS-user invokes Register (a 1994 operation), the MS should attempt to downgrade the Register argument to a Register-88 argument, and invoke the Register-88 operation over its association with the MTS. If this is not possible the MS returns a register-rejected error to the MS-user.

Figure 1 models an application-context between an MTS-user and the MTS. The consumer role of the MTS-user ASEs, and the supplier role of the MTS ASEs, is indicated by a subscript “c”, or “s”, respectively. This illustrates only one of the possible application-contexts supporting the MTS Access Protocol; in the 1988 version of the MTS Access Protocol, the MDSE-88 replaces the MDSE-94, and the MASE-88 replaces the MASE-94.

Similarly, Figure 2 models and application-context between an MS-user and the MS. This illustrates only one of the possible application-context supporting the MS Access Protocol; in 1998 version of the MTS Access Protocol, the MSSE replaces the MS-MSSE, the MRSE-88 replaces the MRSE-94, and the MASE-88 replaces the MASE-94.

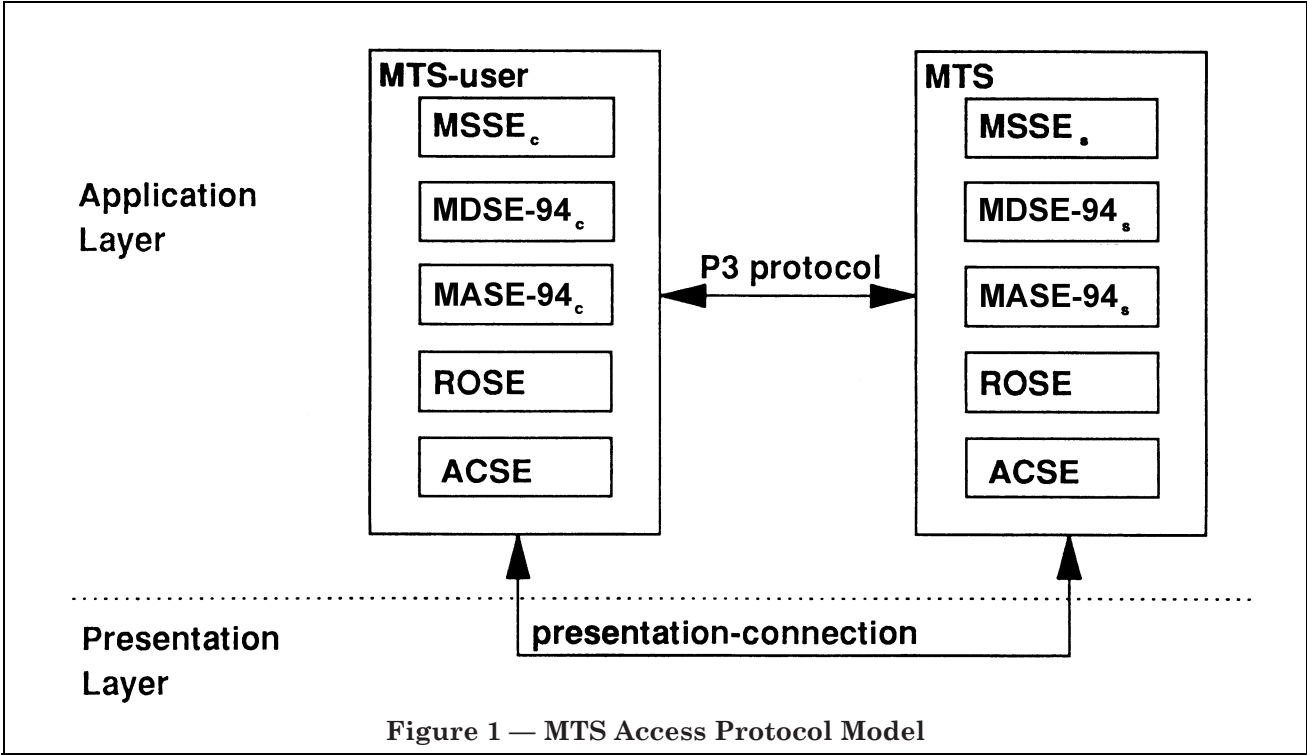


Figure 1 — MTS Access Protocol Model

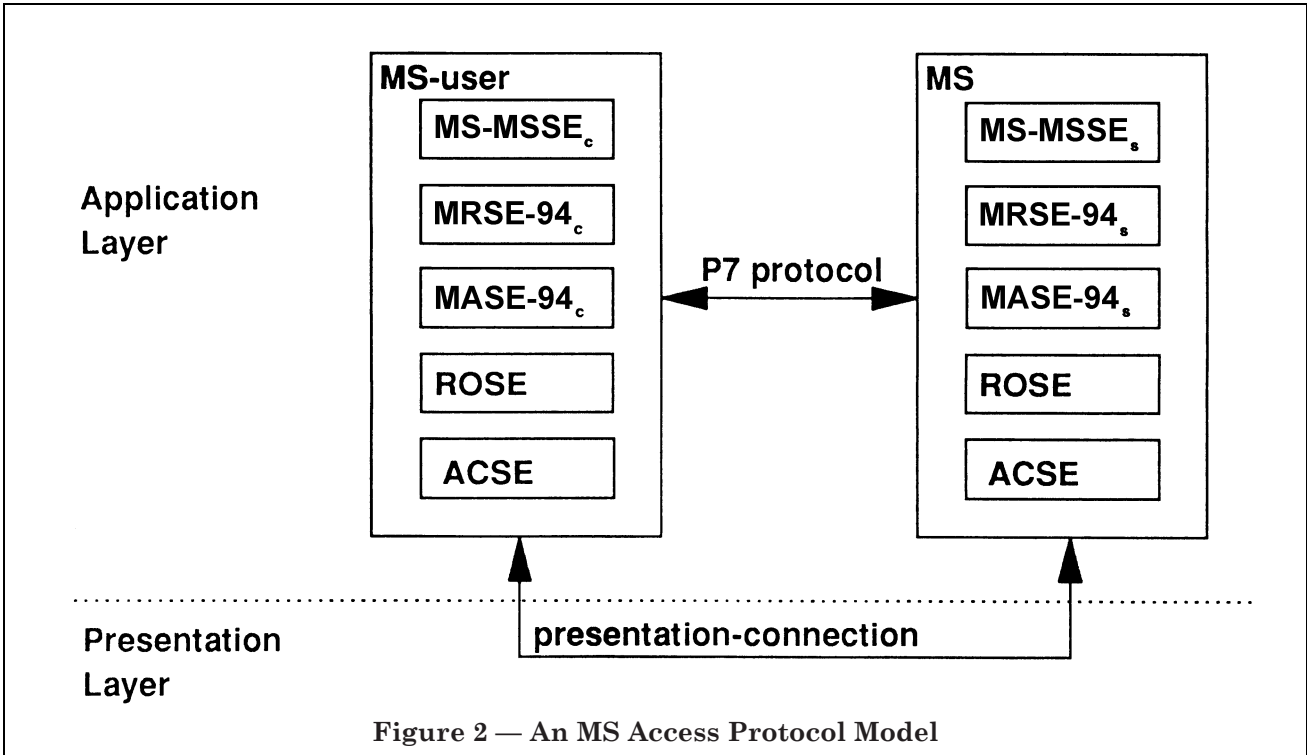


Figure 2 — An MS Access Protocol Model

6.2 Services Provided by the MTS Access Protocol

The MTS Access Protocol (P3) comprises the following operations which provide the services defined in ISO/IEC 10021-4:

MTS-bind and MTS-unbind

- a) MTS-bind
- b) MTS-unbind

Message Submission Service Element (MSSE)

- c) Message-submission
- d) Probe-submission
- e) Cancel-deferred-delivery
- f) Submission-control

Message Delivery Service Element 1988 (MDSE-88)

- g) Message-delivery
- h) Report-delivery
- i) Delivery-control-88

Message Administration Service Element 1988 (MASE-88)

- j) Register-88
- k) Change-credentials

In the 1994 version of the MTS Access Protocol, the Message Delivery Service Element 1988 and Message Administration Service Element 1988 are replaced by the following:

Message Delivery Service Element 1994 (MDSE-94)

- l) Message-delivery
- m) Report-delivery
- n) Delivery-control

Message Administration Service Element 1994 (MASE-94)

- o) Register
- p) Change-credentials

6.3 Services Provided by the MS Access Protocol

The MS Access Protocol (P7) comprises the following operations which provide the services defined in ISO/IEC 10021-5:

MS-bind and MS-unbind

- a) MS-bind
- b) MS-unbind

Message Submission Service Element (MSSE)

- c) Message-submission
- d) Probe-submission
- e) Cancel-deferred-delivery
- f) Submission-control

Message Retrieval Service Element 1988 (MRSE-88)

- g) Summarize
- h) List
- i) Fetch
- j) Delete
- k) Register-MS
- l) Alert