

Identification cards — Integrated circuit(s) cards with contacts —

Part 7: Interindustry commands for Structured Cards Query Language (SCQL)

ICS 35.240.15

National foreword

This British Standard reproduces verbatim ISO/IEC 7816-7:1999 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee IST/17, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO/IEC title page, pages ii to v, a blank page, pages 1 to 36, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the DISC Board, was published under the authority of the Standards Committee and comes into effect on 15 September 1999

© BSI 09-1999

ISBN 0 580 35119 X

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL STANDARD

**ISO/IEC
7816-7**

First edition
1999-03-01

Identification cards — Integrated circuit(s) cards with contacts —

Part 7:

Interindustry commands for Structured Card Query Language (SCQL)

Cartes d'identification — Cartes à circuit(s) intégré(s) à contacts —

*Partie 7: Commandes intersectorielles pour langage d'interrogation de carte
structurée (SCQL)*



Contents

1 Scope 1

2 Normative references 1

3 Terms and definitions 1

4 Symbols (and abbreviated terms) 2

5 SCQL database concept 2

5.1 SCQL database 2

5.2 SCQL tables..... 3

5.3 SCQL views 4

5.4 SCQL system tables and dictionaries 5

5.5 SCQL user profiles 7

6 SCQL related commands 7

6.1 General aspects 7

6.2 Grouping and encoding of commands..... 8

6.3 Notation and special codings..... 9

6.4 Status bytes..... 10

6.5 Coding of identifiers 11

6.6 Security attributes of tables, views and users..... 12

6.7 Linking user ids to INSERT and UPDATE operations 12

7 Database operations..... 12

7.1 CREATE TABLE 12

7.2 CREATE VIEW 13

7.3 CREATE DICTIONARY 15

7.4 DROP TABLE..... 16

7.5 DROP VIEW 17

7.6 GRANT	18
7.7 REVOKE.....	19
7.8 DECLARE CURSOR.....	20
7.9 OPEN.....	22
7.10 NEXT	23
7.11 FETCH.....	23
7.12 FETCH NEXT	24
7.13 INSERT.....	25
7.14 UPDATE	26
7.15 DELETE.....	27
8 Transaction management	28
8.1 General concept.....	28
8.2 Transaction operations	29
9 User management.....	31
9.1 General concept.....	31
9.2 User operations	32
Annex A (informative) Usage of SCQL operations	36

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

International Standard ISO/IEC 7816-7 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 17, *Identification cards and related devices*.

ISO/IEC 7816 consists of the following parts, under the general title *Identification cards — Integrated circuit(s) cards with contacts*:

- *Part 1: Physical characteristics*
- *Part 2: Dimensions and location of the contacts*
- *Part 3: Electronic signals and transmission protocols*
- *Part 4: Interindustry commands for interchange*
- *Part 5: Numbering system and registration procedure for application identifiers*
- *Part 6: Interindustry data elements*
- *Part 7: Interindustry commands for Structured Card Query Language (SCQL)*
- *Part 8: Security related interindustry commands*

Annex A of this part of ISO/IEC 7816 is for information only.

Introduction

This part of ISO/IEC 7816 is one of a series of standards describing the parameters for integrated circuit(s) cards with contacts and the use of such cards for international interchange.

These cards are identification cards intended for information exchange negotiated between the outside and the integrated circuit in the card. As a result of an information exchange, the card delivers information (computation results, stored data), and/or modifies its content (data storage, event memorization).

During the preparation of this part of ISO/IEC 7816, information was gathered concerning relevant patents upon which application of this part of ISO/IEC 7816 might depend. Relevant patents were identified in France, the patent holder is Gemplus. However, ISO cannot give authoritative or comprehensive information about evidence, validity or scope of patents or like rights.

The patent holder has stated that licenses will be granted in appropriate terms to enable application of this part of ISO/IEC 7816, provided that those who seek licenses agree to reciprocate.

Further information is available from

GEMPLUS
B.P. 100
13881 GEMENOS CEDEX
FRANCE

Identification cards — Integrated circuit(s) cards with contacts —

Part 7:

Interindustry commands for Structured Card Query Language (SCQL)

1 Scope

This part of ISO/IEC 7816 specifies

- the concept of a SCQL database (SCQL = Structured Card Query Language based on SQL, see ISO 9075) and
- the related interindustry enhanced commands.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 7816. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO/IEC 7816 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO/IEC 9075:1992, *Information technology — Database languages — SQL2*.

ISO/IEC 7816-4:1995, *Information technology — Identification cards — Integrated circuit(s) cards with contacts — Part 4: Interindustry commands for interchange*.

ISO/IEC 7816-6:1996, *Identification cards — Integrated circuit(s) cards with contacts — Part 6: Interindustry data elements*.

3 Terms and definitions

For the purposes of this part of ISO/IEC 7816, the following definitions apply.

3.1

database basic user

SCQL user with no inherent rights

3.2

database file

structured set of database objects (tables, views, dictionaries) representing the content of a database

3.3

database object owner

SCQL user with the special right to create and drop objects and to manage privileges on these objects

3.4

database owner

initial SCQL user which manages objects and users of the database

3.5

dictionary

view on a system table

3.6

system table

table maintained by the card for managing the database structure and database access

3.7

table

database object with a unique name and structured in columns and rows

3.8

view

logical subset of a table

4 Symbols (and abbreviated terms)

For the purposes of this part of ISO/IEC 7816, the following abbreviations apply:

APDU	Application protocol data unit
API	Application programming interface
DB	Database
DB_O	Database owner
DBBU	Database basic user
DBF	Database file
DBOO	Database object owner
DF	Dedicated file
DO	Data object
ICC	Integrated circuit(s) card
IFD	Interface device
MF	Master file
SCQL	Structured card query language
SQL	Structured query language
TLV	Tag, length, value

5 SCQL database concept

5.1 SCQL database

A database in a card according to this part of ISO/IEC 7816 is called a SCQL database (SCQL = Structured Card Query Language), since the commands for accessing are based on SQL-functionality (see ISO 9075) and coded according to the principles of interindustry commands as defined in ISO/IEC 7816-4. The database itself is a structured set of database objects called a database file DBF. Under a DF there shall be not more than one DBF which is accessible after selection of the respective DF. A database may be also directly attached to the MF.

Fig.1 shows an example for the embedding of a database in the card.

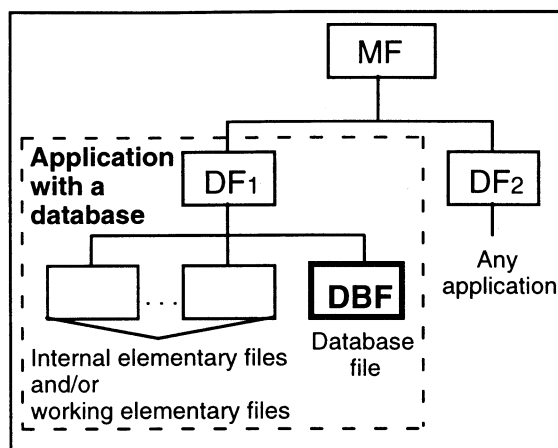


Figure 1 — Application with a database in a multi-application card (example)

An application system may interwork with a SQL database as well as with a SCQL database using the same SQL-API (API = Application Programming Interface). Thus, a card carrying a SCQL database may appear as a part of a distributed SQL database environment. Fig. 2 shows a typical SQL configuration with a card integrated in the system design.

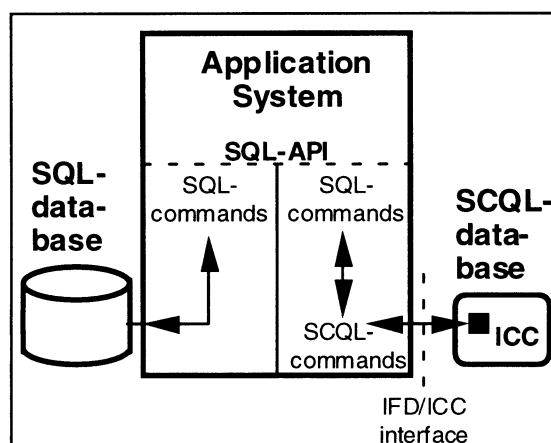


Figure 2 — SCQL database as part of a distributed SQL database environment (example)

5.2 SCQL tables

A SCQL database contains objects called tables, views and dictionaries. Each object can be referenced by a unique identifier.

A table is a structured data object with a unique name within a database. It consists of named columns and a sequence of rows. The number of rows may be conceptually unlimited (i.e., only restricted by the available memory space in the card), or limited. The table and the main characteristics are shown in fig. 3.

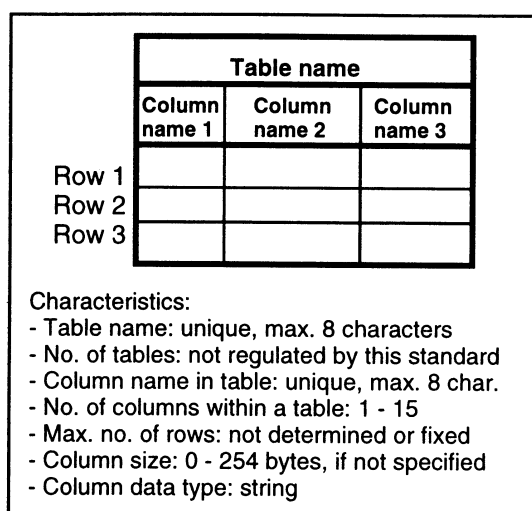


Figure 3 — SCQL table (example) and its main characteristics

After creation the table structure is persistent, i.e. neither an existing column can be withdrawn nor a new column can be inserted. On a table the following actions can be performed:

- read (select)
- insert
- update
- delete.

5.3 SCQL views

A view is a logical subset of a table, which defines the part of the table accessible. Two types of views are to be distinguished:

- a view (see fig. 4), which by definition fixes the accessible columns, is called in this context a static view and
- a view (see fig. 5), which restricts the access to those rows whose contents matches defined conditions (e.g. to rows the value of which is greater '20'), is called in this context a dynamic view.

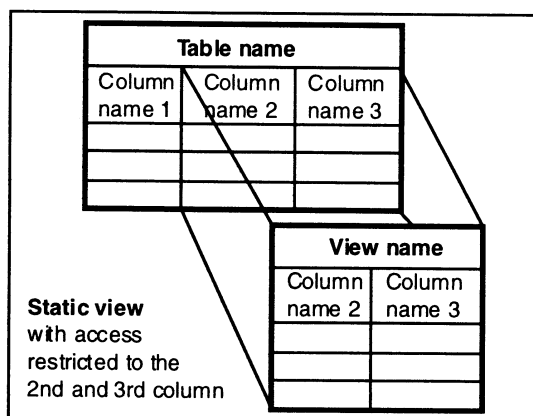


Figure 4 — SCQL static view (example)

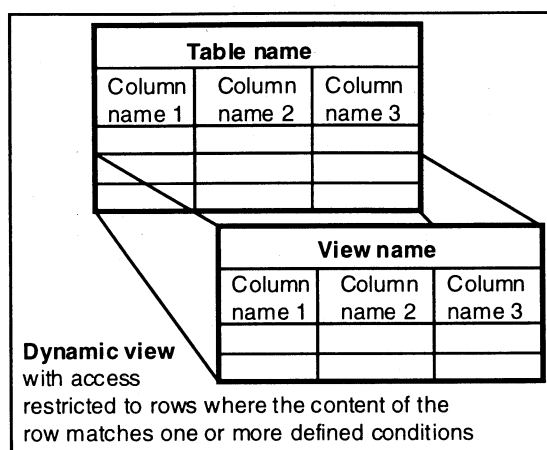


Figure 5 — SCQL dynamic view (example)

A combination of static view and dynamic view in the same view definition is also possible.

A view has like a table a unique name in a SCQL database. Several views may be defined on the same table.

On a view the following actions can be performed:

- read (select)
- update.

5.4 SCQL system tables and dictionaries

A system table is maintained by the card and contains information necessary to manage the database structure and access. There are three system tables:

- the object description table (name *O)
- the user description table (name *U)
- the privilege description table (name *P)

The object description table contains information about the tables and views stored in the database.

The user description table contains information about the users which have access to the database.

The privilege description table contains information about the privileges onto the database tables and views. Privileges describe which tables and views can be accessed by which users, and which actions can be performed by those users on the respective table or view.

The figures 6 - 8 show the system tables with their mandatory columns.

*O (Object description table)				
OBJNAM	OBJOWN	OBJTYP	OBJDES	OBJOPT
Object name (table name or view name, unique)	Object owner (user id)	Object type (T = table, V = view)	Object descriptor (column names in case of table, view definition in case of view)	Object options (security related data objects, e.g. for authentication)
Note: This system table may contain additional implementation specific columns.				

Figure 6 — Object description table

*U (User description table)			
USERID	USRPRO	USROWN	USROPT
User identifier (unique)	User profile: DB_O = DB owner DBOO = DB object owner DBBU = DB basic user	User id of user owner (person who assigns the user id)	User options (security related data objects)
Note: This system table may contain additional implementation specific columns.			

Figure 7 — User description table

*P (Privilege description table)			
OBJNAM	OBJUSR	USRPRI	OBJOWN
Table name, view name or dictionary name	User id of the object user (grantee)	Privileges	User id of the object owner (grantor)
Note: This system table may contain additional implementation specific columns.			

Figure 8 — Privilege description table