



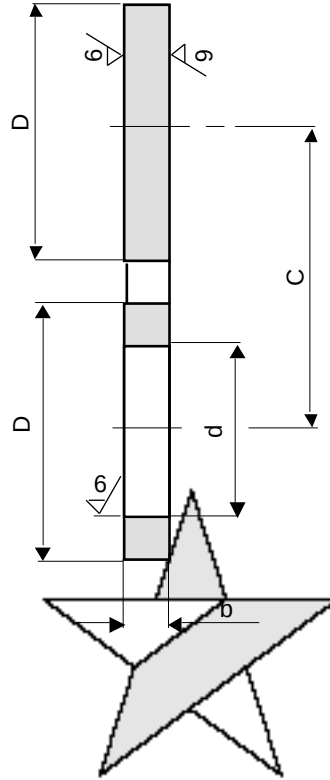

**DISCHI REVERSIBILI PN 16 - SPECTACLE FLANGES PN 16**

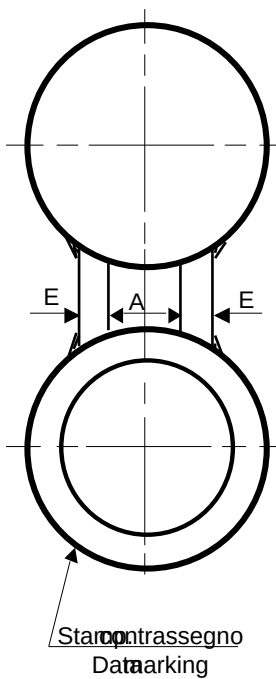

Superfici Forma B DIN 2526

Materiale: RSt 37-2 DIN 17200

: AISI 304 - 1.4301 DIN 17440

: AISI 316 - 1.4401 DIN 17440

Dati stampigliatura:

- Diametro nominale DN;

- Pressione nominale PN;

- Classe tubi di appartenenza.

Surfaces Form B DIN 2526

Material: RSt 37-2 DIN 17200

: AISI 304 - 1.4301 DIN 17440

: AISI 316 - 1.4401 DIN 17440

Data marking:

- Nominal Diameter DN

- Nominal Pressure PN

- Pipe classification.

Es. di design.:

0.089474.G Dischi reversibili PN 16

DN 100 (158x115x8)

B DIN 2526 - RSt 37-2

Ex. of design.:

0.089474.G Spectacle flanges PN16

DN 100 (158x115x8)

B DIN 2526 - RSt 37-2

Sconsigliato  
Not recommended

| DN  | D   | d   | b  | A  | E  | C   | Massa<br>(Kg) | CODICE CODE |            |            |
|-----|-----|-----|----|----|----|-----|---------------|-------------|------------|------------|
|     |     |     |    |    |    |     |               | RSt 37-2    | AISI 304   | AISI 316   |
| 25  | 68  | 35  | 5  | 16 | 15 | 85  | 0,29          | 0.089468.H  | 0.320189.K | 0.089521.X |
| 32  | 78  | 43  | 5  | 16 | 15 | 100 | 0,39          | 0.089469.K  | 0.320190.Q | 0.089522.Z |
| 40  | 88  | 49  | 5  | 16 | 15 | 110 | 0,47          | 0.089470.Q  | 0.320191.D | 0.089523.S |
| 50  | 102 | 61  | 5  | 20 | 15 | 125 | 0,62          | 0.089471.D  | 0.320192.E | 0.089524.T |
| 65  | 122 | 77  | 5  | 20 | 15 | 145 | 0,84          | 0.089472.E  | 0.320193.F | 0.089525.R |
| 80  | 138 | 90  | 6  | 20 | 15 | 160 | 1,61          | 0.089473.F  | 0.320194.G | 0.089526.V |
| 100 | 158 | 115 | 8  | 20 | 15 | 180 | 1,96          | 0.089474.G  | 0.320195.A | 0.089527.W |
| 125 | 188 | 141 | 10 | 25 | 15 | 210 | 3,4           | 0.089475.A  | 0.320196.B | 0.089528.E |
| 150 | 212 | 169 | 10 | 25 | 15 | 240 | 4             | 0.089476.B  | 0.320197.C | 0.089529.F |
| 200 | 268 | 220 | 13 | 25 | 15 | 295 | 9,7           | 0.089477.C  | 0.320198.L | 0.089530.D |
| 250 | 320 | 274 | 16 | 25 | 15 | 355 | 18            | 0.089478.L  | 0.320199.M | 0.089531.S |
| 300 | 378 | 325 | 18 | 25 | 25 | 410 | 22            | 0.089479.M  | 0.320200.A | 0.089532.T |
| 350 | 438 | 368 | 20 | 30 | 25 | 470 | 33,4          | 0.089480.B  | 0.320201.W | 0.089533.R |
| 400 | 490 | 420 | 24 | 30 | 25 | 525 | 48,9          | 0.089481.X  | 0.320202.X | 0.089534.V |
| 450 | 550 | 470 | 26 | 32 | 25 | 585 | 66,2          | 0.161685.G  | 0.320203.Z | 0.161686.A |
| 500 | 610 | 520 | 30 | 32 | 25 | 650 | 93,5          | 0.089482.Z  | 0.320204.S | 0.089535.W |
| 600 | 725 | 620 | 34 | 35 | 25 | 770 | 148           | 0.089483.S  | 0.320205.T | 0.089536.X |