IEC 61757-5-1

Edition 1.0 2021-07

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic sensors – Part 5-1: Tilt measurement – Tilt sensors based on fibre Bragg gratings

Capteurs fibroniques – Partie 5-1: Mesure d'inclinaison – Capteurs d'inclinaison basés sur des réseaux de Bragg à fibres

IEC 61757-5-1:2021-07(en-fr)

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

IEC 61757-5-1

Edition 1.0 2021-07

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic sensors –
Part 5-1: Tilt measurement – Tilt sensors based on fibre Bragg gratings

Capteurs fibroniques –
Partie 5-1: Mesure d'inclinaison – Capteurs d'inclinaison basés sur des réseaux de Bragg à fibres

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.99

ISBN 978-2-8322-9949-4

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 7
2 Normative references 7
3 Terms and definitions 7
4 Symbols 8
5 Structure and characteristics 9
5.1 Fibre Bragg grating (FBG) 9
5.2 FBG tilt sensor configuration 9
5.3 Reference wavelength 11
5.4 Stability behaviour 11
5.4.1 Drift and creep 11
5.4.2 Hysteresis 12
5.5 Test specimen 12
5.6 Indication of the measured values 12
5.7 Zero point related measurement 12
5.8 Non-zero point related measurement 12
5.9 Production set 12
5.10 FBG tilt sensor standard type 13
5.11 FBG tilt sensor series 13
6 Features and characteristics to be measured 13
6.1 Sampling and statistical evaluation 13
6.1.1 Sampling 13
6.1.2 Reporting the measuring result 13
6.1.3 Sample conditioning 14
6.1.4 Ambient test conditions 14
6.1.5 Required type of test for individual characteristics 14
6.2 Bragg wavelength λ_B 14
6.2.1 General 14
6.2.2 Measuring procedure 15
6.2.3 Evaluation 15
6.2.4 Reporting 15
6.3 FBG spectral width 15
6.3.1 Measuring procedure 15
6.3.2 Evaluation 15
6.3.3 Reporting 15
6.4 FBG reflectivity 16
6.4.1 Measuring procedure 16
6.4.2 Evaluation 16
6.4.3 Reporting 16
6.5 Tilt measurement 16
6.5.1 Test set-up 16
6.5.2 Measuring procedure 17
6.5.3 Calibration and evaluation 18
6.6 Gauge factor κ_θ 19
6.7 Temperature and humidity ranges 19

AVA Documents
Document Sharing Hub
Full document details: IEC 61757-5-1-2021

6.7.1 General 19
6.7.2 Measuring procedure 19
6.7.3 Evaluation 20
6.7.4 Reporting 20
7 Features and characteristics to be reported 20
7.1 Construction details 20
7.2 Configuration of the FBG tilt sensor 20
7.3 Temperature and humidity range 20
7.4 Connecting requirement 20
8 Recommendations for use of FBG measuring instruments 20

Figure 1 – Examples for measuring single axis tilt changes 10
Figure 2 – Examples of Bragg wavelength change caused by tilt 10
Figure 3 – Example of tilt sensor using FBG (schematic diagram) 11
Figure 4 – Schematic diagram of tilt measurement system 16
Figure 5 – Example of temperature dependence of the Bragg wavelengths of two FBGs 17
Figure 6 – Example of tilt dependence of the Bragg wavelengths of FBG1 and FBG2 18

Table 1 – Required type of test for individual characteristics 14

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC SENSORS –

Part 5-1: Tilt measurement – Tilt sensors based on fibre Bragg gratings

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61757-5-1 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee TC86: Fibre optics. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
86C/1699/CDV	86C/1718/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 61757 series, published under the general title *Fibre optic sensors*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

INTRODUCTION

The IEC 61757 series is published with the following logic: the sub-parts are numbered as IEC 61757-M-T, where M denotes the measure and T, the technology.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

FIBRE OPTIC SENSORS –

Part 5-1: Tilt measurement – Tilt sensors based on fibre Bragg gratings

1 Scope

This part of IEC 61757 defines the terminology, structure, characteristics and their measurement method including the procedures, for an optical tilt sensor based on fibre Bragg gratings (FBGs) as the sensitive element.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050 (all parts), *International Electrotechnical Vocabulary (IEV)* (available at www.electropedia.org)

IEC 60068-2 (all parts), *Environmental testing – Part 2X: Tests*

IEC 61300-2 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2X: Tests*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 61757, *Fibre optic sensors – Generic specification*

IEC 61757-1-1:2020, *Fibre optic sensors – Part 1-1: Strain measurement – Strain sensors based on fibre Bragg gratings*

IEC 62129-1, *Calibration of wavelength/optical frequency measurement instruments – Part 1: Optical spectrum analyzers*

IEC 62129-2, *Calibration of wavelength/optical frequency measurement instruments – Part 2: Michelson interferometer single wavelength meters*

IEC 62129-3, *Calibration of wavelength/optical frequency measurement instruments – Part 3: Optical frequency meters internally referenced to a frequency comb*

ISO/IEC GUIDE 98-3, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61757, IEC 61757-1-1, IEC 60050 (all parts) and the following apply.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at http://www.electropedia.org/

3.1
tilt
angle of rotation
for a point rotating around a fixed axis, quotient of the length travelled by the point, and the distance from the point to the axis, taken positive or negative, according to whether the rotation is observed to be in the counterclockwise sense or in the clockwise sense, respectively, for an observer looking in the direction opposite to the direction of the axis

Note 1 to entry: Angle of rotation can take any real value, whereas the angle or plane angle defined in geometry (see IEC 60050-102:2007, 102-04-14) is non-negative and restricted to the closed interval [0, π].

Note 2 to entry: The coherent SI unit of angle is radian (symbol rad). Other units accepted for use with the SI are degree (symbol °), minute (symbol ′), and second (symbol ″): 1 ° = (π/180) rad, 1′ = (1/60) °, 1″ = (1/60)′.

[SOURCE: IEC 60050-113:2011, 113-01-43, modified – in the term, "oriented angle" has been replaced with "tilt"]

3.2
FBG tilt sensor
fibre optic sensor that uses one or more fibre Bragg gratings as a sensitive element for tilt measurements in either single axis or multiple axes

3.3
gauge factor
κ_Θ
ratio of the relative change in wavelength $\Delta\lambda/\lambda_0$ to a tilt change $\Delta\theta$ introduced to an FBG tilt sensor and expressed by the gauge factor κ_θ with a unit of 1/rad measured by the manufacturer, and expressed as:

$$\kappa_\theta = \frac{\Delta\lambda}{\lambda_0\,\Delta\theta}$$

Note 1 to entry: The gauge factor κ_θ is used by manufacturers to express the tilt response of their products.

Note 2 to entry: The gauge factor κ_θ for an FBG tilt sensor assumes a linear characteristic. Considering the whole measurement system (sensor, device, cabling), it can be separately defined for the components of the measurement system. It is only valid for defined conditions. In the case of a non-linear characteristic, the gauge factor κ_θ is considered as linear within a defined permissible error.

3.4
temperature compensation constant
constant for correcting the influence of temperature changes when the tilt is obtained from the wavelength changes

Note 1 to entry: The temperature compensation constant should be provided by the manufacturer.

4 Symbols

For the purposes of this document, the following symbols apply:

C temperature compensation constant

D displacement

$\Delta\theta$ tilt change

Documents
Document Sharing Hub

ΔT temperature change

κ_θ gauge factor

L length

Λ FBG period

λ_B Bragg wavelength

λ_0 reference wavelength

5 Structure and characteristics

5.1 Fibre Bragg grating (FBG)

Fibre Bragg gratings are phase diffraction gratings inscribed into optical waveguides. They are frequently produced using ultraviolet (UV) light (e.g. by an excimer laser at 248 nm). The fibre is exposed to an interference pattern of this UV radiation. UV photosensitive processes then produce changes in the refractive index of the fibre core which is susceptible to these. The interference pattern is an image in the fibre core of a periodically changing refractive index. Incident and transported light along the fibre is additively superposed for a certain wavelength at these points (constructive interference); this spectral part of the incident light is reflected. In the transmitted light, this wavelength (denoted Bragg wavelength λ_B) is attenuated according to FBG reflectivity.

The value of the reflected Bragg wavelength λ_B is determined from the Bragg condition:

$$\lambda_B = 2 \cdot n_{eff} \cdot \Lambda \tag{1}$$

According to Formula (1), the Bragg wavelength λ_B of the FBG depends on the effective refractive index of the FBG and the FBG period Λ. The spectral width of the Bragg wavelength peak is essentially determined by the number of grating periods and the magnitude of the refractive index modulation (see IEC 61757-1-1:2020, 5.1).

5.2 FBG tilt sensor configuration

The FBG tilt sensor can be made of various materials and with various forms as a segment of optical fibre with one or more FBG sensors (in the following denoted Bragg grating fibre). The FBG tilt sensor is capable of measuring both absolute and relative tilt, but it is more suitable for tilt monitoring using relative tilt changes. The reference axis for absolute tilt measurements is the vertical axis.

If the sensor is tilted in such a way that the tilt changes the tensile force applied to the FBG sensor, the tilt can be measured by measuring the reflected Bragg wavelength of the FBG (see Figure 1a) and Figure 1b)). In the example of Figure 1a), the tilt change causes a change in torque due to the repositioning of the weight, which in turn causes a change in the tensile force applied to the FBG, resulting in a change in the FBG reflected wavelength (see Figure 2a), Figure 2b) and Figure 2c)). The method used to convert a tilt change into a change of the Bragg wavelength is not part of this document and can be different depending on the manufacturer.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021

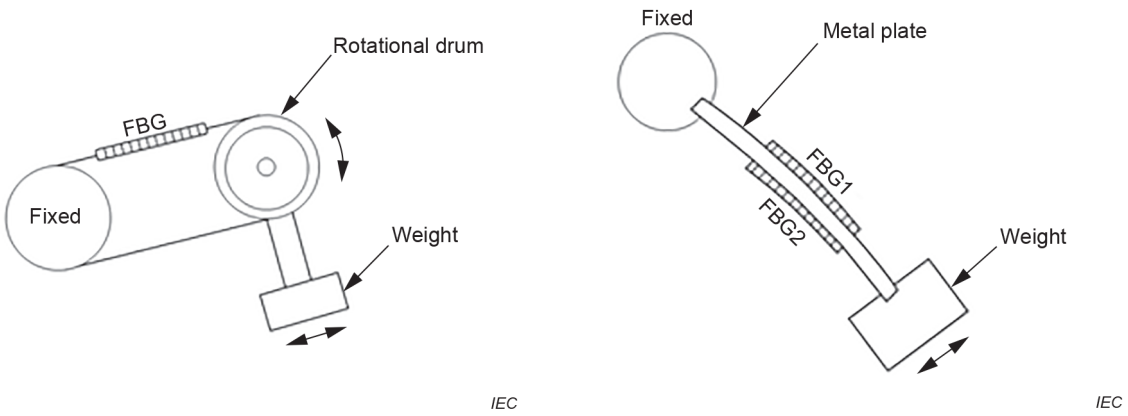

a) rotation type **b) metal plate type**

Figure 1 – Examples for measuring single axis tilt changes

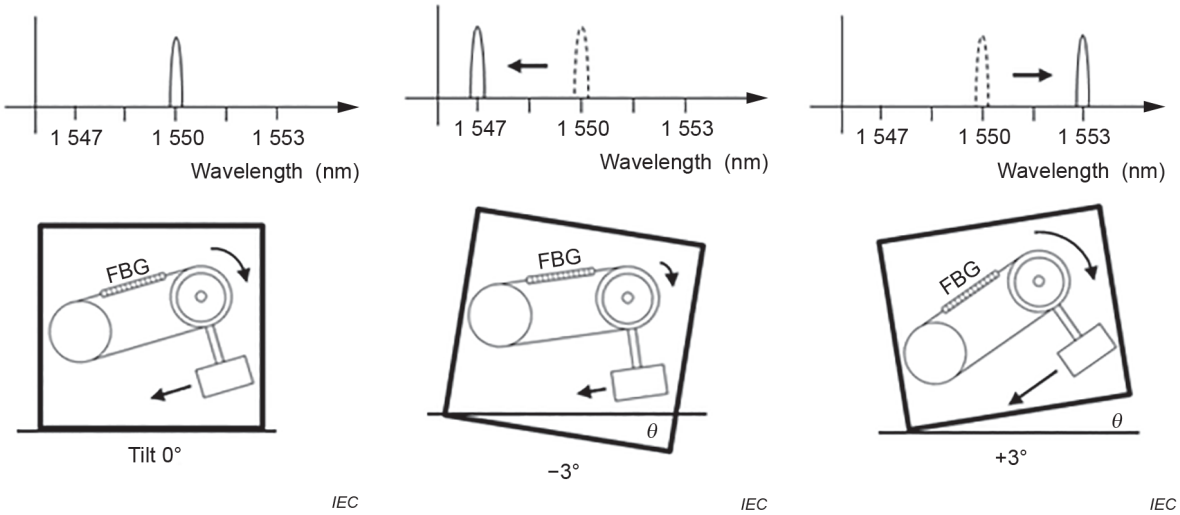

a) no tilt **b) clockwise tilt** **c) counterclockwise tilt**

Figure 2 – Examples of Bragg wavelength change caused by tilt

A broadband source and a spectrometer are connected to the tilt sensing FBG by a circulator as shown in Figure 3. An additional FBG (FBG1), placed in close proximity to the tilt sensing FBG (FBG2), is used for temperature compensation, while FBG2 performs tilt measurements. FBG1 and FBG2 can be connected in parallel or in series, as shown in Figure 3.

Documents
Document Sharing Hub
Full document details: IEC 61757-5-1-2021

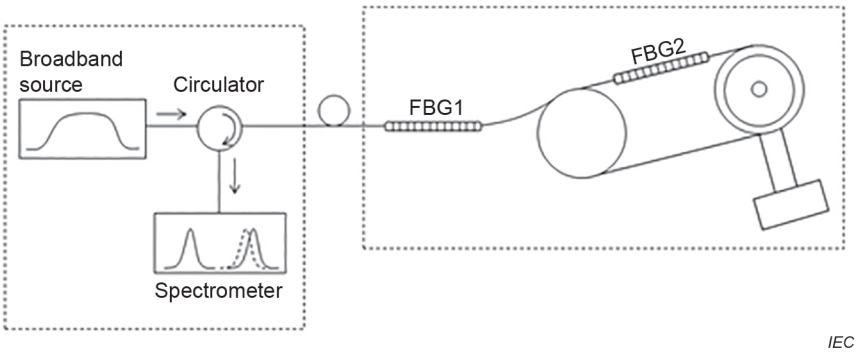

Figure 3 – Example of tilt sensor using FBG (schematic diagram)

5.3 Reference wavelength

Different evaluation methods and different devices result in different Bragg wavelengths being measured for the same filter function of the FBG. In the context of this document, therefore, the result of the wavelength measurement after installation of the FBG tilt sensor with the specified device will be denoted as the reference wavelength λ_0.

The reference wavelength is not necessarily the same as the Bragg wavelength specified by the manufacturer of the FBG. If the FBG is prestrained, for example, there is a difference between the reference wavelength and the Bragg wavelength. If the FBG is not prestrained, the difference between the reference wavelength and the Bragg wavelength is usually very small, so that both wavelength values can be used without significant error.

If the reference wavelength is measured when the measurement cycle is started, this wavelength measurement can be considered as the zero point measurement value.

5.4 Stability behaviour

5.4.1 Drift and creep

Stability, in general, is the ability of a measurement system to maintain its metrological characteristics and meet other specifications over the intended time of operation. Stability, in the context of this document, describes the property of the applied FBG tilt sensor to keep its optical characteristics constant over a period of use determined by the objectives, or to show only a small permissible deviation.

Variations in the measured value might occur:

– when the materials concerned are subject to long-term stress (creep);
– without loading stress (zero point drift).

This can be caused by the slow progress of chemical or physical degradation within the materials used (e.g. ageing), or by a change in the initial physical conditions (e.g. temperature or humidity).

Creep is a quantity that depends on the materials employed, the set-up of the sensor, and the type of operation, and can only be determined experimentally. According to current experience, the error contribution resulting from creep remains irrelevant within the scope of the given uncertainty of measurement for the gauge factor κ_θ, when the bonding material prescribed by the manufacturer is used.

Drift is a slow change of the metrological characteristics of the measurement system. The drift error of an FBG sensor is negligibly small, according to the state of the art; hence for this document, no further specification is required. However, if drifts are generated by a modified production process, for example, or by applying inadequate recoating material, the drift should be stated.

Documents
Document Sharing Hub
Full document details: IEC 61757-5-1-2021

5.4.2 Hysteresis

Hysteresis in material science describes a particular material behaviour whereby the material does not return to its original state, or does so following a time delay, once the input load has been removed. This means that the output value for an elasto-plastic deformation behaviour does not depend only on the input value but also on rate-dependent processes.

When the tilt (or temperature) of a silica-based FBG changes, the Bragg wavelength commonly shifts without showing a hysteresis effect. If hysteresis occurs for repeated or cyclic conditions within the specified operation range of the sensor, the amount of hysteresis should be described.

5.5 Test specimen

Test specimens are plates or other objects upon which the FBG tilt sensors are installed in order to determine and verify their properties. The concept of a "standard test specimen" is used in connection with calibration and testing. For the general description of measuring procedures, the concept "object of measurement" is used.

5.6 Indication of the measured values

The variations in Bragg wavelength induced in the FBG are scanned by a connected measuring device (measured values) and processed for metrological use (result of measurement). Customarily, the measuring device supplies the optical input signal for the sensor and also records the sensor response signal.

5.7 Zero point related measurement

The concepts of "zero point measurement" and “static or quasi-static measurement”, respectively, are used to denote all measurements where the measured value refers to an initial value (the zero point).

The following influencing factors shall also be considered:

– drift in the measuring instrument;

– method of evaluation:

  different evaluation methods (using different measuring devices) can result in different offset quantities with respect to the zero point. In case of replacement of the measuring device, the zero point offset between the old and the new instrument should be determined correspondingly;

– creep of the applied sensor.

The scanning procedure of the FBG tilt sensors shall take place in a route-neutral manner, so that the characteristics of the connecting leads and of the optical connectors or splices do not affect the zero point. Nevertheless, intermittent zero point checking is recommended.

5.8 Non-zero point related measurement

For non-zero point related or periodic dynamic measurements, the measured values are not referred to a fixed initial value. This applies only to the amplitude measurement of a periodic oscillation.

5.9 Production set

An FBG set is a batch of FBG produced in the same manufacturing process.

Documents
Document Sharing Hub

Full document details: IEC 61757-5-1-2021