

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Field device integration (FDI) –
Part 4: FDI Packages**

**Intégration des appareils de terrain (FDI) –
Partie 4: Paquetages FDI**



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Field device integration (FDI) –
Part 4: FDI Packages**

**Intégration des appareils de terrain (FDI) –
Partie 4: Paquetages FDI**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 25.040.40; 35.100.05

ISBN 978-2-8322-9311-9

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	7
INTRODUCTION	9
1 Scope	10
2 Normative references	10
3 Terms, definitions, abbreviated terms and conventions	11
3.1 Terms and definitions	11
3.2 Abbreviated terms	12
3.3 Conventions	12
4 FDI Package Model	12
4.1 Overview	12
4.2 FDI Package Elements	14
4.2.1 Package Catalog	14
4.2.2 Electronic Device Description	14
4.2.3 User Interface Plug-in	14
4.2.4 Attachment	16
4.3 FDI Package Types	16
4.3.1 FDI Device Package	16
4.3.2 FDI Communication Package	17
4.3.3 FDI UIP Package	18
4.3.4 FDI Profile Package	18
5 FDI Package implementation	20
5.1 Packaging technology	20
5.2 Use of Open Packaging Conventions	20
5.2.1 Unknown parts	20
5.2.2 Invalid parts	20
5.2.3 Unknown relationships	20
5.2.4 Interleaving	20
5.2.5 Core properties	20
5.2.6 Thumbnails	20
5.2.7 Digital signatures	20
5.3 FDI Package Parts	21
5.3.1 Package Catalog	21
5.3.2 Electronic Device Description	22
5.3.3 User Interface Plug-in	22
5.3.4 Attachments	25
6 FDI Package Versioning	27
6.1 Version scheme	27
6.2 Versioned elements	28
6.3 Version Hierarchy	28
6.4 UIP Compatibility	30
7 Digital Signatures and Registration Certificates	31
7.1 Signed Elements and Certification documents	31
7.2 Signing mechanism	32
7.3 FDI Package Originator, FDI Registration Authority	33
7.4 FDI Host behavior	33

Annex A (normative) File name conventions	34
A.1 Identification	34
A.2 FDI Package filename convention	34
Annex B (informative) FDI Package Creation	35
B.1 General.....	35
B.2 Tools and Components	35
B.3 Development.....	35
Annex C (informative) FDI Package deployment	38
C.1 General.....	38
C.2 Scenarios	38
Annex D (informative) Example.....	41
D.1 General.....	41
D.2 Open Packaging Conventions	41
D.3 Creation and Handling of FDI Packages.....	44
D.4 FDI Device Package Example	44
Annex E (normative) Schema.....	52
E.1 Target Namespace.....	52
E.2 Catalog	52
E.3 ClassificationIdT	52
E.4 CommunicationProfileT	52
E.5 CommunicationRoleT	52
E.6 CommunicationServerT	53
E.7 DeviceTypeT	53
E.8 FdiRegistrationCert	54
E.9 FdiRegistrationCertT	54
E.10 InterfaceT	55
E.11 ListOfCommunicationProfilesT	56
E.12 ListOfDeviceImagesT	57
E.13 ListOfDeviceTypesT	57
E.14 ListOfDocumentsT	57
E.15 ListOfInterfacesT	58
E.16 ListOfLocalizedStringsT	58
E.17 ListOfProtocolSupportFilesT	58
E.18 ListOfRegDeviceTypesT	59
E.19 ListOfRegistrationsT	59
E.20 ListOfSupportedDeviceRevisionsT	60
E.21 ListOfSupportedUipsT	60
E.22 ListOfUipVariantsT	60
E.23 LocalizedStringT	61
E.24 PackageT	61
E.25 PackageTypeT	62
E.26 PlatformT	63
E.27 RegDeviceTypeT	63
E.28 RegistrationT	64
E.29 RelationshipIdT	64
E.30 String256T	65
E.31 SupportedUipT	65
E.32 UipCatalog	65

E.33	UipStyleT	66
E.34	UipT	66
E.35	UipVariantT	67
E.36	UuidT	67
E.37	VersionSupportedT	68
E.38	VersionT	68
Annex F (normative) Communication protocol specific profiles		69
Annex G (informative) FDI Package life cycle use cases		70
G.1	New Device Type	70
G.2	Replacement of Device	70
G.3	Firmware enhancements	70
G.4	FDI Package life cycle polices	71
G.5	FDI Package update	71
G.6	FDI Package upgrade	71
G.7	FDI Package replacement/exchange	71
G.8	FDI Package uninstallation	71
Annex H (normative) Health Status Method		73
H.1	Background	73
H.2	Device Health Status model	73
H.3	Standard EDD Method signature	73
H.4	Performance considerations	74
Annex I (normative) Modular devices		75
I.1	Concept	75
I.2	EDDL usage profile	75
I.3	Processing recommendations	76
Annex J (normative) FDI Communication Packages for FDI Communication Server		78
J.1	General	78
J.2	Protocol Support File	78
J.3	CommunicationProfile definition	78
J.4	Profile Device	78
J.5	Protocol version information	78
J.6	Associating a Package with an FDI Communication Server	78
J.7	Handling of Catalog elements	78
J.8	Example	79
Annex K (normative) FDI Profile for EDDs		80
K.1	Overview	80
K.2	Entry Point to Online handling	80
K.3	Entry Point to Offline handling	80
K.4	Upload and Download	80
K.5	Initial Data Set	80
K.6	Method GetHealthStatus	80
K.7	Actions	80
K.8	Shared files	81
Bibliography		82
Figure 1 – FDI architecture diagram		10
Figure 2 – FDI Package Model		13
Figure 3 – Architectural mapping		13

Figure 4 – User Interface Plug-in Reference Model	15
Figure 5 – Multiple FDI Packages referencing a common UIP	16
Figure 6 – FDI Device Package.....	17
Figure 7 – FDI Communication Package	18
Figure 8 – FDI UIP Package	18
Figure 9 – FDI Profile Package	19
Figure 10 – Device Function and Parameter sets (type- and profile-specific)	19
Figure 11 – Catalog Element.....	21
Figure 12 – User Interface Plug-in	23
Figure 13 – UIP Catalog	24
Figure 14 – FDI Registration Certificate	27
Figure 15 – Version Hierarchy.....	29
Figure 16 – UIP Version Support concept	31
Figure 17 – FDI Package signing	32
Figure B.1 – Tools used for FDI Package development	36
Figure D.1 – Parts and relationships in a package	41
Figure D.2 – Creating an FDI Package with the content files	44
Figure D.3 – FDI Device Package Example.....	45
Figure D.4 – User Interface Plug-in Example (fancytrend.uip)	48
Figure I.1 – Modular device's package	75
Table 1 – UIP Platform.....	15
Table 2 – Package Catalog Part.....	21
Table 3 – EDD part	22
Table 4 – User Interface Plug-in part	23
Table 5 – UIP Catalog Part	24
Table 6 – UIP Variant Part	25
Table 7 – Image Part	25
Table 8 – Documentation Part.....	26
Table 9 – Protocol Support File Part	26
Table 10 – FDI Registration Certificate Part.....	26
Table 11 – Versioned Elements	28
Table 12 – Influence on FDI Package Version.....	29
Table A.1 – FDI Package Naming Convention.....	34
Table D.1 – Examples of standard MIME media types that can be used in FDI packages	43
Table D.2 – Examples of FDI custom MIME media types that can be used in FDI Packages.....	43
Table E.1 – Enumerations of CommunicationRoleT	53
Table E.2 – Elements of CommunicationServerT	53
Table E.3 – Elements of DeviceTypeT	54
Table E.4 – Elements of FdiRegistrationCertT.....	55
Table E.5 – Elements of InterfaceT	56
Table E.6 – Elements of ListOfCommunicationProfilesT	56

Table E.7 – Elements of ListOfDeviceImagesT	57
Table E.8 – Elements of ListOfDeviceTypesT	57
Table E.9 – Elements of ListOfDocumentsT	58
Table E.10 – Elements of ListOfInterfacesT	58
Table E.11 – Elements of ListOfLocalizedStringsT	58
Table E.12 – Elements of ListOfProtocolSupportFilesT	59
Table E.13 – Elements of ListOfRegDeviceTypesT	59
Table E.14 – Elements of ListOfRegistrationsT	60
Table E.15 – Elements of ListOfSupportedDeviceRevisionsT	60
Table E.16 – Elements of ListOfSupportedUipsT	60
Table E.17 – Elements of ListOfUipVariantsT	61
Table E.18 – Attributes of LocalizedStringT	61
Table E.19 – Elements of PackageT	62
Table E.20 – Enumerations of PackageTypeT	63
Table E.21 – Enumerations of PlatformT	63
Table E.22 – Elements of RegDeviceTypeT	64
Table E.23 – Elements of RegistrationT	64
Table E.24 – Elements of SupportedUipT	65
Table E.25 – Enumerations of UipStyleT	66
Table E.26 – Elements of UipT	67
Table E.27 – Elements of UipVariantT	67
Table F.1 – Communication protocol interest groups (alphabetical order)	69
Table G.1– Device Replacement Guidelines	70
Table G.2 – Firmware enhancement guidelines	71
Table H.1 – Health Status State	73
Table J.1 – Catalog Mapping	78
Table J.2 – Handling of Catalog elements	78

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE INTEGRATION (FDI) –

Part 4: FDI Packages

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62769-4 has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process measurement, control and automation.

This second edition cancels and replaces the first edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) support for Package Developers to build EDDs targeted for today's EDD bases system under a single development tool;
- b) digital signature now includes trusted timestamping for long-term validation of FDI Package;
- c) time stamp for device package signature.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
65E/761/FDIS	65E/771/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62769 series, published under the general title *Field Device Integration (FDI)*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The IEC 62769 series has the general title *Field Device Integration (FDI)* and the following parts:


- Part 1: Overview
- Part 2: FDI Client
- Part 3: FDI Server
- Part 4: FDI Packages
- Part 5: FDI Information Model
- Part 6: FDI Technology Mapping
- Part 7: FDI Communication Devices
- Part 100: Profiles – Generic Protocol Extensions
- Part 101-1: Profiles – Foundation Fieldbus H1
- Part 101-2: Profiles – Foundation Fieldbus HSE
- Part 103-1: Profiles – PROFIBUS
- Part 103-4: Profiles – PROFINET
- Part 109-1: Profiles – HART and WirelessHART
- Part 115-2: Profiles – Protocol-specific Definitions for Modbus RTU
- Part 150-1: Profiles – ISA 100.11a

FIELD DEVICE INTEGRATION (FDI) –

Part 4: FDI Packages

1 Scope

This part of IEC 62769 specifies the FDI Packages. The overall FDI architecture is illustrated in Figure 1. The architectural components that are within the scope of this document have been highlighted in Figure 1.

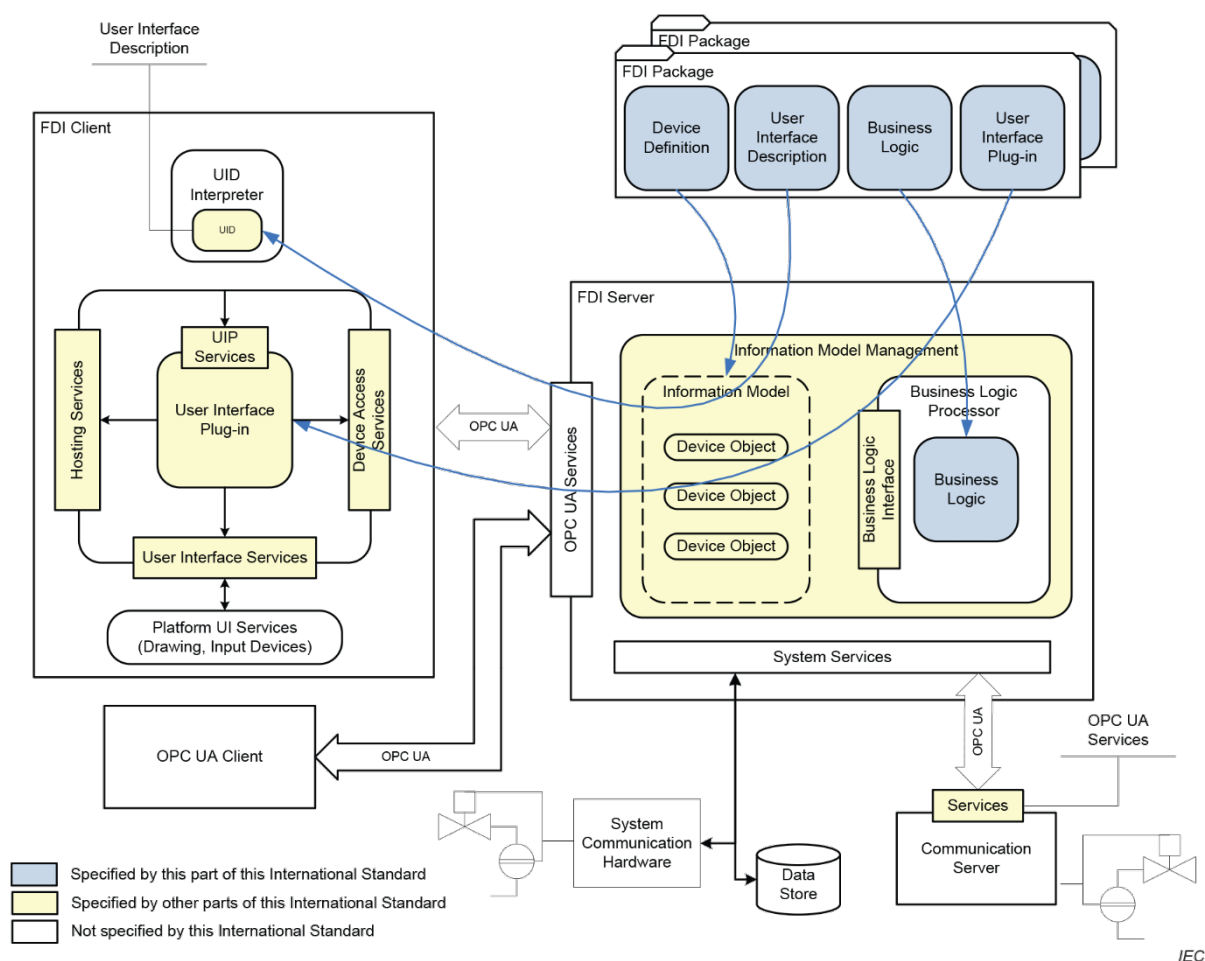

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61804 (all parts), *Function blocks (FB) for process control and electronic device description language (EDDL)*

IEC 61804-5:2015, *Function blocks (FB) for process control and electronic device description language (EDDL) – Part 5: EDDL Builtin library*

IEC 62769-1, *Field Device Integration (FDI) – Part 1: Overview*

IEC 62769-6, *Field Device Integration (FDI) – Part 6: FDI Technology Mapping*

ISO/IEC 29500-2:2016, *Information technology – Document description and processing languages – Office Open XML File Formats – Part 2: Open Packaging Conventions*

ISO 639-1, *Codes for the representation of names of languages – Part 1: Alpha-2 code*

ISO 32000-1, *Document management – Portable document format – Part 1: PDF 1.7*

Extensible Markup Language (XML) 1.0, W3C Recommendation, available at <<http://www.w3.org/TR/REC-xml/>>

XML Schema Definition Language (XSD) 1.1, W3C Recommendation, available at <<http://www.w3.org/TR/xmlschema11-1/>>

ETSI EN 319 132-1, *Electronic Signatures and Infrastructures (ESI); XAdES digital signatures; Part 1: Building blocks and XAdES baseline signatures*

ETSI TS 101 733, *Electronic Signatures and Infrastructures (ESI); CMS Advanced Electronic Signatures (CAAdES)*

FIPS 140-2, *Security Requirements for Cryptographic Modules*

3 Terms, definitions, abbreviated terms and conventions

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62769-1, ISO/IEC 29500-2, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

Attachment

device and protocol-specific support files that are not directly used to integrate the Device into the system

3.1.2

FDI Communication Package

FDI Package that provides information to integrate an FDI Communication Server to an FDI Server

3.1.3

FDI Device Package

FDI Package that provides one or more device types to an FDI Server

3.1.4

FDI Package Model

description of the structure and elements of an FDI Package

3.1.5

FDI Profile Package

FDI Package that provides information for creating a device type node that can be associated with a class of devices

3.1.6

FDI Registration Authority

entity that has the right and the ability to perform FDI conformance tests on FDI Packages and to issue registration certificate documents

3.1.7

FDI UIP Package

FDI Package that provides one or more UIPs to an FDI Server

3.1.8

Package Catalog

file that describes the contents of an FDI Package

3.1.9

UIP Catalog

file that describes the properties of a UIP

3.1.10

UIP Variant

platform-specific element of a User Interface Plug-in

Note 1 to entry: A UIP is composed of one or more variants. For example, one variant may be optimized for portable devices while another variant is optimized for large-screen devices.

3.2 Abbreviated terms

For the purposes of this document, the abbreviated terms given in IEC 62769-1 as well as the following apply.

CFF	Capabilities File for FOUNDATION Fieldbus
ID	Identifier
IDE	Integrated Development Environment
IM	Information Model
PNG	Portable network graphics
ZIP	Zipper (archive file format)

3.3 Conventions

For the purposes of this document, the conventions given in IEC 62769-1 apply.

4 FDI Package Model

4.1 Overview

The FDI Package Model (see Figure 2) provides all the elements necessary to integrate devices, network components and FDI Communication Servers into a system.

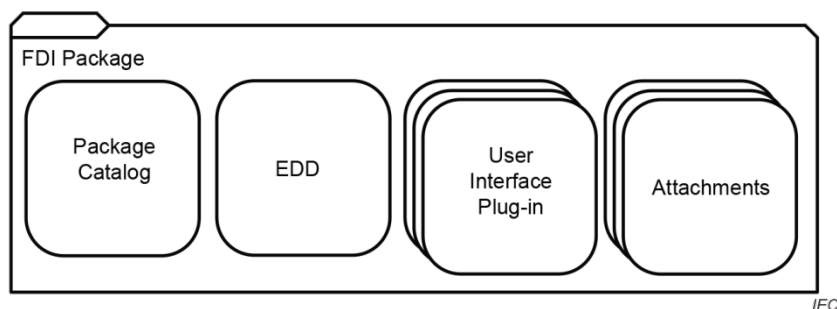


Figure 2 – FDI Package Model

Figure 3 shows the mapping of the FDI Package functional elements, as specified in IEC 62769-1, to the physical elements in an actual FDI Package, as specified in this document.

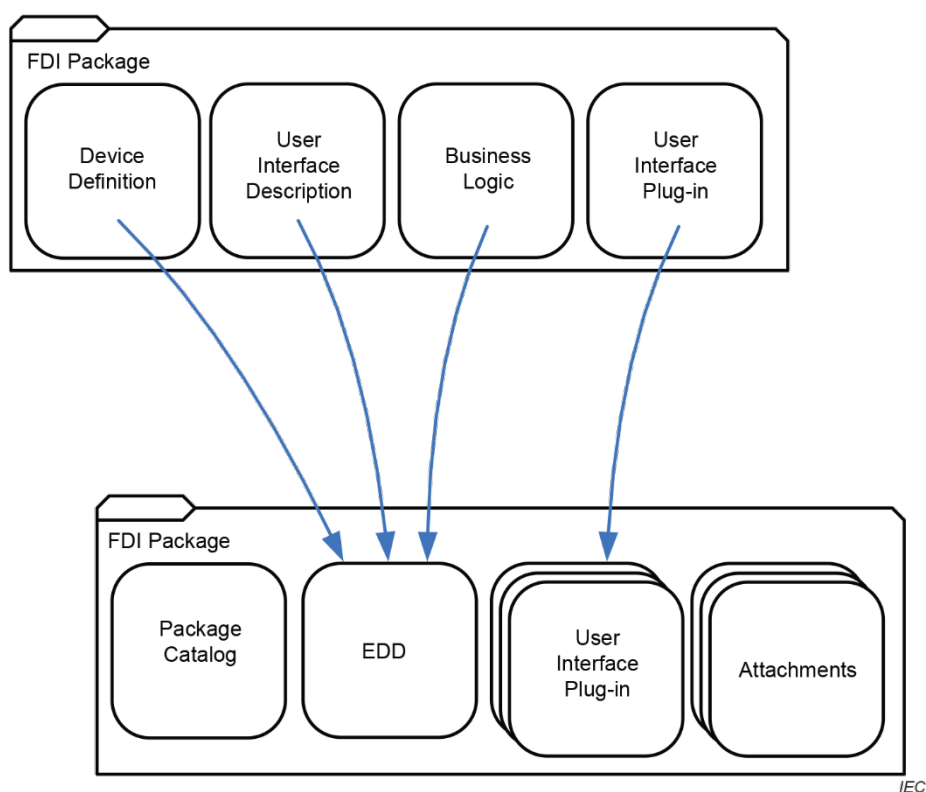


Figure 3 – Architectural mapping

The Electronic Device Description (EDD) corresponds to the Device Definition, the User Interface Description, and the Business Logic functional elements. A set of physical User Interface Plug-ins corresponds to the User Interface Plug-in functional element.

The other physical elements in the FDI Package, the Package Catalog and Attachments, provide support for basic mechanisms such as identification, versioning and deployment, and distribution of manufacturer and/or protocol-specific information about the device and/or the User Interface Plug-ins.

4.2 FDI Package Elements

4.2.1 Package Catalog

The Package Catalog is a required element that provides information about the contents of the FDI Package including, but not limited to, identification and version information, device type information, hardware and input/output device requirements, FDI Technology Version, and protocol-specific characteristics.

The Package Catalog is used by an FDI Server to create a catalog of device types and to create DeviceType Nodes in the Information Model.

4.2.2 Electronic Device Description

The EDD is an element that provides Device Definition, User Interface Descriptions, and Business Logic to an FDI Server.

Subclause 4.3 specifies for which FDI Package types an EDD is required.

To maximize interoperability, the initial setup of a device shall be achievable solely with the User Interface Descriptions, Device Definition and Business Logic that are part of the EDD in the FDI Device Package. The use of User Interface Plug-ins is optional and targeted in particular for the complete setup of complex devices.

4.2.3 User Interface Plug-in

A User Interface Plug-in (UIP) is an element that enables an FDI Client to present a programmed user interface. The FDI Server only stores the UIP from a consumed package; it does not execute or interpret the UIP.

A UIP is referenced from a User Interface Description. Those references are reflected in the Information Model through functional groups (see IEC 62769-5). References to UIPs in the Information Model are logical through a unique reference. The physical structure of the UIP is not at the Information Model level. Physically, a single UIP may consist of one or more UIP Variants, each targeted at a specific platform and run-time environment.

Figure 4 illustrates the logical reference to a UIP in the EDD and the physical structure of that UIP. The EDD of the FDI Package references a globally unique identifier of the UIP. In addition, the Package Catalog also lists the UIPs required by the device type along with the versions of the UIP supported by the package.

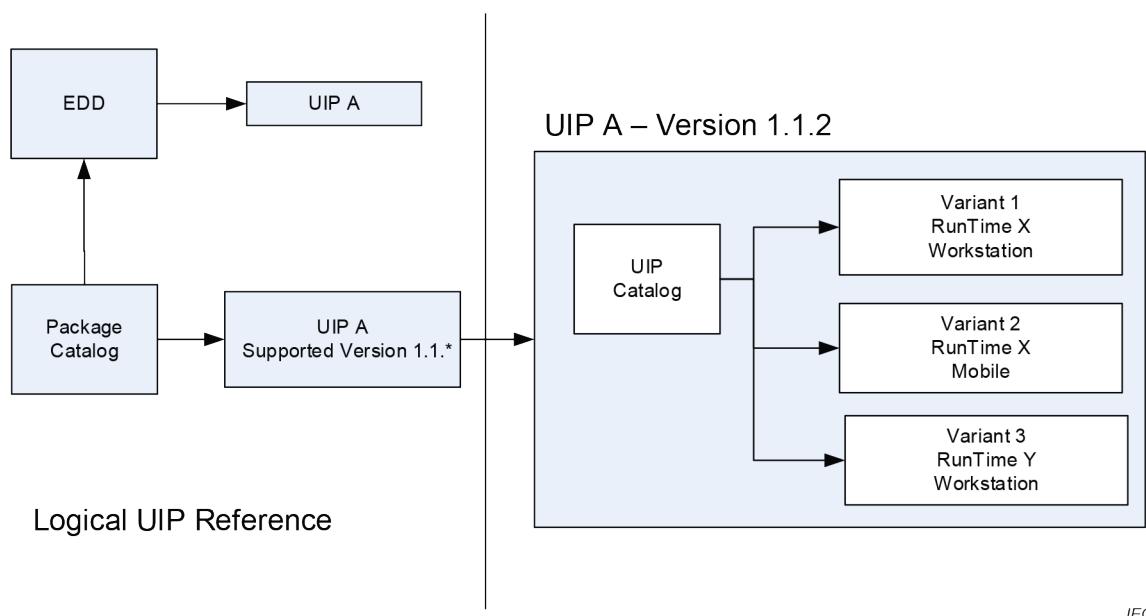


Figure 4 – User Interface Plug-in Reference Model

A UIP can be designed to meet different platform requirements since not all platforms support the same screen sizes and input devices.

When an FDI Client requests a UIP specifying the platform type, the deployment mechanism in the FDI Server looks for a UIP Variant that meets the platform type specified and returns it to the FDI Client.

The target platform defines specific screen resolutions and input devices that shall be supported by the UIP Variant. Available target platforms are described in Table 1.


Table 1 – UIP Platform

Platform	Characteristics
Workstation	A full client typically with a larger display, full keyboard and mouse input.
Mobile	A limited client typically with a smaller display and limited input capabilities.

Detailed platform requirements are technology dependent and specified in IEC 62769-6.

A UIP can be delivered internally (self-contained) or the UIP can be delivered through an FDI UIP Package. An EDD of one package shall not reference any UIP delivered self-contained with another package.

Figure 5 illustrates two FDI Device Packages referencing UIPs from an FDI UIP Package. In this example, the EDD from Device Package A and Device Package B references UIP B delivered by UIP Package C.

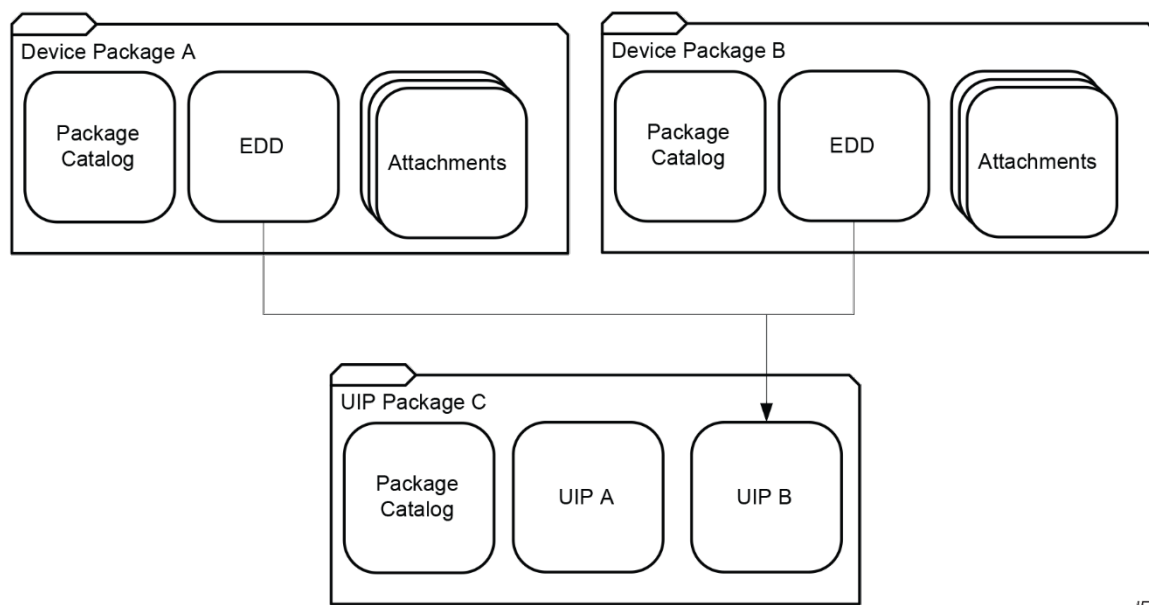

IEC

Figure 5 – Multiple FDI Packages referencing a common UIP

4.2.4 Attachment

Attachments provide device and protocol-specific support files, along with other files that are not directly used to integrate the device into the system, for example, product manuals.

The following types of Attachments are defined and reflected in the Package Catalog:

- Protocol-specific files (see 5.3.4.3);
- Documentation (see 5.3.4.2);
- Device pictures (see 5.3.4.1).

Some protocol-specific files are mandatory (see Annex F).

4.3 FDI Package Types

4.3.1 FDI Device Package

The FDI Device Package is intended to provide information about a device to a system. An FDI Device Package describes a single device type. Figure 6 shows the physical structure of an FDI Device Package describing a single device type. Details about how to create a package for a modular device is described in Annex I.

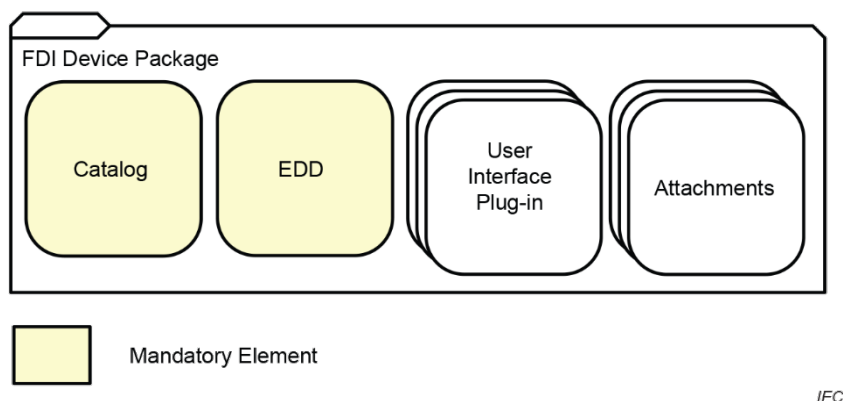


Figure 6 – FDI Device Package

The FDI Device Package shall have a single Package Catalog.

An FDI Package for simple Devices contains one EDD. For modular Devices, multiple EDDs may exist (see Annex I).

The FDI Device Package may include one or more User Interface Plug-ins.

The FDI Device Package may include Attachments.

4.3.2 FDI Communication Package

The FDI Communication Package is intended to provide information about a single FDI Communication Device. The group of FDI Communication Devices splits into two sub-groups.

- FDI Communication Packages for Gateways – Contain everything required to describe all device functions and logic required to bridge between different communication protocol networks, including the bridging algorithms (details are described in IEC 62769-7).
- FDI Communication Packages for FDI Communication Servers – Contain basic information to describe the communication device and to integrate it into the FDI Host but also to create a valid reference to the external FDI Communication Server application. This application shall not be delivered as part of the FDI Communication Package. The FDI Communication Server provides access to single field devices or field device networks (details are described in IEC 62769-7).

Requirements to the FDI Communication Package content that are specific for FDI Communication Servers are defined in Annex J.

However, representatives of both groups are integrated into FDI Hosts by using FDI Communication Packages. Their physical structure is shown in Figure 7. Binary components necessary to communicate to the communication hardware shall be provided outside the scope of this FDI Communication Package.

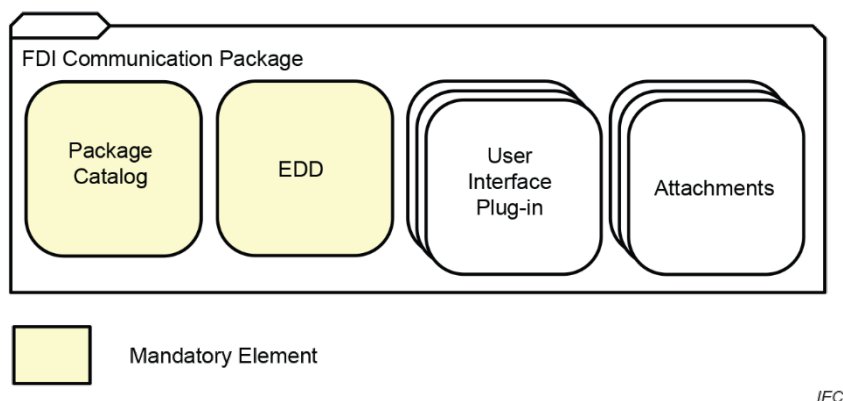


Figure 7 – FDI Communication Package

4.3.3 FDI UIP Package

The FDI UIP Package delivers User Interface Plug-ins to an FDI Server. It is used to distribute one or more UIPs that are intended to be shared by several device types. Its physical structure is illustrated in Figure 8.

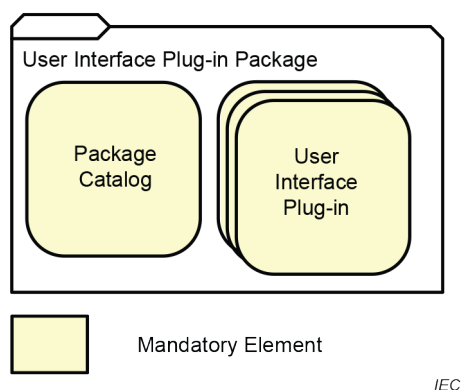


Figure 8 – FDI UIP Package

The FDI UIP Package shall have a Package Catalog and one or more User Interface Plug-ins.

4.3.4 FDI Profile Package

An FDI Profile Package provides information for creating a device type node that can be associated with a class of devices implementing a common set of parameters and functions (described in profiles or profile like definitions created by, for example, communication foundations or similar interest groups).

Conceptually, an FDI Profile Package provides information that is a super class of an FDI Device Package. The FDI Profile Package is represented in Figure 9.


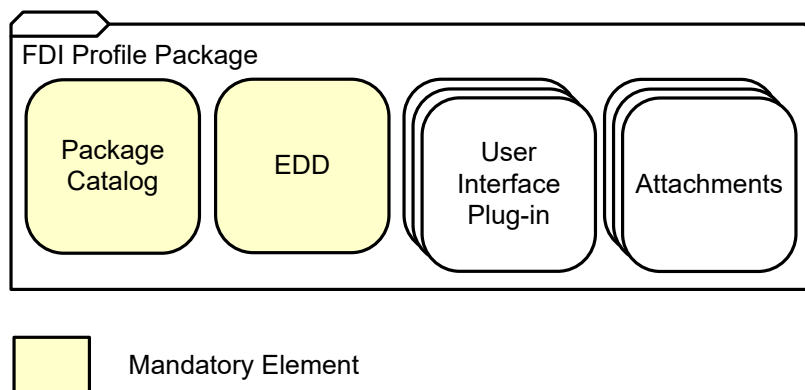


Figure 9 – FDI Profile Package

These packages enable integration of devices without having a specific FDI Device Package. FDI Profile Packages only support standard functionalities as defined by the corresponding communication protocol and application profiles (Annex F).

An FDI Profile Package shall be self-contained. For example, if a Profile B extends the definition of a Profile A, then the FDI Profile Package for the Profile B shall include a complete definition of Profile B, including the elements from Profile A.

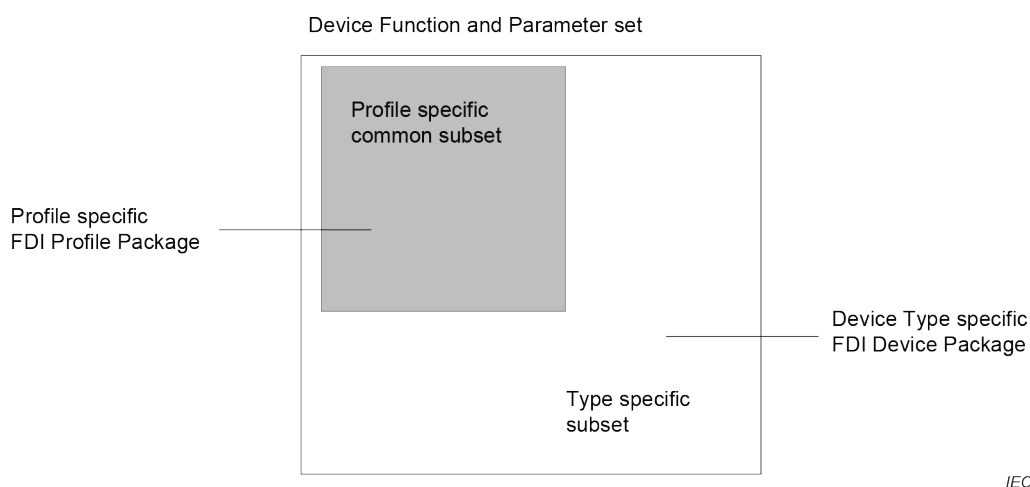

IEC

Figure 10 – Device Function and Parameter sets (type- and profile-specific)

Figure 10 represents the entire functionality of a device. Some of the functionality conforms to a specific communication profile, which may be accessed by using an FDI Profile Package. If there is a need to access Device Type specific functionality, in addition to the common functionality, then an FDI Device Package is required.

The detailed description of the communication protocol-specific requirements is not part of this document.

An automatic FDI Package selection implementation (launching FDI Packages matching a connected physical device) typically would search first for available Device Type specific FDI Device Packages. If the specific package is not available, the profile specific FDI Profile Package is loaded (if available). This behavior, however, is system-specific.

5 FDI Package implementation

5.1 Packaging technology

The FDI Package's format complies with the Open Packaging Convention as specified by ISO/IEC 29500-2. The Open Packaging Convention specification is designed to represent a broad range of applications. The technology was designed to provide a mechanism for delivering, deploying, and utilizing a set of logically and physically related components in a flexible, extensible, efficient, and open manner.

Subclause 5.2 clarifies the use of specific elements of the Open Packaging Conventions specification.

The naming conventions for the FDI Package file are described in Annex A. FDI Package creation fundamentals are described in Annex B. An example FDI Device Package implementation is described in Annex D.

NOTE *fdi-cooperation.com* was used when the FDI Cooperation LLC existed. The URL has not been changed to not endanger consistency. The URL does not indicate the current technology ownership and may not point to a valid address.

5.2 Use of Open Packaging Conventions

5.2.1 Unknown parts

Unknown parts are all parts not defined in this document or ISO/IEC 29500-2. Unknown parts may exist as the FDI specification is updated and the legacy FDI Server may not have knowledge of these additional parts. Unknown parts shall be ignored by the FDI Server to enable forward compatibility.

5.2.2 Invalid parts

Invalid parts are those parts that do not conform to the naming guidelines or that do not associate with content types specified in this document or ISO/IEC 29500-2. Invalid parts shall not be used in an FDI Package.

5.2.3 Unknown relationships

Unknown relationships are those relationships that are not defined in this document or ISO/IEC 29500-2. Unknown relationships shall be ignored by an FDI Package consumer.

5.2.4 Interleaving

All parts of the FDI Package shall be laid out using simple ordering. The package producer shall not interleave parts.

5.2.5 Core properties

The core properties are not used in the FDI Package Model and shall be ignored by all FDI Package consumers.

5.2.6 Thumbnails

The thumbnail is an optional part of an FDI Package.

5.2.7 Digital signatures


The use of digital signatures as specified in ISO/IEC 29500-2 is a mandatory part of an FDI Package. For more details, see Clause 7.

5.3 FDI Package Parts

5.3.1 Package Catalog

5.3.1.1 Format

The Package Catalog part is an XML file whose schema is defined in Annex E. An FDI Package shall have only one Package Catalog. The Package Catalog shall be identified by a single package relationship. The root element of the file is Catalog. The structure of a Catalog element is illustrated in Figure 11.

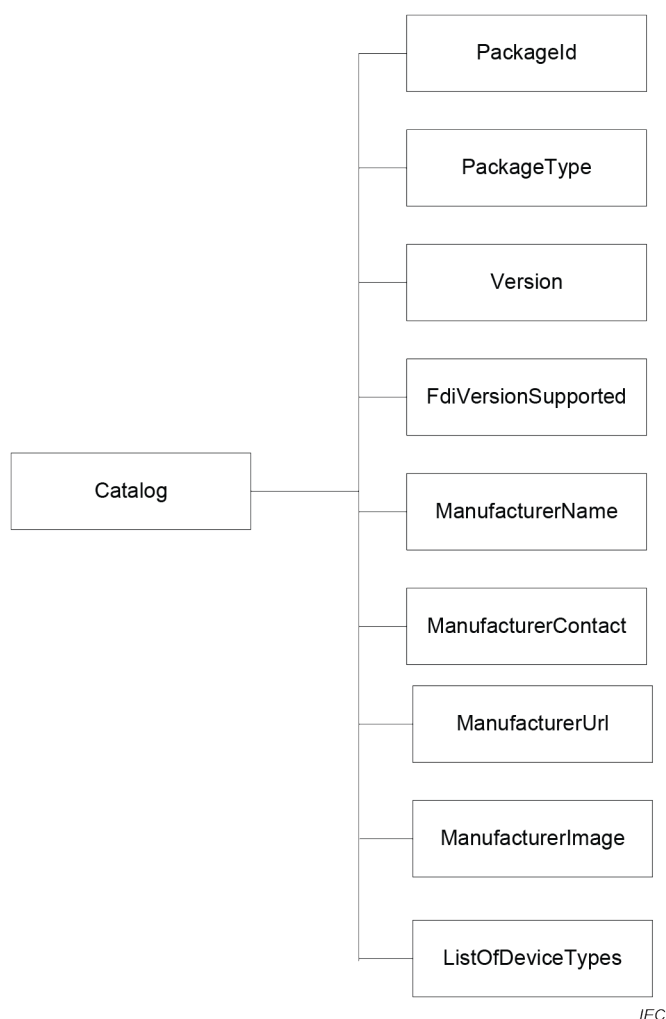

IEC

Figure 11 – Catalog Element

The Package Catalog part is described in Table 2.

Table 2 – Package Catalog Part

Part	Content
Content Type	application/vnd.fdi.package.catalog+xml
Root Namespace	http://fdi-cooperation.com/2010/package-catalog
Source Relationship	http://fdi-cooperation.com/2010/relationships/package-catalog
Filename	catalog.xml

5.3.1.2 Content

The schema for the Package Catalog is described in Annex E.

5.3.2 Electronic Device Description

5.3.2.1 Format

The EDD is an encoded file using the Electronic Device Description Language (EDDL) in accordance with 5.3.2.2.

The format of the EDD part is described in Table 3.

Table 3 – EDD part

Part	Content
Content Type	application/vnd.fdi.package.edd
Root Namespace	Not applicable
Source Relationship	http://fdi-cooperation.com/2010/relationships/edd
Filename	Not specified

5.3.2.2 Content

The EDDL is specified in IEC 61804. FDI specific rules for EDDs are described in Annex K.

5.3.3 User Interface Plug-in

5.3.3.1 Format


An FDI Package may contain one or more User Interface Plug-in parts. All User Interface Plug-in parts shall be identified by a package relationship.

The User Interface Plug-In represents a container element for UIP Variants (see 5.3.3.2.2.2), which contain the physical representation of a UIP (different variants for different platforms) that is consumed and executed by an FDI Client. A User Interface Plug-in shall at least provide one UIP Variant.

The variants are packaged into a single User Interface Plug-in using Open Packaging Convention as specified in 5.3.3.2. The User Interface Plug-in is not directly consumed by an FDI Server. The User Interface Plug-in is an optional part of different FDI Package types as specified in 4.3. The User Interface Plug-in is illustrated in Figure 12.

The UIP version information as well as the update and upgrade behavior shall follow the rules and concepts described in IEC 61804-1.

The default locale for UIPs and all contained variants is English (US). Optional language support is allowed according to market needs.

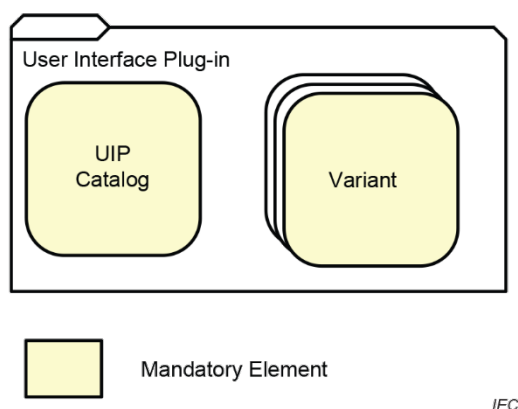

IEC

Figure 12 – User Interface Plug-in

The format for the User Interface Plug-in part is described in Table 4.

Table 4 – User Interface Plug-in part

Part	Content
Content Type	application/vnd.fdi.package.uip
Root Namespace	Not applicable
Source Relationship	http://fdi-cooperation.com/2010/relationships/uip
Filename	extension shall be .uip

5.3.3.2 Content

5.3.3.2.1 Use of Open Packaging Convention

5.3.3.2.1.1 Core

Core Properties are not used and shall be ignored by all FDI UIP Package consumers.

5.3.3.2.1.2 Thumbnails

Thumbnails are not used and shall be ignored by all FDI UIP Package consumers.

5.3.3.2.1.3 Digital Signatures

Digital signatures might be necessary for UIP Variants (see 5.3.3.2.2.2) depending on the implementation technology. Implementation technology details and necessary mechanisms to be implemented are described in IEC 62769-6.

The User Interface Plug-in as such however shall not be signed or applied signatures shall be ignored by the consuming FDI component.

5.3.3.2.2 User Interface Plug-in Parts

5.3.3.2.2.1 UIP Catalog

5.3.3.2.2.1.1 Format

The UIP Catalog is an XML file describing the properties of a UIP that are necessary to create the Information Model nodes in the FDI Server side and for deployment (FDI Server to FDI Client).

The UIP Catalog also hosts information about the physical starting element that has to be called/executed from a UIP Variant on the FDI Client. The format and type of this starting element are technology specific and therefore defined in IEC 62769-6.

The UIP Catalog shall be identified by a single package relationship.

The UIP Catalog part is an XML file whose schema is defined in Annex E. A User Interface Plug-in shall have only one UIP Catalog. The root element of the file is UipCatalog. The structure of the UipCatalog element is illustrated in Figure 13.

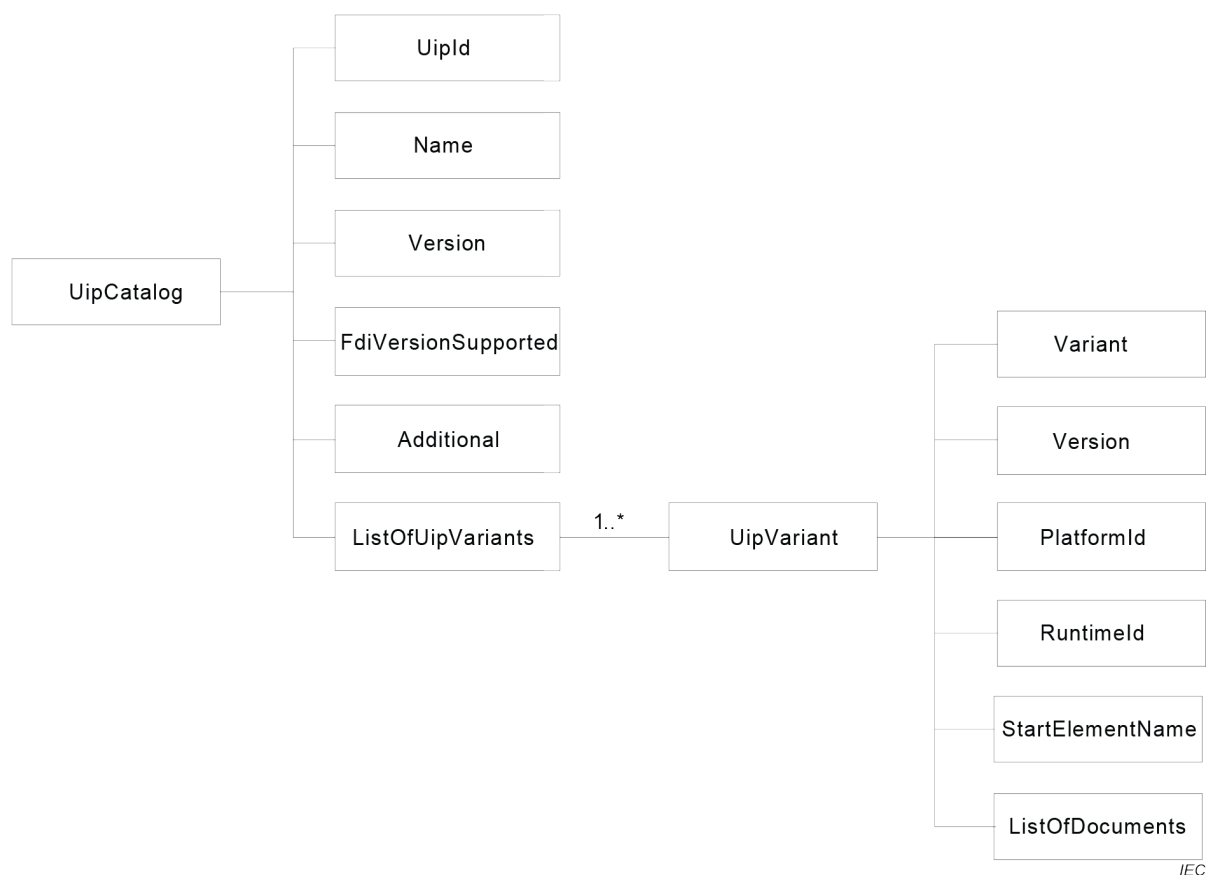


Figure 13 – UIP Catalog

The UIP Catalog part is described in Table 5.

Table 5 – UIP Catalog Part

Part	Content
Content Type	application/vnd.fdi.package.uip.catalog+xml
Root Namespace	http://fdi-cooperation.com/2010/uip-catalog
Source Relationship	http://fdi-cooperation.com/2010/relationships/uip-catalog
Filename	uipcatalog.xml

5.3.3.2.2.1.2 Content

The schema for the UIP Catalog is described in Annex E.

5.3.3.2.2.2 UIP Variant

5.3.3.2.2.2.1 Format

A UIP Variant can be provided to support different versions of the base technology. It is a container for all physical files that represent the UIP Variant, independently of their type and number. The UIP Variant shall use the ZIP file format (compressed archive, application/zip media type) as bundling technology.

Use of the ZIP specification for bundling variants shall be constrained to the requirements in ISO/IEC 29500-2:2016, Annex C.

The UIP Variant part is described in Table 6.

Table 6 – UIP Variant Part

Part	Content
Content Type	application/zip
Root Namespace	Not applicable
Source Relationship	http://fdi-cooperation.com/2010/relationships/uiip-variant
Filename	Not specified

5.3.3.2.2.2.2 Content

The content of the UIP Variant is specified in IEC 62769-6.

5.3.4 Attachments

5.3.4.1 Image

An FDI Package image attachment is a computer icon that represents the device type. Multiple images and resolutions of the device type are supported. Each image shall be PNG format and restricted to the following pixel resolutions: 256 × 256, 64 × 64, 32 × 32 or 16 × 16. The image part is described in Table 7.

If the Device Package is supposed to support handheld devices the provided image shall be available in a resolution of 16 pixels × 16 pixels.

Table 7 – Image Part

Part	Content
Content Type	image/png
Root Namespace	Not applicable
Source Relationship	http://fdi-cooperation.com/2010/relationships/attachment-image
Filename	Not specified

5.3.4.2 Documentation

Documentation parts include documentation such as product manuals and data sheets and shall be encoded in PDF or plain text format. The documentation Attachment is described in Table 8.

Table 8 – Documentation Part

Part	Content
Content Type	Application/pdf (specified in ISO 32000-1) Text/plain
Root Namespace	Not applicable
Source Relationship	http://fdi-cooperation.com/2010/relationships/attachment-documentation
Filename	Not specified

5.3.4.3 Protocol Support File

The protocol support file part is a file not defined by this document but necessary to integrate the product into a system. Those files usually extend the integration mechanism provided in the basic part of the FDI Device Package (EDD, UIPs) by protocol-specific means.

Those files shall be neither executables nor binary files of any kind. In addition, those files shall not replace any mandatory elements of an FDI Device Package.

A list of protocol support files for the different communication protocols are defined in Annex F. The protocol-specific support file part is described in Table 9.

Table 9 – Protocol Support File Part

Part	Content
Content Type	Not specified here
Root Namespace	Not specified here
Source Relationship	http://fdi-cooperation.com/2010/relationships/attachment-protocol
Filename	Not specified here

5.3.4.4 FDI Registration Certificate

5.3.4.4.1 Format

The FDI Registration certificate is a single XML document per FDI Package, which can be present (optional FDI Package Element). In the scope of an FDI Package, it is a Package Element of the type Attachment.

Table 10 – FDI Registration Certificate Part

Part	Content
Content Type	application/vnd.fdi.package.registrationCert+xml
Root Namespace	Not specified here
Source Relationship	http://fdi-cooperation.com/2010/relationships/attachment-registrationCert
Filename	RegistrationCert.xml

5.3.4.4.2 Content

The FDI Registration Certificate is machine readable and is represented in XML Format and has the content and structure in accordance with Figure 14. The FDI Registration Certificate may be signed with a detached signature within the same document.

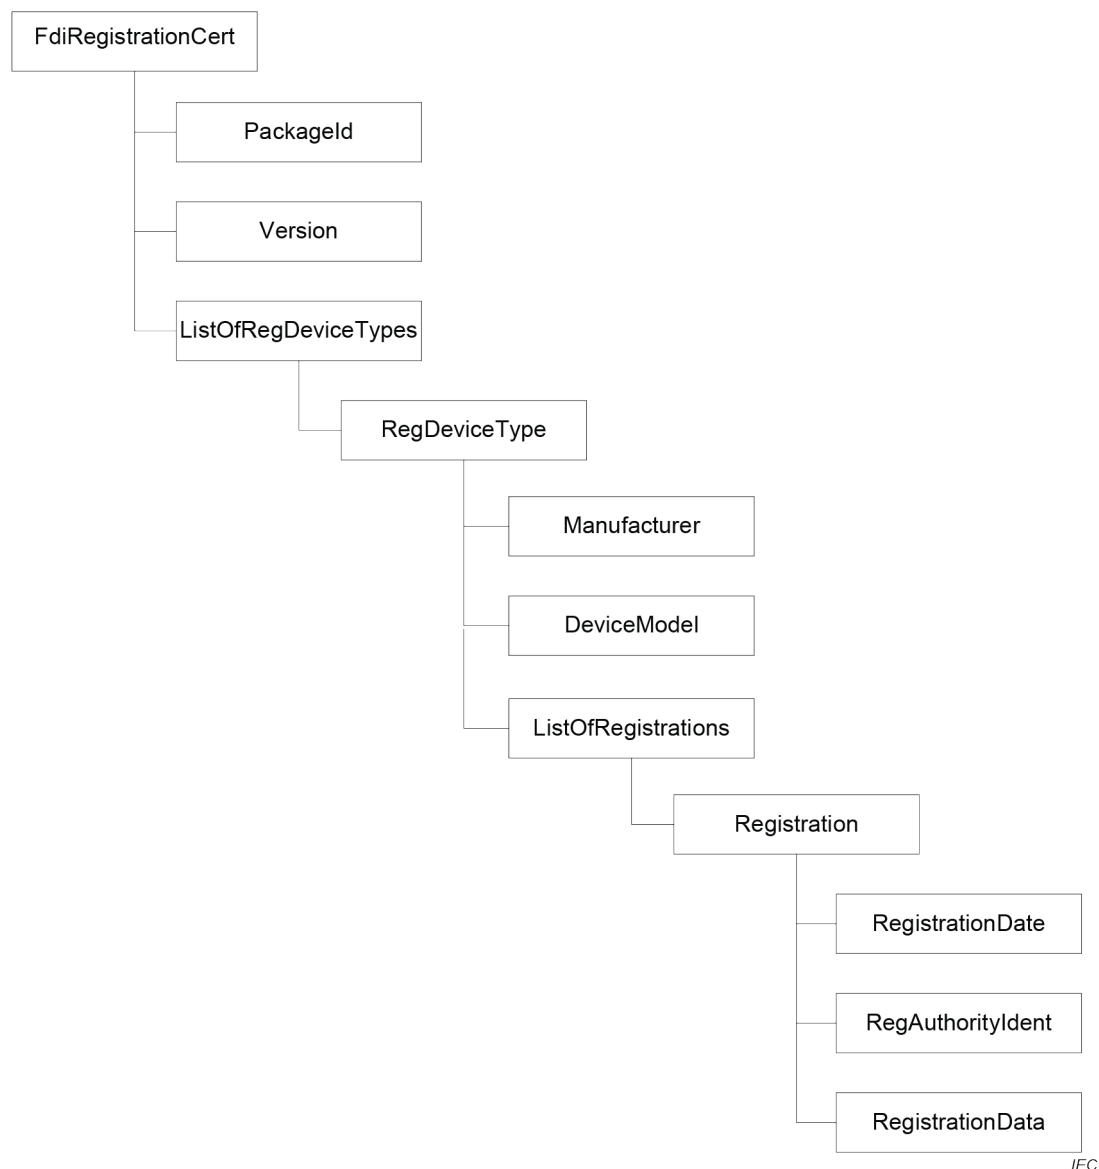


Figure 14 – FDI Registration Certificate

The schema for the FDI Registration Certificate is described in Annex E.

6 FDI Package Versioning

6.1 Version scheme

FDI elements use a major.minor.revision numeric versioning scheme for package and package elements. The initial version shall be 1.0.0.

Incompatible changes are indicated by incrementing the major number. Functional changes that still maintain compatibility to the major version are indicated by incrementing the minor number. Non-functional changes, such as editorial changes are indicated by incrementing the revision number. Rules for incrementing the version number are described in 6.3.

Examples of how to deploy different FDI Package types are described in Annex C.

6.2 Versioned elements

An FDI Package contains the version information that is described in Table 11.

Table 11 – Versioned Elements

Scope	Version Location	Schema Reference
FDI Package (see 5.3)	Package Catalog (see 5.3.1)	See Annex E, Version element of the Package complex type
UIP (see 5.3.3)	UIP Catalog (see 5.3.3.2.2.1)	See Annex E, Version element of the Uip complex type
UIP Variant (See 5.3.3.2.2.2)	UIP Catalog (see 5.3.3.2.2.1)	See Annex E, Version element of the UipVariant complex type


The following parts of the FDI Package have version mechanisms that are outside the scope of the FDI.

- EDD (see 5.3.2)
 - DD_REVISION and DEVICE_REVISION in accordance with IEC 61804-3
- Attachments (see 5.3.4)
 - Image (see 5.3.4.1)
 - Documentation (see 5.3.4.2)
 - Protocol Support File (see 5.3.4.3 and Annex F)

6.3 Version Hierarchy

The version change of FDI Package elements can influence the version of overlaying elements. Figure 15 illustrates those influences. The orange boxes show elements that are versioned using the FDI specific version mechanisms described in IEC 62769-1. The green boxes indicate elements that have version mechanisms that are not described by FDI. The white boxes describe elements that are not explicitly versioned.

All elements in the tree structure shown below influence the version of the parent elements in accordance with Table 12. Their version change causes a version change of the overlaying element.

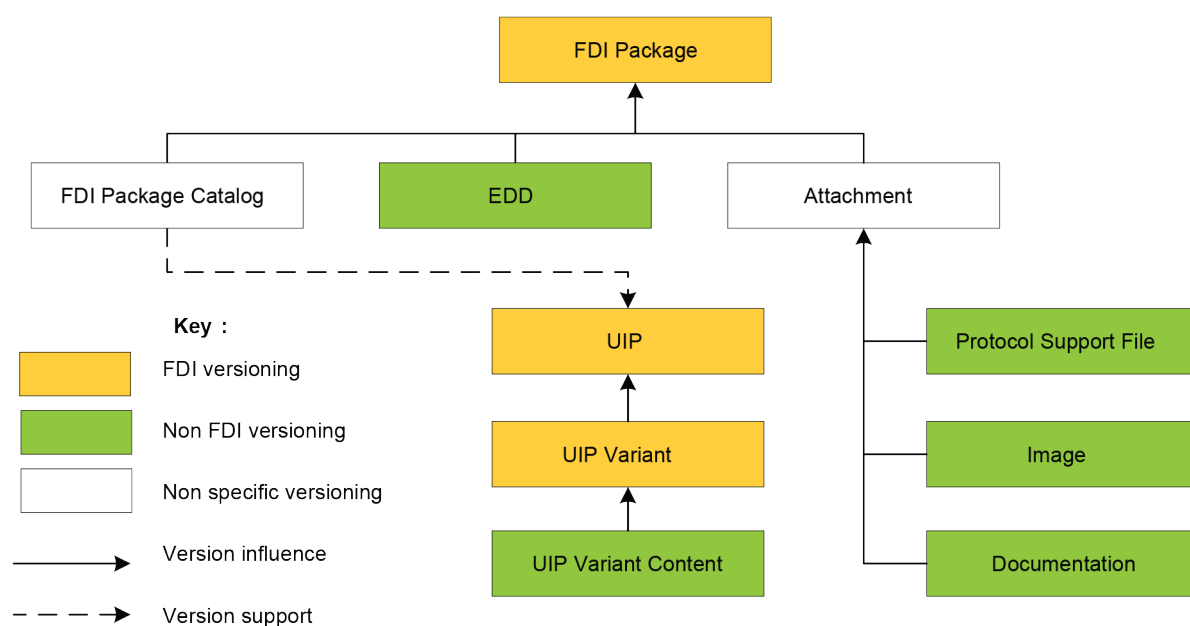

IEC

Figure 15 – Version Hierarchy

Table 12 describes a selection of possible changes to the different FDI Package elements and their direct influence on the FDI Package version. At a minimum, successive FDI Package versions shall increment the revision number.

Table 12 – Influence on FDI Package Version

Element	Version Level			FDI Package Type	
	Major	Minor	Revision	Device/ Profile/ Comm Package	UIP Package
Package Catalog	n/a	Modifying existing compatibility references. Change to ListOfSupportedUips (see Annex E). Only addition of wildcards is allowed for modifications to existing VersionSupported (see Annex E)	Editorial	x	x
EDD	Increment Device Revision	Increment DD_REVISION with same DEVICE_REVISION	n/a	x	
Attachments	Changes to Protocol Support Files	Changes to Protocol Support Files	Changes to Documentation, Images, Protocol Support Files	x	
UIP	Incompatible changes Technology driven	Functional enhancement Technology driven	Bug fix Technology driven	x	x

Annex G describes typical FDI Package life cycle use cases for a better understanding of the version hierarchy and the versioning concept.

6.4 UIP Compatibility

UIPs are delivered in an FDI Device Package, FDI Communication Package, FDI Profile Package or an FDI UIP Package. A UIP delivered in an FDI UIP Package shall not be delivered in any other package type. Therefore, an FDI Package may not be self-contained.

FDI Device Packages, FDI Communication Packages and FDI Profile Packages do not directly reference UIPs. Instead, the Package Catalog defines the SupportedUp (see Annex E) to define compatible UIPs. More than one installed UIP may be compatible with a given FDI Package version. This permits the FDI Package creators to provide bug fixes and functional enhancements to the FDI Package without the need to provide a major release of an FDI Package.

The version support described in the Package Catalog is defined as follows:

- The major release number shall be specified explicitly as a single number.
- The minor release number and revision number shall be specified explicitly as a single number or as a wildcard (*). If the minor release number is specified as a wildcard, then the revision number shall also be specified as a wildcard.

NOTE Examples of valid compatible version numbers are 1.3.1, 1.3.*, 1.*.*.

The use of a wildcard indicates that all minor numbers and/or revision numbers are compatible with the FDI Package. If the SupportedUp has been defined by using wildcards and there is more than one version of the UIP available, the FDI Server shall transfer the latest version to the FDI Client. System-specific implementations that allow coexistence of minor release or revisions releases regardless of version support wildcards are outside the scope of this document.

Figure 16 illustrates an example of selecting the most recent compatible UIP.

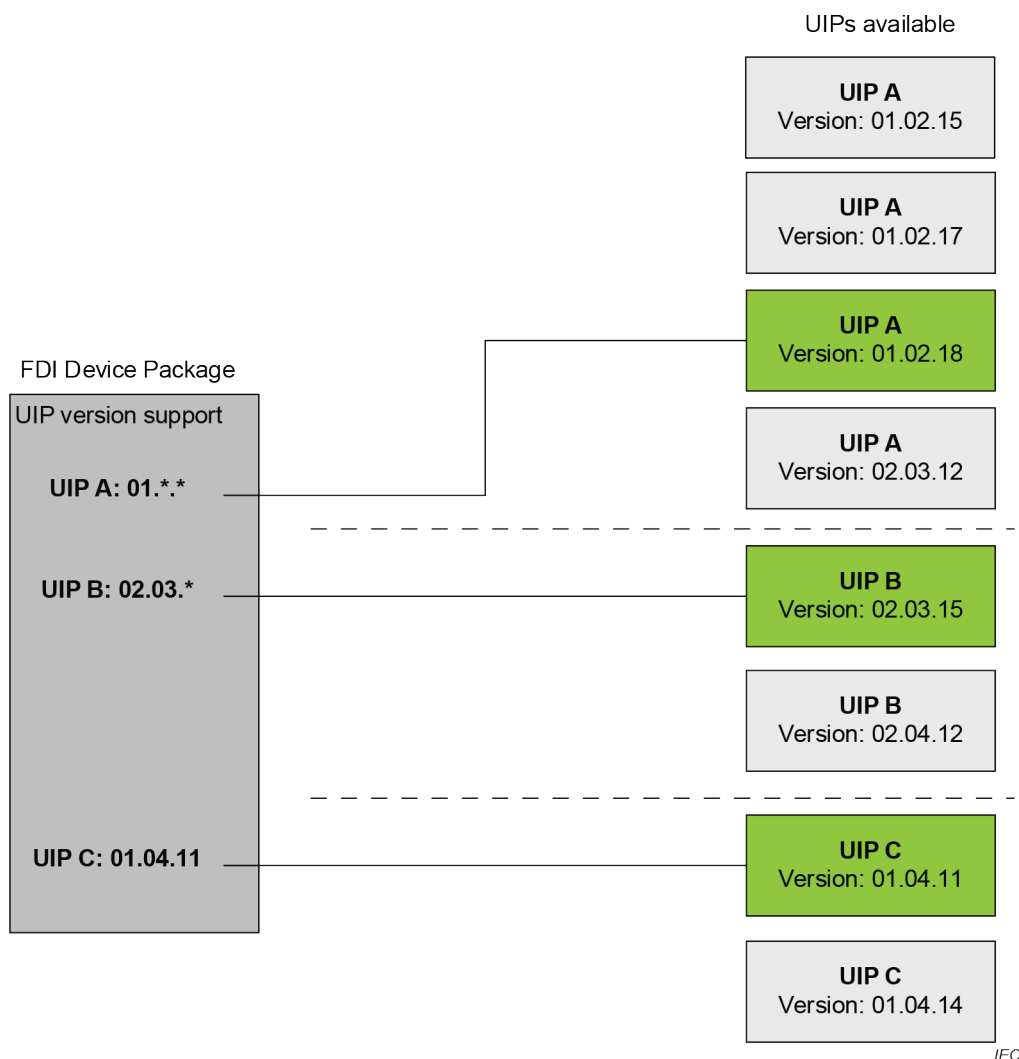


Figure 16 – UIP Version Support concept

7 Digital Signatures and Registration Certificates

7.1 Signed Elements and Certification documents

The FDI Package signing policy defines that the entire FDI Package shall be signed by the FDI Package originator (see 7.3). FDI Packages that have been registered by an FDI Registration Authority should contain an FDI Registration Certificate (special attachment, see 5.3.4.4), which shall be signed by an FDI Registration Authority (see 7.3). FDI Packages are registered if they are successfully conformance tested (see B.2.4).

Registered FDI Packages should carry one or more digitally signed FDI Registration Certificates to:

- indicate that the FDI Packages has been registered by an official FDI registration authority;
- indicate that the files in the package, which had been central for registration of the package, have not been altered after submission for registration.

FDI Packages as a whole (the surrounding entity covering all elements) shall be signed to:

- identify the originator (the signer) of the FDI Package;
- verify that the signed FDI Package hasn't been altered after the signature was applied.

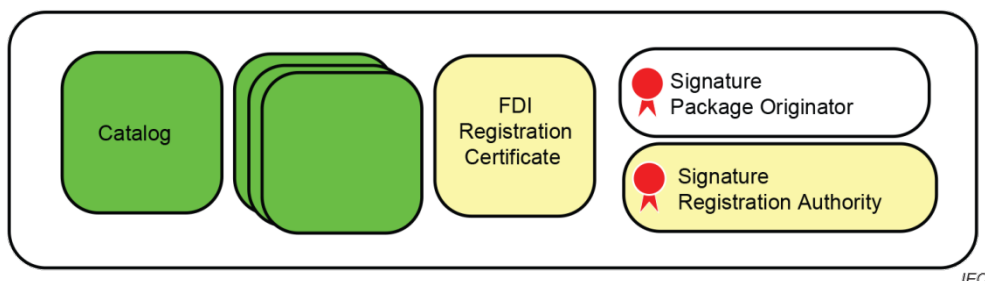


Figure 17 – FDI Package signing

The FDI Package originator first sends a package to the FDI Registration Authority. They perform defined conformance tests and additional tests according to their specific rules and test descriptions or agreements.

After successful testing, those Registration Authorities might issue an FDI Registration Certificate, which shall be signed by the individual FDI Registration Authority. The FDI Registration Certificate may contain more information about the registration, for example a hash on the parts of the FDI Package which had been covered by the conformance tests. The FDI Registration Certificate is incorporated into the FDI Package for release. After adding the FDI Registration Certificate to the FDI Package content, the package is again signed and afterwards released/published by the originator.

The FDI Package originator therefore takes over the responsibility that the FDI Registration Certificate is trustable by signing the entire FDI Package he releases.

7.2 Signing mechanism

All signatures within the FDI Package shall be made in accordance with the mechanism defined in ISO/IEC 29500-2. In addition to ISO/IEC 29500-2, the signature shall fulfill the following requirements:

- The information needed to validate the signature shall be part of the digital signature, i.e. the KeyInfo element specified in XML Signature Syntax and Processing is mandatory.
- Certificates used for signing shall be rooted in a Certificate Authority which is included in the trusted CAs of the Microsoft Windows Certificate Store¹.
- The algorithms used in creation of the signature (for hashing and encryption/decryption) shall be from the list of NIST recommended algorithms in FIPS 140-2, Annex A (NIST).
- The signature shall include a trusted timestamp in compliance with XAdES (XML Advanced Electronic Signatures – ETSI EN 319 132-1).
- Any signature shall include a CommitmentTypeIndication in accordance with ETSI TS 101 733. The used commitment types are specified in 7.3.

¹ Microsoft Windows Certificate Store is the trade name of a product supplied by Microsoft®. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

7.3 FDI Package Originator, FDI Registration Authority

The FDI Package Originator and the FDI Registration Authority have the following responsibilities:

- An FDI Package originator officially publishes an FDI Package and signs it to ensure the integrity of the FDI Package. The FDI Package can be created by a device vendor or a software solution provider. The publisher of an FDI Package may be a different person. The commitment type is ProofOfOrigin.
- An FDI Registration Authority has the right and the ability to perform FDI conformance tests on FDI Packages and to issue FDI Registration Certificates, Typically interest groups representing an FDI supported communication protocol or their authorized partners. The commitment type is ProofOfApproval.

7.4 FDI Host behavior

An FDI host system shall display a warning message when the FDI Package import procedure recognizes that:

- a digital signature on the package is not present or does not include all entities (files) inside the package,
- the digital signature as such is not trustable,
- the signature is broken, which indicates that the package has been modified after signing.

Additional security measures to be taken, if the warning message has been displayed, are in the responsibility of the FDI host system.

An FDI host system should display an information message showing which parts of the ones having gone into the registration have been changed when the FDI Package import procedure recognizes that:

- the unique identifier (PackageID) and the version (as defined in Annex E) of the FDI Package does not match the same information given as a part of the FDI Registration Certificate file;
- there is no FDI Registration Certificate present in the FDI Package;
- the included FDI Registration Certificate is not signed, the signature is not trustable, or the signature is broken.

An FDI host system can check the signature and certification status by reading the FDI Registration Certificate. A host shall provide a configuration, which allows to import an FDI Package, which does not include an FDI Registration Certificate. The functionality of this FDI Package shall not be limited.

Annex A (normative)

File name conventions

A.1 Identification

Identification naming conventions shall be utilized to provide a unique way of identifying complete FDI Packages as well as elements of FDI Packages. Adherence to the identification rules will promote interoperability across systems. However, the names themselves shall not be the only mechanism for deployment.

Traditionally, machine-readable naming conventions have been utilized to uniquely link a file to a specific device and facilitate the import and use of device interface files, such as an EDD, making it difficult for users to determine if the required file was available in the file system. Because an FDI Package is the visible element to the user, a human-readable format is preferred over that of a machine-readable version.

A.2 FDI Package filename convention

Individual FDI Packages shall be identified by unique file names, which shall consist of the manufacture, the model or type, the revision and the protocol supported. Owing to filename persistence problems, the file name shall not be the only means to identify an FDI Package. Secure means of identifying an FDI Package shall be utilized to prevent inappropriate mixing of device to FDI Packages.

The FDI Package shall use the following naming convention

<manufacturer>.<description>.<major>.<minor>.<revision>.<protocol>.fdix

Each element of the filename is described in Table A.1.

The following rules for naming an FDI Package shall apply:

- All FDI Packages shall use the .fdix extension.
- Maximum name length including .fdix extension: 128 characters.
- The file name shall not include a space.

NOTE The maximum file name length is limited to 128 characters to reduce the probability of a path exceeding the maximum value.

Table A.1 – FDI Package Naming Convention

Filename component	Description
manufacturer	String representation of the manufacturer name of the device. The manufacturer shall not include a period.
description	A brief description of the package. The description shall not include a period. For an FDI Device Package, a string representation of the device type name.
major	Two-character numerical representation of the major release of the FDI Package.
minor	Two-character numerical representation of the minor release of the FDI Package.
revision	Two-character numerical representation of the revision of the FDI Package.
protocol	The communication profile family names are defined in the communication profiles (IEC 62769-1xx-x).

Annex B (informative)

FDI Package Creation

B.1 General

Annex B describes the fundamentals of a possible FDI Package creation process by using standardized development tools and components available.

B.2 Tools and Components

B.2.1 Overview

FDI Packages consist of several different components – which also might have relationships and dependencies to each other – that are developed by using different implementation technologies and that follow different standards. This complex structure of FDI Packages requires a tool support to make an easy and economic development and maintenance possible.

B.2.2 FDI Reference Implementation/Common EDD Engine

The FDI Reference Implementation, including a common EDD Engine, ensures that a common implementation is used for an FDI Package implementation and test that has a defined behavior. The FDI Reference Implementation is part of both tools mentioned below.

B.2.3 FDI Package IDE

The FDI Package IDE provides everything that is necessary to manage development projects for the different kind of FDI Packages, the development of the descriptive parts, the linking of all remaining package parts, but also to do the actual packaging of the package.

B.2.4 FDI Device Package Conformance Test Tool

A developed FDI Package and especially FDI Device Packages are tested to prove the conformance of the implementation to the FDI Specification. This ensures interoperability. The conformance test is done by using the FDI Device Package Conformance Test Tool that executes defined test cases with the FDI Reference Implementation and the developed FDI Package.

B.3 Development

B.3.1 FDI Package core development

The FDI Package IDE allows the creation of a development project for the FDI Package, including the project type and version information. This development project can be used during the complete life cycle of the FDI Package. A development project wizard might be available to speed up the project creation process.


An editor component coming with the FDI Package IDE is available to implement the descriptive part (EDD) of the FDI Package. Features such as syntax checks, code folding, auto complete and wizards for complex constructs are available to support an efficient and safe development.

The FDI Package (depending on the FDI Package type) consists of several FDI Package parts. A project management component is also part of the FDI Package IDE, which allows the linkage of external FDI Package parts to a specific FDI Package development project. As soon as the developer has linked all FDI Package parts to the development project (and has also implemented EDD relationships if necessary), the FDI Package can be bound and packaged.

The FDI Package IDE generates parts of the Package Catalog depending on linked FDI Package parts, development project information and EDD source code. Some parts of the FDI Package, however, cannot be developed by using the FDI Package IDE. Examples are given in B.3.2 and B.3.3 and shown in Figure B.1.

B.3.2 User Interface Plug-in development

User Interface Plug-ins are developed using well known implementation technologies (for example, Microsoft.NET²). There are several powerful development tools available to use those implementation technologies (for example, Microsoft Visual Studio³). Those tools should be used to implement the User Interface-Plug-ins needed. The ready implemented Plug-ins can then be imported into the FDI Package IDE development project to be referenced in the EDD and to be packaged into the FDI Package for release, but also to be tested under runtime conditions in conjunction with the descriptive part of the FDI Package. See also Figure B.1.

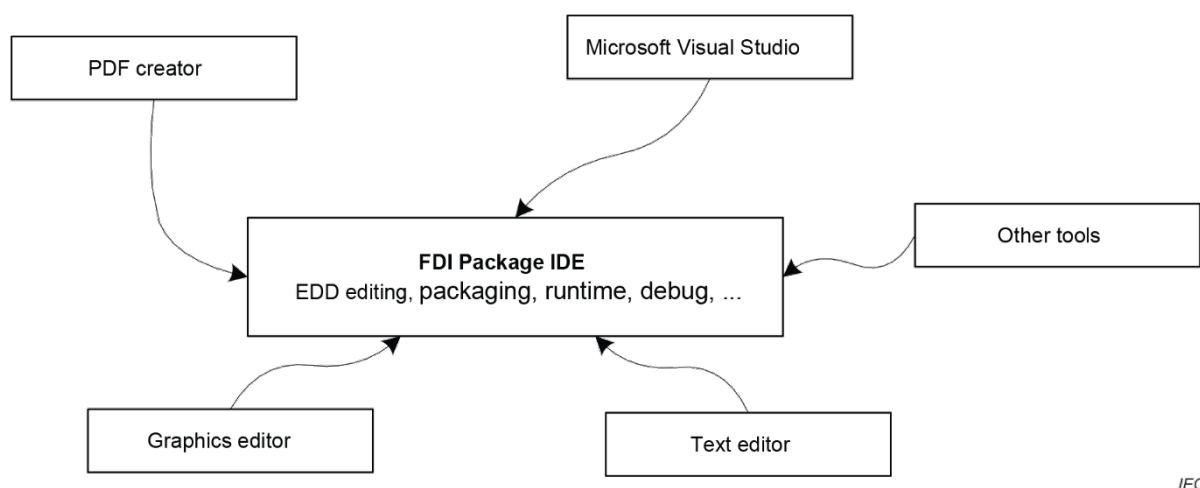

IEC

Figure B.1 – Tools used for FDI Package development

B.3.3 FDI Package Attachment development

There are different kinds of Attachments that can be incorporated into FDI Packages. Owing to the variety of possible and necessary Attachments, appropriate development tools depending on the type of Attachment shall be used to implement/create those. The Attachments can then be imported into the FDI Package IDE development project to be packaged into the FDI Package for release. See also Figure B.1.

² Microsoft.NET is the trade name of a product supplied by Microsoft Corporation. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

³ Microsoft Visual Studio is the trade name of a product supplied by Microsoft Corporation. This information is given for the convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

B.3.4 FDI Package binding and packaging

The last step of the FDI Package development is the packaging as such. In this development step, all developed and related parts of the FDI Package are packed according to this specification. Checks are performed to ensure consistency. The output can then be used for conformance testing and in systems.

B.3.5 Conformance Test

The use of the FDI Package Conformance Test tool which is also part of the FDI Package IDE to ensure the conformance of the FDI Package with the FDI specification marks the last step before releasing the product. The Conformance Test tool uses specified test cases with an FDI runtime engine to check the single features of the FDI that have or may be implemented into an FDI product (an FDI Package in this case).

Annex C (informative)

FDI Package deployment

C.1 General

Annex C describes sequence examples of how to deploy different FDI Package types to different system architectures. The sequence and detailed features are system-specific.

For FDI Servers, no conditional deployment of UIP Variants is defined because package content can be consumed by different kinds of FDI Clients.

For standalone FDI host systems, FDI Server and FDI Client application are a single integrated entity. A standalone FDI host system can perform conditional deployment of the UIP Variants in accordance with the integrated FDI Client capabilities.

C.2 Scenarios

C.2.1 FDI Package deployment to PC based client/server systems

C.2.1.1 FDI Device Packages/FDI Profile Packages/FDI Communication Packages

The following steps apply for the deployment of FDI Device Packages, FDI Profile Packages and FDI Communication Packages to an FDI Server.

- a) The user chooses an FDI Package from the file system.
- b) The system validates the FDI Package signature and integrity.
- c) The system reads the FDI Package Catalog root element as defined in 4.2.1 and verifies
 - that the PackageType shall be "Device", "Profile", or "Communication";
 - that the FDIVersionSupported shall be equal to the Major version (depending on the use of wildcards instead of actual version numbers, the Minor and the Revision part of the version information shall also be interpreted) of the FDI Server;
 - the version and PackageId against already installed versions of this device type and handles the update and upgrade accordingly. The deployment is aborted if there is a higher version installed since downgrades are not supported by the FDI.
- d) The system adds the FDI Package information to the system specific device catalog.
- e) The system reads all UIPs stored in the FDI Package and adds all UIPs and all available variants to the system specific UIP catalog.
- f) The system reads the ListOfSupportedUips for each device type and notifies the user if a required UIP is not installed.
- g) The system stores the entire FDI Device Package content.
- h) The system reads the EDD for each device type and creates Information Model (IM) type nodes.

C.2.1.2 FDI UIP Packages

The following steps apply for the deployment of UIP Packages to an FDI Server.

- a) The user chooses an FDI Package from the file system.
- b) The system validates the FDI Package signature and integrity.
- c) The system reads the FDI Package Catalog root element as defined in 4.2.1 and verifies
 - that the PackageType is "Uip";

- that the `FDIVersionSupported` is equal to the Major version (depending on the use of wildcards instead of actual version numbers, the Minor and the Revision part of the version information shall also be interpreted) of the FDI Server; and
 - the version and `Packageld` against already installed versions of this device type and handles the update and upgrade accordingly. The deployment is aborted if there is a higher version installed since downgrades are not supported by the FDI.
- d) The system reads the `ListOfSupportedUips` for each device type and notifies the user if a required UIP is not installed.
- e) The system stores the entire FDI Device Package content.
- f) The system reads all UIPs stored in the FDI Package and adds all UIPs and all available variants to the system specific UIP catalog.

C.2.2 FDI Package deployment to an FDI standalone system

C.2.2.1 FDI Device Packages/FDI Profile Packages/FDI Communication Packages

The following steps apply for the deployment of FDI Device Packages, FDI Profile Packages and FDI Communication Packages to an FDI standalone system.

- a) The user chooses an FDI Package from the file system.
- b) The system validates the FDI Package signature and integrity.
- c) The system reads the FDI Package Catalog root element as defined in 4.2.1 and verifies
- that the `PackageType` is "Device", "Profile", or "Communication";
 - that the `FDIVersionSupported` is equal to the Major version (depending on the use of wildcards instead of actual version numbers, the Minor and the Revision part of the version information shall also be interpreted) of the FDI Server; and
 - the version and `Packageld` against already installed versions of this device type and handles the update and upgrade accordingly. The deployment is aborted if there is a higher version installed since downgrades are not supported by FDI.
- d) The system reads all UIP Variants for all UIPs in the FDI Package and verifies
- that the `PlatformId` and `RuntimeId` is supported by the integrated FDI Client; and
 - the version and `UipId` against already imported UIP Variants and handles the update and upgrade accordingly. If there is already a higher version installed the import is aborted since downgrades are not supported by the FDI.
- e) The system adds the UIP information of matching and imported UIPs to the system specific UIP catalog.
- f) The system reads the `ListOfSupportedUips` for each device type and notifies the user if a required UIP is not installed.
- g) The system stores the relevant FDI Device Package content.
- h) The system reads the EDD for each device type and creates Information Model (IM) type nodes.

C.2.2.2 FDI UIP Packages

The following steps apply for the deployment of UIP Packages to an FDI standalone system.

- a) The user chooses an FDI Package from file system.
- b) The system validates the FDI Package signature and integrity.
- c) The system reads the FDI Package Catalog information, as defined in 4.2.1:
- the `PackageType` attribute is being checked (see Annex E) for "Uip"
 - the `FDIVersionSupported` shall be equal to the Major version (depending on the use of wildcards instead of actual version numbers, the Minor and the Revision part of the version information shall also be interpreted) of the FDI Server; and

- the system imports UIPs including UIP Variants and checks for already imported versions of the particular UIP and handles the update and upgrade accordingly. If there is already a higher version installed, the import is aborted since downgrades are not supported by the FDI.
- d) The system reads all UIP Variants for all UIPs in the FDI Package and verifies:
- that the PlatformId and RuntimeId is supported by the integrated FDI Client; and
 - the version and UipId against already imported UIP Variants and handles the update and upgrade accordingly. If there is already a higher version installed, the import is aborted since downgrades are not supported by FDI.
- e) The system stores the relevant FDI Device Package content.

Annex D (informative)

Example

D.1 General

The purpose of Annex D is to provide an overview of ISO/IEC 29500-2 and an example FDI Device Package implementation. It is not intended to provide all the details that might be necessary for the implementation of an FDI Package.

Unless otherwise stated in Annex D, the initialism OPC refers to Open Packaging Conventions.

D.2 Open Packaging Conventions

D.2.1 Overview

The Open Packaging Conventions (OPC) are a container-file technology specified in ISO/IEC 29500-2. OPC-based documents are ZIP archives that contain XML, binary and other types of files. They combine the advantages of maintaining the independence and the integrity of the files embedded in the document while having a single integrated package.

An OPC package consists of parts and relationships as shown in Figure D.1. Parts refer to the content being packaged such as binary and text files. Relationships define associations between the package, parts and external resources.

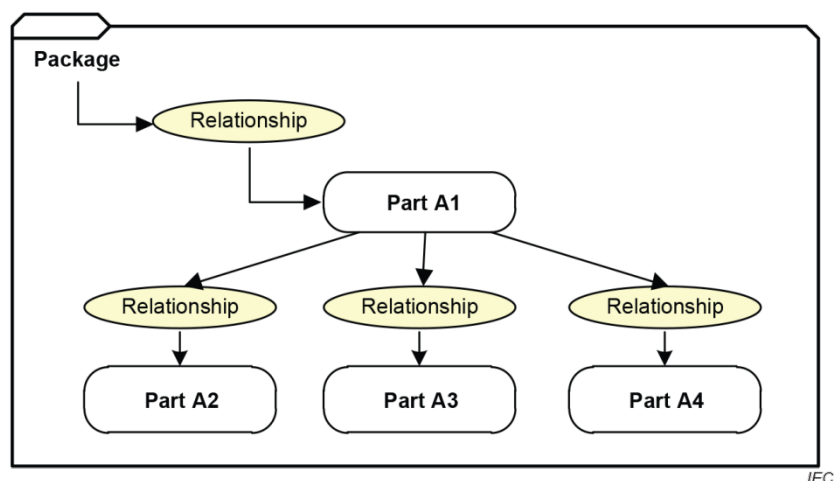


Figure D.1 – Parts and relationships in a package

D.2.2 Parts

OPC packages can store parts that contain any type of data (text, images, XML, binary, whatever). Parts can be organized as a hierarchy of folders that is similar to a file system. The OPC specification allows any folder organization that is convenient for the application.

Every part in a package has a unique URI-compliant part name along with a specified content-type expressed in the form of a MIME media type. The MIME media types for all the parts stored in the package are defined in an XML file named "[Content_Types].xml".

In an FDI Package, the parts include the Package Catalog, EDD, UIPs and Attachments.

D.2.3 Relationships

In addition to a hierarchy of folders and parts, OPC allows the definition of relationships among parts. Relationships provide a layer of indirection, so dependencies are not hardcoded into the content.

Relationships allow problem domain and application specific relationships to be defined and enforced by systems and tools. By navigating through the network of associations, one can have random access to related content.

Relationships are composed of four elements:

- an identifier (ID);
- an optional source (the package or a part within the package);
- a relationship type (a URI-style expression that defines the type of the relationship);
- a target (a URI to another part within the package or to an external resource).

The relationships are stored in XML files with the extension ".rels" within subfolders named "_rels".

In an FDI Package, the relationships are used to express the association of the package to the Package Catalog, the EDD, the UIP and the Attachments.

The following clause, for instance, defines the relationship identified as "rIdUip1", which establishes the association between the Package and the Package Catalog.

```
<Relationship Id="rIdUip1"
  Type="http://fdi-cooperation.com/2010/relationships/package-
catalog"
  Target="fdipackage/catalog.xml"/>
```

D.2.4 OPC Core Features

D.2.4.1 Overview

The content types file `/[Content_Types].xml`, the package relationships file `/_rels/.rels`, and the part relationships files in the subfolders `_rels` are the core parts of an OPC package.

The filename `[Content_Types].xml` in any folder, the subfolder name `_rels`, and the file extension `.rels` within such directory are the only three reserved names for files stored in an OPC package.

D.2.4.2 Content Types

The file `/[Content_Types].xml` defines the MIME media types for all the parts stored in the package. It defines default mappings based on file extensions, along with overrides for specific parts with content types that are different from the file extension defaults.

Table D.1 and Table D.2 show examples of standard MIME media types and examples of FDI custom MIME media types that can be used in FDI packages.

Table D.1 – Examples of standard MIME media types that can be used in FDI packages

Type of content	Standard MIME media type
XML file	application/xml
PNG image	image/png
PDF document	application/pdf
OPC relationships	application/vnd.openxmlformats-package.relationships+xml

Table D.2 – Examples of FDI custom MIME media types that can be used in FDI Packages

Type of content	FDI custom MIME media type
Package catalog	application/vnd.fdi.package.catalog+xml
EDD	application/vnd.fdi.package.edd
UIP	application/vnd.fdi.package.uip

The following clause in the `/[Content_Types].xml` file defines the default MIME media type for any XML files in the package.

```
<Default Extension="xml" ContentType="application/xml"/>
```

The following clause in the same file will override the definition above for the package catalog part only:

```
<Override PartName="/fdipackage/catalog.xml"
  ContentType="application/vnd.fdi.package.catalog+xml"/>
```

D.2.4.3 Package Relationships

The root level `/_rels` folder stores the relationships for the package as a whole. The `/_rels` folder normally contains a file named `.rels`, an XML file where the starting package-level relationships are stored.

D.2.4.4 Part Relationships

Each part may have its own relationships. If the part has relationships, they will be stored in an XML file within the `_rels` folder that is a sibling of that part. That file takes the part name with a `.rels` appended to it.

Because the Package Catalog part has relationships to other package parts, there is a file named `catalog.xml.rels` inside the `/_rels` folder that defines those relationships.

D.2.5 OPC Additional features

D.2.5.1 Core Properties

Core properties consist of package metadata. They enable users to get and set well-known and common sets of property metadata within packages, such as categorization of the content, status of package (e.g. draft, reviewed, final), date of creation, identification of the creator, keywords, and language. The core properties are not used in FDI Packages (see 5.2).

D.2.5.2 Thumbnails

Thumbnails are images that are used as graphical representation of parts of a package or a package as a whole. The use of thumbnails in an FDI Package is optional (see 5.2).

D.2.5.3 Digital Signatures

Digital signatures can be used to enable consumers to validate the integrity of the contents. The use of digital signatures is mandatory in FDI Packages (see 5.2).

D.3 Creation and Handling of FDI Packages

As long as the conventions are followed, OPC files can be created, opened and modified just as any ordinary ZIP file by using standard ZIP file tools. However, there exists higher level support to handle them so that developers do not have to cope with all the peculiarities of OPC. OPC is natively supported in Microsoft .NET Framework 3.0. Open source libraries also exist for other languages. Ultimately, FDI-specific tools are expected to provide automated support for the creation and handling of FDI Packages.

Given the catalog information, the EDD, the UIPs and attachments for a specific device type, a hypothetical FDI packaging tool is capable of creating the FDI package for that device type, as depicted in Figure D.2.

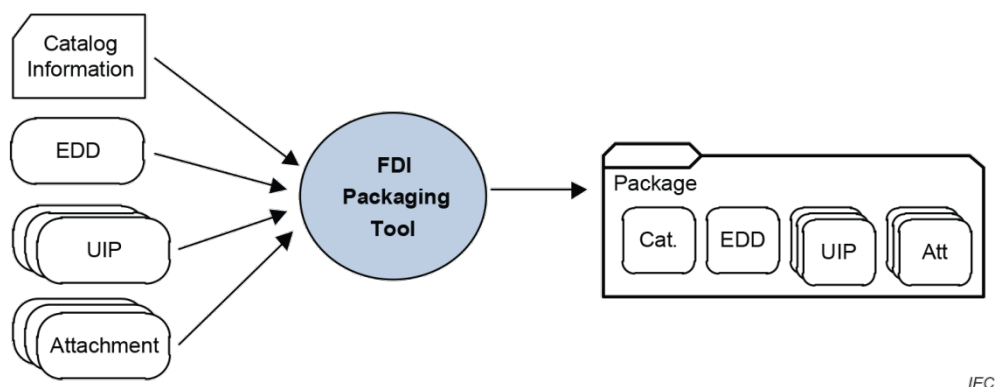


Figure D.2 – Creating an FDI Package with the content files

D.4 FDI Device Package Example

D.4.1 Overview

Figure D.3 represents an example FDI Device Package. The root directory of the FDI Device Package contains three directories and one file. The directory names fdipackage and uip are examples and are not defined by this document. The _rels directory is used to store the package relationships and is defined by ISO/IEC 29500-2.

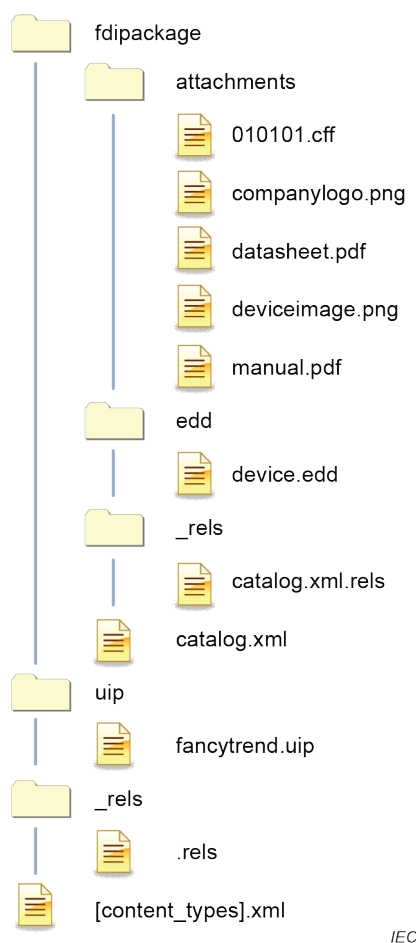


Figure D.3 – FDI Device Package Example

The file [Content_Types].xml is defined by ISO/IEC 29500-2 and defines the content type of the parts in the package. It is required for all packages. All parts in the package shall have a content type identified by this file.

An example for [/Content_Types].xml is listed below.

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<Types xmlns="http://schemas.openxmlformats.org/package/2006/content-types">
  <Default Extension="rels"
    ContentType="application/vnd.openxmlformats-package.relationships+xml"/>
  <Default Extension="xml" ContentType="application/xml"/>
  <Default Extension="uip" ContentType="application/vnd.fdi.package.uip"/>
  <Default Extension="png" ContentType="image/png"/>
  <Default Extension="pdf" ContentType="application/pdf"/>
  <Default Extension="edd" ContentType="application/vnd.fdi.package.edd"/>
  <Default Extension="cff" ContentType="application/vnd.ff.cff"/>
  <Override PartName="/fdipackage/catalog.xml"
    ContentType="application/vnd.fdi.package.catalog+xml"/>
</Types>
```

In this example, the Package Catalog is identified by the part /fdipackage/catalog.xml with content type application/vnd.fdi.package.catalog+xml in the [/Content_Types].xml. The device has a protocol-specific CFF file. It is the responsibility of the protocol organization to define the content type associated with that file type. The content type for the CFF is an example and is not currently specified by the Fieldbus Foundation.

The /rels/.rels part defines the package relationships per ISO/IEC 29500-2

An example for /rels/.rels is listed below.

```
<?xml version="1.0" encoding="UTF-8" ?>
<Relationships
  xmlns="http://schemas.openxmlformats.org/package/2006/relationships">
  <Relationship Id="rId1"
    Type="http://fdi-cooperation.com/2010/relationships/package-catalog"
    Target="fdipackage/catalog.xml"/>
  <Relationship
    Id="rIdUip1" Type="http://fdi-cooperation.com/2010/relationships/uip"
    Target="uip/fancytrend.uip"/>
</Relationships>
```

In accordance with this document, the Package Catalog shall be identified by a single package relationship. The FDI Server identifies the Package Catalog part by retrieving the part associated with this standard relationship type. In this example, the catalog relationship is represented by

```
<Relationship Id="rId1"
  Type="http://fdi-cooperation.com/2010/relationships/package-catalog"
  Target="fdipackage/catalog.xml"/>
```

The value for relationship id is not specified by this standard. ISO/IEC 29500-2 requires that each relationship have a unique relationship ID.

An FDI Device Package may also provide one or more UIPs. In accordance with this document, a UIP shall be identified by a package relationship. The FDI Server identifies a UIP in a package by searching for all parts with the associated relationship type. In this example, a single UIP is identified by

```
<Relationship Id="rIdUip1" Type="http://fdi-cooperation.com/2010/relationships/uip"
  Target="uip/fancytrend.uip"/>
```

An example for /fdicatalog/catalog.xml is listed below.

```
<?xml version="1.0" encoding="UTF-8"?>
<fdi:Catalog
  xmlns:fdi="http://fdi-cooperation.com/2010/package"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://fdi-cooperation.com/2010/package
  catalog.xsd">
  <PackageId>ef377fd0-5de5-11df-a08a-0800200c9a66</PackageId>
  <PackageType>Device</PackageType>
  <Version>1.0.0</Version>
  <FdiVersionSupported>1.0.0</FdiVersionSupported>
  <ManufacturerName>ACME Transmitters</ManufacturerName>
  <ManufacturerContact>42 Wallaby Way, Sydney,
  Australia</ManufacturerContact>
  <ManufacturerUrl>http://acme.local</ManufacturerUrl>
  <ManufacturerImage>rIdMfrLogo</ManufacturerImage>
  <ListOfDeviceTypes>
    <DeviceType>
      <Name>
        <value>Temperature Transmitter</value>
        <value xml:lang="fr">Transmetteur de température</value>
        <value xml:lang="de">Temperatur-Transmitter</value>
      </Name>
      <ClassificationId>SENSOR_TEMPERATURE</ClassificationId>
      <ListOfInterfaces>
        <Interface>
          <ListOfCommunicationProfiles>
            <CommunicationProfile>foundation_h1</CommunicationProfile>
          </ListOfCommunicationProfiles>
          <Version>5.0.0</Version>
          <Manufacturer>0xff00</Manufacturer>
```

```

        <DeviceModel>0x1234</DeviceModel>
        <CommunicationRole>CLIENT</CommunicationRole>
        <ListOfCommunicationProfileSupportFiles>

<CommunicationProfileSupportFile>rIdCFF</CommunicationProfileSupportFi
le>
        </ListOfCommunicationProfileSupportFiles>
    </Interface>
</ListOfInterfaces>
<Edd>rIDEDD</Edd>
<ListOfSupportedDeviceRevisions>
    <DeviceRevision>1.0.0</DeviceRevision>
</ListOfSupportedDeviceRevisions>
<ListOfImages>
    <Image>rIdPicture1</Image>
</ListOfImages>
<ListOfDocuments>
    <Document>rIdDocument1</Document>
    <Document>rIdDocument2</Document>
</ListOfDocuments>
<ListOfSupportedUips>
    <SupportedUip>
        <UipId>f67e4ad0-5de5-11df-a08a-0800200c9a66</UipId>
        <Name>Fancy Trend</Name>
        <Version>1.1.*</Version>
        <Optional>true</Optional>
    </SupportedUip>
</ListOfSupportedUips>
</DeviceType>
</ListOfDeviceTypes>
</fdi:Catalog>

```

The Package Catalog part will reference other package parts through relationship IDs. Those relationship IDs will be defined in a relationship file name by the part and appended with the .rels suffix. In this example, this part is named fdipackage/_rels/catalog.xml.rels.

An example for /fdipackage/_rels/catalog.xml.rels is listed below. The relationship IDs are not defined by this document. In accordance with ISO/IEC 29500-2, these relationship IDs shall be unique. The ID names in this example were selected to better illustrate referencing.

```

<?xml version="1.0" encoding="UTF-8"?>
<Relationships
xmlns="http://schemas.openxmlformats.org/package/2006/relationships">
    <Relationship Type="http://fdi-cooperation.com/2010/relationships/edd"
        Target="edd/device.edd" Id="rIdEDD"/>
    <Relationship
        Type="http://fdi-cooperation.com/2010/relationships/attachment-image"
        Target="attachments/deviceimage.png" Id="rIdPicture1"/>
    <Relationship
        Type="http://fdi-cooperation.com/2010/relationships/attachment-documentation"
        Target="attachments/datasheet.pdf" Id="rIdDocument1"/>
    <Relationship
        Type="http://fdi-cooperation.com/2010/relationships/attachment-documentation"
        Target="attachments/manual.pdf" Id="rIdDocument2"/>
    <Relationship
        Type="http://fdi-cooperation.com/2010/relationships/attachment-protocol"
        Target="attachments/010101.cff" Id="rIdCFF"/>
</Relationships>

```

In this example, the product documentation is identified by the following.

```

<ListOfDocuments>
    <Document>rIdDocument1</Document>
    <Document>rIdDocument2</Document>
</ListOfDocuments>

```

The catalog identifies the files by the relationship ids that are found in the corresponding /fdipackage/_rels/catalog.xml.rels.

```
<Relationship
  Type="http://fdi-cooperation.com/2010/relationships/attachment-documentation"
  Target="attachments/datasheet.pdf" Id="rIdDocument1"/>
<Relationship
  Type="http://fdi-cooperation.com/2010/relationships/attachment-documentation"
  Target="attachments/manual.pdf" Id="rIdDocument2"/>
```

The example FDI Device Package identifies one supported UIP.

```
<SupportedUip>
  <UipId>f67e4ad0-5de5-11df-a08a-0800200c9a66</UipId>
  <Name>Fancy Trend</Name>
  <Version>1.1.*</Version>
</SupportedUip>
```

This document permits UIPs to be delivered in the FDI Device Package, or the UIPs may be delivered in a separate FDI UIP Package. In this example, the UIP is delivered in the FDI Device Package.

UIPs are also encoded using ISO/IEC 29500-2, but they are not considered a valid FDI Package type. An FDI server will not directly consume a UIP. A UIP shall be encoded in a valid FDI Package as shown in this example.

D.4.2 User Interface Plug-in

The following example is for the UIP referenced from the example FDI Package in Clause D.4. This UIP has two variants, one targeted for the workstation and the other for a mobile environment. The UIP part is encoded according to ISO/IEC 29500-2. Figure D.4 shows the structure of the example UIP. In this example, the filename for the UIP is fancytrend.uip, and is explicitly referenced in the package relationship ID in Clause D.4.

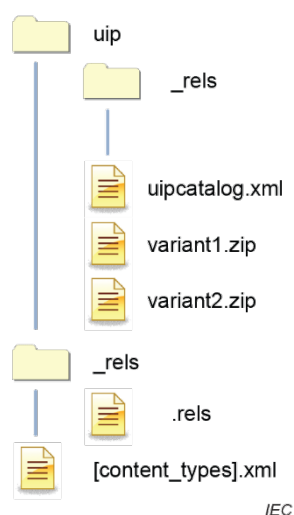


Figure D.4 – User Interface Plug-in Example (fancytrend.uip)

Similar to the example in Clause D.4, a package conforming to ISO/IEC 29500-2 shall have a /[content_types].xml and _rels/.rels part. In this example, the directory name uip is only an example and not specified by this document.