


## ISA-RP37.2-1982 (R1995)



# Guide for Specifications and Tests for Piezoelectric Acceleration Transducers for Aerospace Testing

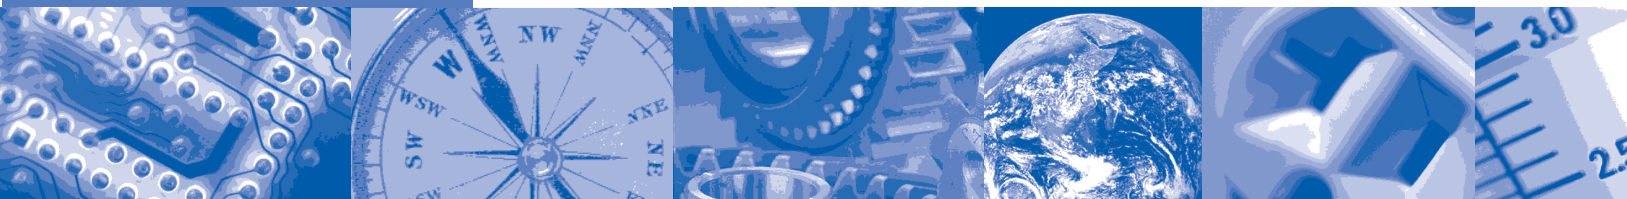

**ISA—The Instrumentation,  
Systems, and  
Automation Society**

**Reaffirmed 29 September 1995**



**Documents**  
Document Sharing Hub

ISA-RP37.2-1982 (R1995)  
Guide for Specifications and Tests for Piezoelectric Acceleration Transducers for Aerospace Testing

ISBN 0-87664-377-2

Copyright © 1982 by the Instrument Society of America. All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without the prior written permission of the publisher.

ISA  
67 Alexander Drive  
P.O. Box 12277  
Research Triangle Park, North Carolina 27709

---

## Preface

---

This preface, as well as all footnotes and annexes, is included for informational purposes and is not part of ISA-RP37.2-1982 (R1995).

This recommended practice has been prepared as a part of the service of ISA, the international society for measurement and control, toward a goal of uniformity in the field of instrumentation. To be of real value, this document should not be static, but should be subject to periodic review. Toward this end, the Society welcomes all comments and criticisms, and asks that they be addressed to the Secretary, Standards and Practices Board; ISA; 67 Alexander Drive; P.O. Box 12277; Research Triangle Park, NC 27709; Telephone (919) 549-8411; Fax: (919) 549-8288; E-mail: standards@isa.org.

The ISA Standards and Practices Department is aware of the growing need for attention to the metric system of units in general, and the International System of Units (SI) in particular, in the preparation of instrumentation standards, recommended practices, and technical reports. The Department is further aware of the benefits to USA users of ISA standards of incorporating suitable references to the SI (and the metric system) in their business and professional dealings with other countries. Toward this end, this Department will endeavor to introduce SI-acceptable metric units in all new and revised standards to the greatest extent possible. *The Metric Practice Guide*, which has been published by the Institute of Electrical and Electronics Engineers as ANSI/IEEE Std. 268-1992, and future revisions, will be the reference guide for definitions, symbols, abbreviations, and conversion factors.

**CAUTION:** The information presented within this ISA recommended practice is believed to be accurate and reflects the current state of knowledge within the field. The information is an interpretation and condensation of a larger volume of literature and experience, some of which is contradictory and speculative. Therefore, application of the information to particular situations requires the exercise of the independent professional judgment of the user. ISA is not responsible for any results from such use of the information and shall not be liable for any damages caused by such use.

It is the policy of ISA to encourage and welcome the participation of all concerned individuals and interests in the development of ISA standards, recommended practices, and technical reports. Participation in the ISA standards-making process by an individual in no way constitutes endorsement by the employer of that individual, of ISA, or of any of the standards, recommended practices, and technical reports that ISA develops.

The development of this recommended practice was initiated as a result of a survey conducted in December 1960. A total of 240 questionnaires was sent out to transducer users and manufacturers in the aerospace field. In their replies, a strong majority indicated a need for standardization of specifications and tests of several types of commonly used aerospace test transducers with electrical output.

On the basis of these replies, a Project Sub-Committee 8A-RP37.2, Guide for Piezoelectric Acceleration Transducers for Aerospace Testing, was formed under the cognizance of Committee 8A-RP37, Transducers for Aerospace Testing, of the Aerospace Standards Group, and this recommended practice was developed.

The following individuals served as members of Subcommittee 8A-RP37.2:

| NAME                    | COMPANY                           |
|-------------------------|-----------------------------------|
| T. A. Perls, Chairman   | Lockheed Missiles & Space Company |
| W. L. Vandal, Secretary | McDonnell Aircraft Corporation    |
| W. Bradley, Jr.         | Endevco Corporation               |
| S. Edelman              | National Bureau of Standards      |
| E. J. Kirchman          | NASA Goddard Space Flight Center  |
| A. W. Orlacchio         | Gulton Industries, Inc.           |

The following individuals served as members of Committee 8A-RP37 (SCOTFAST):

| NAME                     | COMPANY                           |
|--------------------------|-----------------------------------|
| H. N. Norton, Chairman   | General Dynamics/Astronautics     |
| T. A. Perls, Vice-Chm.   | Lockheed Missiles & Space Co.     |
| A. A. Zuehlke, Secretary | Bourns, Inc.                      |
| R. M. Bernstein          | Marketing Engineering Company     |
| M. E. Binkley            | Lockheed Missiles & Space Company |
| D. G. Egan               | General Dynamics/Fort Worth       |
| R. G. Jewell             | General Electric Company          |
| P. S. Lederer            | National Bureau of Standards      |
| O. L. Smith              | Marshall Space Flight Center      |
| F. K. Wemer              | Rosemount Engineering Company     |

The following individuals served on the ISA Committee SP37, who reaffirmed ISA-RP37.2 in 1995:

| NAME               | COMPANY                       |
|--------------------|-------------------------------|
| E. Icyan, Chairman | Westinghouse Hanford Co.      |
| J. Weiss           | Electric Power Research Inst. |
| P. Bliss, Deceased | Consultant                    |
| M. Brigham         | The Supply System             |
| D. Hayes           | LA Dept. Water & Power        |
| M. Kopp            | Validyne Corp.                |
| C. Landis          | Weed Fiber Optics             |
| J. Miller          | Rosemount Inc.                |
| A. Mobley          | 3M Co.                        |
| J. Mock            | Consultant                    |
| D. Norton          | McDermott Energy Svces Inc.   |
| H. Norton          | Consultant                    |
| M. Tavares         | Boeing Defense & Space Group  |
| R. Whittier        | Endevco                       |
| J. Wilson          | Consultant                    |

This recommended practice was reaffirmed by the ISA Standards and Practices Board on September 29, 1995.

## NAME

## COMPANY

|                             |                                              |
|-----------------------------|----------------------------------------------|
| M. Widmeyer, Vice President | Washington Public Power Supply System        |
| H. Baumann                  | H. D. Baumann & Associates, Inc.             |
| D. Bishop                   | Chevron USA Production Company               |
| P. Brett                    | Honeywell, Inc.                              |
| W. Calder III               | Foxboro Company                              |
| H. Dammeyer                 | Phoenix Industries, Inc.                     |
| R. Dieck                    | Pratt & Whitney                              |
| H. Hopkins                  | Utility Products of Arizona                  |
| A. Iverson                  | Lyondell Petrochemical Company               |
| K. Lindner                  | Endress + Hauser GmbH + Company              |
| T. McAvinew                 | Metro Wastewater Reclamation District        |
| A. McCauley, Jr.            | Chagrin Valley Controls, Inc.                |
| G. McFarland                | Honeywell Industrial Automation and Controls |
| J. Mock                     | Consultant                                   |
| E. Montgomery               | Fluor Daniel, Inc.                           |
| D. Rapley                   | Rapley Engineering Services                  |
| R. Reimer                   | Allen-Bradley Company                        |
| R. Webb                     | Pacific Gas & Electric Company               |
| W. Weidman                  | Consultant                                   |
| J. Weiss                    | Electric Power Research Institute            |
| J. Whetstone                | National Institute of Standards & Technology |
| C. Williams                 | Eastman Kodak Company                        |
| G. Wood                     | Graeme Wood Consulting                       |
| M. Zielinski                | Fisher•Rosemount                             |

Downloaded from https://www.industrydocuments.ucsf.edu/docs/isa-rp37.2 on 03/21/2009 02:03:36 MDT

---

# Contents

---

|                                                                                                     |           |
|-----------------------------------------------------------------------------------------------------|-----------|
| <b>1 Scope</b>                                                                                      | <b>9</b>  |
| <b>2 Purpose</b>                                                                                    | <b>9</b>  |
| <b>3 Drawing symbol</b>                                                                             | <b>9</b>  |
| 3.1 General                                                                                         | 9         |
| 3.2 Self-checking accelerometers                                                                    | 10        |
| <b>4 Characteristics</b>                                                                            | <b>11</b> |
| 4.1 Design characteristics                                                                          | 12        |
| 4.2 Performance characteristics                                                                     | 13        |
| 4.3 Additional terminology                                                                          | 14        |
| <b>5 Individual acceptance tests and calibration</b>                                                | <b>16</b> |
| 5.1 Visual inspection                                                                               | 16        |
| 5.2 Initial functional tests                                                                        | 16        |
| 5.3 Tests and measurements                                                                          | 18        |
| 5.4 Final functional tests                                                                          | 19        |
| <b>6 Qualification tests</b>                                                                        | <b>20</b> |
| 6.1 Effectiveness of mounting technique                                                             | 20        |
| 6.2 Temperature range                                                                               | 21        |
| 6.3 Mounted resonant frequency                                                                      | 21        |
| 6.4 Frequency response, maximum range (see 5.2.1 and 5.2.2.)                                        | 22        |
| 6.5 Amplitude linearity                                                                             | 22        |
| 6.6 Strain sensitivity                                                                              | 23 & 28   |
| 6.7 Temperature sensitivity error                                                                   | 23 & 28   |
| 6.8 Transient temperature error                                                                     | 23 & 28   |
| 6.9 Acoustic sensitivity                                                                            | 23 & 28   |
| 6.10 Electromagnetic response                                                                       | 24 & 28   |
| 6.11 Transducer seal immersion test (Use on all moisture sealed or hermetically sealed transducers) | 24 & 29   |
| 6.12 Other environmental effects                                                                    | 24 & 29   |
| 6.13 Sensitivity stability                                                                          | 24 & 29   |
| <b>Annex A — References</b>                                                                         | <b>31</b> |

Copyright The Instrumentation, Systems, and Automation Society



---

## 1 Scope

---

**1.1** This recommended practice covers piezoelectric acceleration transducers, primarily those used in aerospace test instrumentation.

**1.2** Terminology used in this document follows ISA-S37.1, *Nomenclature and Specification Terminology for Aerospace Test Transducers with Electrical Output*, except that additional terms considered applicable to piezoelectric vibration transducers are defined in 4.3.

---

## 2 Purpose

---

This recommended practice establishes the following for piezoelectric acceleration transducers:

**2.1** Uniform minimum general specifications for design and performance characteristics.

**2.2** Uniform minimum acceptance and qualification test methods, including calibration.

**2.3** Uniform presentation of minimum test data.


**2.4** A drawing symbol for use in schematics.

---

## 3 Drawing symbol


---

### 3.1 General

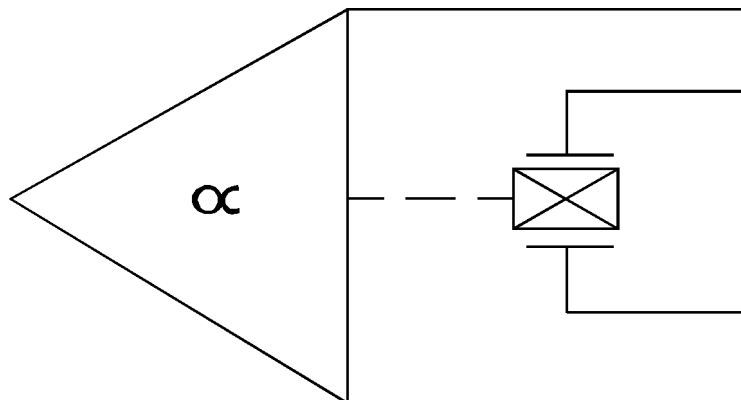


## 3.2 Self-checking accelerometers

### 3.2.1 Active

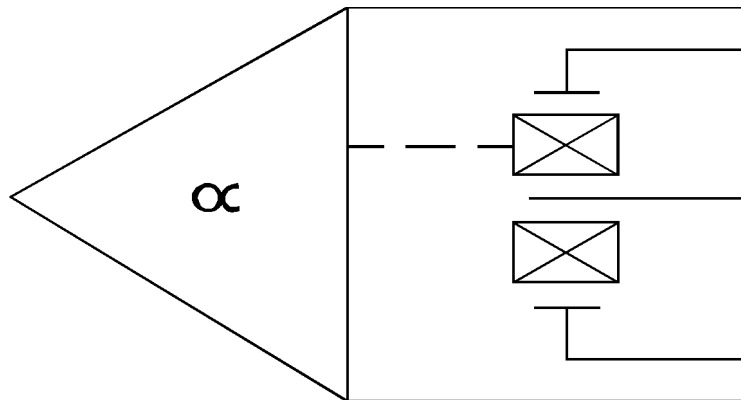

### 3.2.2 Passive

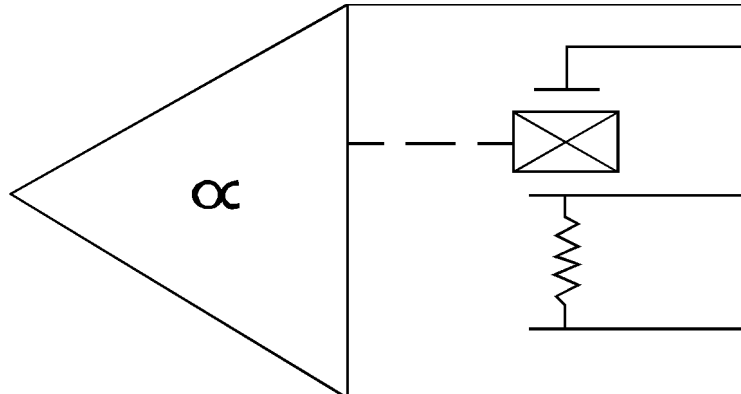

---

## 4 Characteristics

---

The first two paragraphs contain, in alphabetical order, the terms to be used in manufacturers' and users' specifications for piezoelectric acceleration transducers. Some terms not already defined in ISA-S37.1 (*Nomenclature and Specification Terminology for Aerospace Test Transducers with Electrical Output*) are marked with an asterisk (\*) and are defined in 4.3.

In 4.1 and 4.2, each characteristic listed is checked (or numbered with reference to [Sections 5 or 6](#)) in one or several columns to indicate the characteristics which are included in manufacturers' literature or users' specifications as follows:

- a) Basic — indicates characteristics which are normally specified for each transducer.
- b) Supplemental — indicates additional characteristics which may be specified if desired.

The remaining three columns indicate the tests required to determine these characteristics.

- a) Individual Acceptance Tests (IAT) — tests performed on each transducer.
  - 1) Within Stated Tolerances - these tests are of the "go - no go" type with respect to stated tolerances.
  - 2) Measured Value - these tests provide individual measured values of the characteristic.
- b) Qualification tests — tests in addition to the IAT's performed on representative samples of each transducer design. All IAT's are, of course, performed during a formal qualification test program.

Some of the **basic** and **supplemental** characteristics are determined by the manufacturer's research and development and require no additional testing.