



**INTERNATIONAL STANDARD ISO/IEC 14496-20:2006**  
**TECHNICAL CORRIGENDUM 1**

Published 2007-02-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION  
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

**Information technology — Coding of audio-visual objects —**  
**Part 20:**  
**Lightweight Application Scene Representation (LAsER) and**  
**Simple Aggregation Format (SAF)**

**TECHNICAL CORRIGENDUM 1**

*Technologies de l'information — Codage des objets audiovisuels —*

*Partie 20: Représentation de scène d'application allégée (LAsER) et format d'agrégation simple (SAF)*

*RECTIFICATIF TECHNIQUE 1*

Technical Corrigendum 1 to ISO/IEC 14496-20:2006 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

*In subclause 6.2.2 "Fonts", replace the first paragraph with:*

LASeR supports the encoding of fonts. Fonts may be encoded separately from the scene using ISO/IEC 14496-18, and sent as a media stream together with the scene stream. Fonts may also be transmitted using SVG elements related to font encoded using the `privateAnyXMLElement` SDL construct, as specified in 12.2.1 and 12.2.3.

*In subclause 6.3 "Timing Model", replace the first paragraph with the following:*

This subclause describes the notion of Scene Times, Media Times, and Encoded Scene Times.

*In subclause 6.3, replace the following paragraph:*

Scene times within that access unit ("begin" in this example) are encoded for transmission relative to the scenetime of the access unit. In this example, the "begin" time X is transmitted as the Encoded Scene Time X-ST(r). For LASeR commands inside a script element, ST(r) is the scene time when the script is activated.

*with:*

For LASeR commands inside a conditional element, ST(r) is the scene time when the conditional is activated.

*In the last paragraph of subclause 6.3, replace sentence:*

The number of ticks per seconds for time values relating to the scene time line is defined by the timeResolution attribute of the LASeRHeader.

*with:*

The number of ticks per seconds and origin of time values relating to the scene time line are defined by the timeResolution and timeEncoding attributes of the LASeRHeader.

*In the last paragraph of subclause 6.3, remove sentence:*

Attributes "begin" and "end" are encoded as offset from the scene time of the current access unit.

*In subclause 6.5 "Supported Events", replace in Table 1:*

|          |                           |                                                                                                   |    |    |
|----------|---------------------------|---------------------------------------------------------------------------------------------------|----|----|
| "pause"  | urn:mpeg:mpeg4:laser:2005 | Freezes the clock of the timed object they are sent to, and have no effect on non timed objects.  | No | No |
| "resume" | urn:mpeg:mpeg4:laser:2005 | Restarts the clock of the timed object they are sent to, and have no effect on non timed objects. | No | No |

*with:*

|         |                           |                                                                                                                                                                                                                                                                           |    |    |
|---------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|
| "pause" | urn:mpeg:mpeg4:laser:2005 | Freezes the clock of the target timed element, and have no effect on non timed elements.                                                                                                                                                                                  | No | No |
| "play"  | urn:mpeg:mpeg4:laser:2005 | If the target timed element is not active, receiving this event starts the timed element as if it received an activate event. If the timed element has been paused, receiving this event resumes the clock of the timed element. It have no effect on non timed elements. | No | No |

*In subclause 6.5, add to Table 1:*

|                 |                           |                                                                                                                                                                                          |    |    |
|-----------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|
| "executionTime" | urn:mpeg:mpeg4:laser:2005 | This pseudo event can only appear in time expressions in Replace Attribute and Insert Indexed Attribute commands; upon the execution of the command, it is replaced by the current time. | No | No |
|-----------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----|

*In subclause 6.5, remove Table 2 and the associated introductory sentence.*

*In subclause 6.6.2.1 "LASeR headers semantics", replace the following:*

LASeR defines a way to partition scenes into incremental scene segments, allowing services to be built of different scene segments, the first scene segment containing a NewScene update, the other scene segments having the **append** bit set and not starting with a **NewScene** update, and being designed as addition to the first scene segment.

LASeR defines an interface to persistent storage. The LASeR engine shall cache permanent streams and selected scene information on a best effort basis. The principles behind this caching closely follow the state caching mechanism in HTTP, commonly called cookies [RFC 2965]. Within the LASeR streams, there are two commands that may be used. One command saves, associated with a string name called **groupID**, the values of some attributes of some nodes. This storage is scoped by the domain-name and path computed from the source using the fields in the LASeR header. The other command restores the attributes (if any) previously saved under the given **groupID**, as scoped by the domain-name and path.

The stored values and permanent streams are scoped by the domain-name and path. That is, it is possible for both ".acme.com" and ".widget.com" to store data under the same **groupID** and for that storage to be distinct; similarly for "/user/laser-expert/" and "/user/laser-novice/" at ".acme.com" to save state under the same **groupID**, and for those saved states to be distinct.

*with:*

LASeR defines a way to partition scenes into incremental scene segments, allowing services to be built of different scene segments, the first scene segment containing a NewScene update, having the **newSceneIndicator** bit set, and the other scene segments not starting with a **NewScene** update, and being designed as addition to the first scene segment.

LASeR defines an interface to persistent storage. The LASeR engine has the ability to cache selected scene information, using specific LASeR commands, on a best effort basis. The principles behind this caching closely follow the state caching mechanism in HTTP, commonly called cookies [RFC 2695]. Within the LASeR streams, there are two commands that may be used. One command saves, associated with a string name called **groupID**, the values of some attributes of some nodes. This storage is scoped by the domain-name and path computed from the source using the fields in the LASeR header. The other command restores the attributes (if any) previously saved under the given **groupID**, as scoped by the domain-name and path.

The stored values are scoped by the domain-name and path. That is, it is possible for both ".acme.com" and ".widget.com" to store data under the same **groupID** and for that storage to be distinct; similarly for "/user/laser-expert/" and "/user/laser-novice/" at ".acme.com" to save state under the same **groupID**, and for those saved states to be distinct.

*In subclause 6.6.2.2 "Attributes of LASeR Header", do the following edits:*

- Remove Table 3

- Remove the bullet defining "append"

- Remove the bullet defining "hasStringIDs"

- Add the following 2 bullets:

- **newSceneIndicator**: this Boolean indicates if this scene segment starts with a NewScene command or a RefreshScene command. When it is set, the first LASeR command in this scene segment shall be a NewScene or a RefreshScene; otherwise, the first LASeR command in this scene segment shall be neither a NewScene nor a RefreshScene.

NOTE : the terminal may remove (parts of) the existing scene tree, for resource optimization, when it receives a LASeRHeader with this Boolean set to true.

- **timeEncoding**: this attribute defines the reference for encoded times: if the value is 0, all times in this segment are relative to the scene time line; if the value is 1, all times in this segment are relative to the beginning of this segment; if the value is 2, all times are encoded in the same way as in the previous segment.

*In subclause 6.6.2.4 "Encoding Context", add the following sentence:*

Binary IDs shall not be referred to across scene segments.

Create subclause 6.6.3 "String IDs Encoding":

### 6.6.3 String IDs Encoding

The element StringIDTable is an optional first child of the LAsERUnit in LAsERML. This StringID table informs the encoder to encode the given IDs as a string ID. When hasStringIDs is set, this table can be omitted as all IDs shall be encoded as strings.

```
<StringIDTable strings="<oneString> <oneString> ..."/>
```

An ID that must be encoded as a string ID must be declared at the latest in the StringIDTable of the LAsERUnit where it is first used (by definition or by reference). When a LAsER AccessUnit is a random access point (RAP), it shall contain a table containing all already known string IDs.

In subclause 6.7.1 "LAsER Scene Commands Overview", replace the second bullet of the second paragraph with the following:

The following attributes cannot be updated: attributeName, id, type, xml:space, preserveAspectRatio, the x and y attributes of the text element and the following attributes of the animation elements: by, from, to, values and fill. This constraint can be worked around by updating the whole element.

Append the following at the end of subclause 6.7.1:

LAsER Commands modify a scene tree regardless of their representation, transport or encoding and regardless of the origin of the scene tree on which they apply. Commands and initial scene may be represented separately in different documents, encoded and delivered in different streams.

In subclause 6.7.2.1 "Add attributes semantics", add the following paragraph at the end of the subclause:

The value designated by **operandElementId** and **operandAttributeName** is the presentation value. The following attributes cannot be added to: **children**, **d**, **mpath**, **begin**, **end**.

In subclause 6.7.4.2 "Delete Attributes", replace:

- **attributeName**: this attribute defines the name of the attribute in which the deletion happens, by default "children". This attribute is only allowed in conjunction with index.

with:

- **attributeName**: when index is specified, this attribute defines the name of the attribute in which the deletion happens, by default "children". When index is not specified, the whole attribute is removed.

In subclause 6.7.5.1 "Insert Semantics", replace:

The **Insert** command inserts an element in a parent list.

with:

The **Insert** command inserts an element or value in a list.

In the examples, replace "Insert href" with "Insert ref" three times.

In subclause 6.7.5.2 "Insert attributes", add the following sentence at the end of the second bullet:

In the case of indexed inserts to the begin/end attributes of all timed elements, the index is ignored, which means the insertion will be done at the end of the list. Indexed inserts to the attributes of type path, namely d and mpath, are not allowed.

In subclause 6.7.8.1 "Replace Semantics", replace the third paragraph with the following:

The **Attribute Replacement** command replaces a specific attribute of an element with a new value. The **ref** attribute specifies the parent element, the **attributeName** attribute specifies which attribute of the parent

element is replaced, and the **value** attribute or the content of the Replace element specifies the new value. If **index** is specified, then the replacement is done on the value with rank **index** in the list.

When replacing begin and end attributes, the pseudo-event executionTime can be used to signify the time at which the command is executed. After execution, this pseudo-event is replaced by its time value.

*Insert the following two paragraphs at the end of subclause 6.7.8.1:*

The following restrictions apply:

- attributeName may point at a private XML attribute, in which case index is not allowed.
- Indexed replacements to the begin/end attributes of all timed elements are not allowed.
- Indexed replacements to the attributes of type path, namely **d** and **mpath**, are not allowed.
- The values **id**, **begin**, **end**, **d** and **mpath** are not allowed for operandAttributeName.

The value designated by **operandElementId** and **operandAttributeName** is the presentation value as defined in the SVG specification.

Attribute replacement with attributeName="textContent" and a value of index replaces the index-th component of the text content of the target element, if it exists. Without an index value, the text content is flattened and replaced as a whole, as in text editing. In the absence of text content, this command is ignored.

*In subclause 6.7.8.2 "Replace Attributes", replace the semantics of the attributeName attribute with the following:*

- **attributeName**: this attribute defines the name of the replaced attribute. Acceptable values are the name of any attribute of a LAsER element or the name of any private XML attribute used in the scene.

*In subclause 6.7.10.2 "Save Command Attributes", in the semantics of the attribute field, add the following sentence.*

The following attributes are not allowed in the **attributes** list: **children**, **begin**, **end**.

*In subclause 6.7.11.2 "SendEvent Command Attributes", add at the end:*

The above attributes carry information from the interface of the events, as specified in the next table:

| Name of event | Attribute of event | Attribute of SendEvent                                                            |
|---------------|--------------------|-----------------------------------------------------------------------------------|
| TimeEvent     | detail             | intvalue                                                                          |
| UIEvent       | detail             | intvalue                                                                          |
| WheelEvent    | wheelDelta         | intvalue                                                                          |
| MouseEvent    | screenX            | not carried                                                                       |
|               | screenY            | not carried                                                                       |
|               | clientX            | pointvalue                                                                        |
|               | clientY            | pointvalue                                                                        |
|               | button             | intvalue                                                                          |
| TextEvent     | data               | stringvalue                                                                       |
| KeyEvent      | keyIdentifier      | stringvalue when unknown keyIdentifier, intvalue when a LAsER key code is defined |
| ProgressEvent | lengthComputable   | not carried                                                                       |
|               | loaded             | intvalue                                                                          |
|               | total              | not carried                                                                       |

*In subclause 6.8.1 "Conventions", remove duplicated sentence:*

The list of possible attributes for an element is given in the summary table in subclause 6.8.41 and fix reference.

*In subclause 6.8.3 SVG a, add paragraphs at the end:*

The expression "linked content" is used in the definition of the target attribute in [W3C SVG11]. For LAsER content, if the incoming data starts with a NewScene, "linked content" is the scene described by the incoming data; if the incoming data starts with any other command than a NewScene or RefreshScene, "linked content" is the current scene modified by the commands contained in the incoming data.

When an a element is activated, the incoming data replaces the previously incoming LAsER Commands and media.

*In subclause 6.8.4.2 "SVG animate Attributes", in the semantics of the enabled attribute, add the following sentence:*

The default value for this attribute is 'true'.

*In subclause 6.8.5.2 "SVG animateColor Attributes", in the semantics of the enabled attribute, add the following sentence:*

The default value for this attribute is 'true'.

*In subclause 6.8.6.2 "SVG animateMotion Attributes", in the semantics of the enabled attribute, add the following sentence:*

The default value for this attribute is 'true'.

*In subclause 6.8.7.2 "SVG animateTransform Attributes", in the semantics of the enabled attribute, add the following sentence:*

The default value for this attribute is 'true'.

*In subclause 6.8.8.2 "SVG audio Attributes", add this sentence to bullet about clipBegin:*

The value of clipBegin is taken into account when the media element is activated.

*Add this sentence to bullet about clipEnd:*

The value of clipEnd is taken into account when the media element is activated.

*Insert a new subclause between 6.8.9 and 6.8.10:*

## **6.8.10 LAsER conditional**

### **6.8.10.1 Semantics**

The **LAsER conditional** element allows sets of scene commands to be inserted in the scene, for later execution upon activation by time or through the **XML Events listener** element.

### **6.8.10.2 Attributes**

- **begin**: this attribute specifies the time at which the conditional element is triggered. This attribute is not animatable and not inheritable. The default value is indefinite.
- **enabled**: this Boolean attribute specifies whether the element is activatable or not. This attribute is not animatable and not inheritable. The default value is true.

Replace subclause 6.8.10 "SVG Cursor" with the following:

## 6.8.11 LAsER cursorManager

### 6.8.11.1 Semantics

The LAsER cursorManager element may point to any LAsER element to confer it the semantics of virtual pointer. The virtual pointer may be moved through LAsER Commands or other interaction by moving the object associated with the virtual pointer. When moved in and out of mouse-sensitive elements, the same events shall be generated as if a pointing device such as a mouse had been moved in its stead. For example:

- when the virtual pointer is moved in a mouse-sensitive region, a mouseover is generated,
- when the virtual pointer is moved out of a mouse-sensitive region, a mouseout is generated,
- when the virtual pointer is moved, a mousemove is generated,
- when the virtual pointer is located on a mouse-sensitive region and a activate event is received by the virtual pointer, the activate event is translated to a click event sent to the region.

LAsER elements implementing the interaction moving the object associated with the virtual pointer shall be placed as children of the cursor element.

Example:

```
<lsr:cursorManager id="cursorManager1" xlink:href="#vp">
  <!-- pointer movement -->
  <ev:listener event="accessKey(UP)" handler="#s1"/>
  <lsr:conditional id="s1">
    <lsr:Add ref="g" attribute="translation" pointvalue="0 -5"/>
  </lsr:conditional>
  <ev:listener event="accessKey(DOWN)" handler="#s2"/>
  <lsr:conditional id="s2">
    <lsr:Add ref="g" attribute="translation" pointvalue="0 5"/>
  </lsr:conditional>
  <ev:listener event="accessKey(LEFT)" handler="#s3"/>
  <lsr:conditional id="s3">
    <lsr:Add ref="g" attribute="translation" pointvalue="-5 0"/>
  </lsr:conditional>
  <ev:listener event="accessKey(RIGHT)" handler="#s4"/>
  <lsr:conditional id="s4">
    <lsr:Add ref="g" attribute="translation" pointvalue="5 0"/>
  </lsr:conditional>
</lsr:cursorManager>
<!-- activate event to be translated to a click -->
<ev:listener event="accessKey(FIRE)" handler="#cursorManager1"/>
<!-- mouse sensitive shape -->
<polygon ...>
  <ev:listener event="click" handler="#someConditional"/>
</polygon>
<g id="vp" fill="black">
  <!-- crosshair -->
  <line x1="-5" y1="0" x2="5" y2="0"/>
  <line x1="0" y1="-5" x2="0" y2="5"/>
</g>
```

### 6.8.11.2 Attributes

Attributes of lsr:cursorManager are x, y and xlink:href as defined on the cursor element of SVG 1.1 [W3C SVG11]

Replace subclause 6.8.15 "SVG g element" with the following:

The **SVG g** element is described in subclause 5.2 of [W3C SVG11].

And create the following subclauses:

## 6.8.28 LAsER rectClip

### 6.8.28.1 Semantics

The **LAsER rectClip** element acts as a clipping element, limiting the rendering of its children to a device-pixel-aligned rectangle, in addition to the semantics of the **SVG g** element. The rectangle is not sensitive to rotation or skew of the local coordinate system, and if scaled, its size is rounded to the nearest pixel. If the rectClip element carries a transform attribute, the corresponding transformation is applied to the rectClip children but not to the clipping rectangle itself.

### 6.8.28.2 Attributes

- **size**: a pair of coordinates defining the width and height of the clipping rectangle. All children are clipped by this axis-aligned rectangle centered on the origin of the local coordinate system and of size (size.x, size.y). This attribute is animatable but not inheritable.

## 6.8.30 LAsER selector

### 6.8.30.1 Semantics

The **LAsER selector** element acts as a selection element, rendering zero or one of its children, in addition to the semantics of the **SVG g** element.

### 6.8.30.2 Attributes

- **choice**: the rendering mode selector. It is either one of the value 'none' or 'all' or an integer representing the 0-based index of the child to be displayed. This attribute is animatable but not inheritable.

## 6.8.32 LAsER simpleLayout

### 6.8.32.1 Semantics

The **LAsER simpleLayout** element acts as a simple layout tool, by spacing its children by a specified amount, thus creating rows or columns of children, in addition to the semantics of the **SVG g** element.

### 6.8.32.2 Attributes

- **delta**: a pair of coordinates defining the spacing between children. The first child is displayed at (0,0) of the local coordinate system, and the n-th child is displayed at ((n-1)\*size.x,(n-1)\*size.y) of the local coordinate system. One of the two coordinates shall be 0. This creates a row or column of objects. This attribute is animatable but not inheritable.

**NOTE** If a child is hidden, the effect will be that a gap is visible between the previous and following child.

In subclause 6.8.19.2 "XML Events listener Attributes", do the following edits:

- in the semantics of the *enabled* attribute, add the following sentence.

The default value for this attribute is 'true'.

- remove the semantics of *timeAttribute* and *delay*.

- replace the semantics of the *handler* attribute with the following:

- **handler**: as specified in XML Events Specification with the restrictions that supported handlers depend on the event. If the handler attribute is not present, the default handler is the parent of the listener element.

The following table summarizes LAsER specific handlers and their associated default action:

| Event    | Handler                            | Default Action                                  |
|----------|------------------------------------|-------------------------------------------------|
| activate | a                                  | follow the hyperlink                            |
| activate | conditional                        | executes the conditional content                |
| pause    | any element with timing attributes | freezes the time line of this element           |
| play     | any element with timing attributes | starts or resumes the time line of this element |

The following table summarizes SVG specific handlers and their associated default action, as defined in the SVG specification:

| Event    | Handler                            | Default Action        |
|----------|------------------------------------|-----------------------|
| activate | any editable element               | starts the editing    |
| activate | any element with timing attributes | activates the element |

For other couple (event, handler) not defined in this specification, the default action is undefined.

*Replace subclause 6.8.27 "SVG script" with the following:*

The **SVG script** element is specified in subclause 18.2 of [W3C SVG11].

*Replace subclause 6.8.32 "SVG text" with the following:*

## 6.8.36 SVG text

### 6.8.36.1 Semantics

The **SVG text** element is defined in subclause 10.4 of [W3C SVG11], with the **SVG text-decoration** attribute from subclause 10.12 of [W3C SVG11].

### 6.8.36.2 Attributes

- Additional values for the text-decoration attributes are defined, taken from [4]: "LAsER\_OUTLINE", "LAsER\_EMBOSS", "LAsER\_ENGRAVE", "LAsER\_LEFTDROPSHADOW", "LAsER\_RIGHTDROPSHADOW".

NOTE Authors who want their content to degrade gracefully on pure SVG client should make sure that either: the default value for text-decoration is appropriate or that the requiredExtensions attribute is used.

- SVG font-size: the size of the font represents the height value of the EM-box of a font in the local coordinate system.
- SVG editable: If set to "false" (default) the contents of the text element are not editable in place through the browser. If set to "true", the browser must provide a way for the user to edit the content of the text element and all contained subelements which are not hidden (with visibility="hidden") or disabled (through the switch element or display="none").
- SVG display-align: this attribute is defined in subclause 10.11.5 of [2], i.e. it governs alignment in the direction orthogonal to the main direction of the text.

*In subclause 6.8.36.2 "SMIL video Attributes", add this sentence to bullet about clipBegin:*

The value of clipBegin is taken into account when the media element is activated.

*In subclause 6.8.36.2, add this sentence to bullet about clipEnd:*

The value of clipEnd is taken into account when the media element is activated.

In subclause 6.8.36.2, replace the paragraph concerning the semantic of the overlay attribute with the following:

**Isr:fullscreen:** This attribute can take the values true and false (the default). When set, the video shall be rendered alone and should fill the full screen area. This means no other visual element in the scene shall be rendered and in every other respect, the processing is as normal, e.g. events must still be dispatched to the appropriate elements and audio elements are rendered. The preserveAspectRatio attribute should be respected. If the preserveAspectRatio attribute indicates uniform scaling, then uniform scaling shall be applied. The viewport-fill-opacity attribute should be ignored. The fullscreen attribute is not animatable and not inheritable. This attribute shall not be set on more than one video element at any time in a scene.

Note: The full screen area is the largest part of the whole screen that can be used. The presence of this attribute indicates that the content author wishes to have the video presented as large as possible, and with as few as possible other visual elements (e.g. from other applications or from the OS) on the screen. If the video does not fill the rendering area, the viewport fill color is suggested but not required for the unpainted areas.

In subclause 6.8.37 “Summary of possible attributes per element”, change title of this subclause from “Summary of possible children and attributes per element” to “Summary of possible attributes per element” and renumber to 6.8.41

Replace Table 7 with:

| Element name     | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a                | audio-level color color-rendering display display-align externalResourcesRequired fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight image-rendering line-increment Isr:rotation Isr:scale Isr:translation pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage target text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type |
| animate          | accumulate additive attributeName begin by calcMode class dur enabled end fill from id keySplines keyTimes max min repeatCount repeatDur restart to values xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| animateColor     | accumulate additive attributeName begin by calcMode class dur enabled end fill from id keySplines keyTimes max min repeatCount repeatDur restart to values xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| animateMotion    | accumulate additive attributeName begin by calcMode class dur enabled end fill from id keyPoints keySplines keyTimes max min path repeatCount repeatDur restart rotate to values xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| animateTransform | accumulate additive attributeName begin by calcMode class dur enabled end fill from id keySplines keyTimes max min repeatCount repeatDur restart to type values xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| audio            | audio-level begin class dur end externalResourcesRequired id Isr:syncReference repeatCount repeatDur requiredExtensions requiredFeatures requiredFormats syncBehavior syncTolerance systemLanguage type xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| circle           | audio-level class color color-rendering cx cy display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-weight font-variant id image-rendering line-increment Isr:rotation Isr:scale Isr:translation pointer-events r requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                         |


| Element name      | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| lsr:conditional   | id class style begin enabled externalResourcesRequired xlink:href xlink:title xlink:type xlink:role xlink:arcrole xlink:actuate xlink:show xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| lsr:cursorManager | id class style xml:base xml:lang xml:space xlink:href xlink:title xlink:type xlink:role xlink:arcrole xlink:actuate xlink:show x y                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| defs              | audio-level class color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style font-variant font-weight id image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                       |
| desc              | class id xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| ellipse           | audio-level class color color-rendering cx cy display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events requiredExtensions requiredFeatures requiredFormats rx ry shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                  |
| foreignObject     | audio-level class color color-rendering display display-align externalResourcesRequired fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight height id image-rendering line-increment pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility width x xml:base xml:lang xml:space y                                                                                    |
| g                 | id class style xml:base xml:lang xml:space audio-level color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style text-decoration font-weight font-variant image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering viewport-fill viewport-fill-opacity vector-effect visibility lsr:rotation lsr:scale lsr:translation transform requiredFeatures requiredExtensions systemLanguage requiredFormats requiredFonts nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable focusHighlight externalResourcesRequired |
| image             | class display externalResourcesRequired nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable height id lsr:rotation lsr:scale lsr:translation opacity pointer-events requiredExtensions requiredFeatures requiredFormats systemLanguage transform transformBehavior type visibility width x xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space y type preserveAspectRatio viewport-fill viewport-fill-opacity                                                                                                                                                                                                                                                                                              |
| line              | audio-level class color color-rendering display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility x1 x2 xml:base xml:lang xml:space y1 y2                                                                  |


| Element name   | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| linearGradient | audio-level class color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style font-variant font-weight gradient-units id image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility x1 x2 xml:base xml:lang xml:space y1 y2                                                                                                                                                                                                                                      |
| ev:listener    | id enabled event handler observer phase propagate defaultAction target                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| metadata       | class id xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| mpath          | class id xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| path           | audio-level class color color-rendering d display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pathLength pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space           |
| polygon        | audio-level class color color-rendering display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events points requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                 |
| polyline       | audio-level class color color-rendering display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events points requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                 |
| radialGradient | audio-level class color color-rendering cx cy display display-align fill fill-opacity fill-rule font-family font-size font-style font-variant font-weight gradient-units id image-rendering line-increment pointer-events r shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                                                                                                                                                                                          |
| rect           | audio-level class color color-rendering display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight height id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events requiredExtensions requiredFeatures requiredFormats rx ry shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility width x xml:base xml:lang xml:space y |

| Element name     | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| lsr:rectClip     | id class style xml:base xml:lang xml:space audio-level color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style text-decoration font-weight font-variant image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering viewport-fill viewport-fill-opacity vector-effect visibility lsr:rotation lsr:scale lsr:translation transform requiredFeatures requiredExtensions systemLanguage requiredFormats requiredFonts nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable focusHighlight externalResourcesRequired size   |
| script           | begin class enabled externalResourcesRequired id type xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| lsr:selector     | id class style xml:base xml:lang xml:space audio-level color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style text-decoration font-weight font-variant image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering viewport-fill viewport-fill-opacity vector-effect visibility lsr:rotation lsr:scale lsr:translation transform requiredFeatures requiredExtensions systemLanguage requiredFormats requiredFonts nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable focusHighlight externalResourcesRequired choice |
| set              | attributeName begin class dur enabled end fill id max min repeatCount repeatDur restart to xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| lsr:simpleLayout | id class style xml:base xml:lang xml:space audio-level color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style text-decoration font-weight font-variant image-rendering line-increment pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering viewport-fill viewport-fill-opacity vector-effect visibility lsr:rotation lsr:scale lsr:translation transform requiredFeatures requiredExtensions systemLanguage requiredFormats requiredFonts nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable focusHighlight externalResourcesRequired size   |
| stop             | audio-level class color color-rendering display display-align fill fill-opacity fill-rule font-family font-size font-style font-variant font-weight id image-rendering line-increment offset pointer-events shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                       |
| svg              | audio-level baseProfile class color color-rendering contentScriptType display display-align externalResourcesRequired fill fill-opacity fill-rule font-family font-size font-style font-variant font-weight height id image-rendering line-increment playbackOrder pointer-events preserveAspectRatio shape-rendering snapshotTime solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width syncBehaviorDefault syncToleranceDefault text-anchor text-rendering timeLineBegin vector-effect version viewBox viewport-fill viewport-fill-opacity visibility width xml:base xml:lang xml:space zoomAndPan                                                                                                                        |

| Element name | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| switch       | audio-level class color color-rendering display display-align externalResourcesRequired fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                                                  |
| text         | audio-level color color-rendering display display-align editable fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight image-rendering line-increment lsr:rotation lsr:scale lsr:translation pointer-events requiredExtensions requiredFeatures requiredFormats rotate shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility x y                                                                                                                                             |
| title        | class id xml:base xml:lang xml:space                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| tspan        | audio-level class color color-rendering display display-align fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering vector-effect viewport-fill viewport-fill-opacity visibility xml:base xml:lang xml:space                                                                                                                                                                             |
| use          | audio-level class color color-rendering display display-align externalResourcesRequired fill fill-opacity fill-rule nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable font-family font-size font-style font-variant font-weight id image-rendering line-increment lsr:rotation lsr:scale lsr:translation overflow pointer-events requiredExtensions requiredFeatures requiredFormats shape-rendering solid-color solid-opacity stop-color stop-opacity stroke stroke-dasharray stroke-dashoffset stroke-linecap stroke-linejoin stroke-miterlimit stroke-opacity stroke-width systemLanguage text-anchor text-rendering transform vector-effect viewport-fill viewport-fill-opacity visibility x xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type xml:base xml:lang xml:space y |
| video        | audio-level begin display dur end externalResourcesRequired fullscreen nav-right nav-next nav-up nav-up-right nav-up-left nav-prev nav-down nav-down-right nav-down-left nav-left focusable height lsr:rotation lsr:scale lsr:syncReference lsr:translation overlay pointer-events repeatCount repeatDur requiredExtensions requiredFeatures requiredFormats syncBehavior syncTolerance systemLanguage transform transformBehavior type visibility width x xlink:actuate xlink:arcrole xlink:href xlink:role xlink:show xlink:title xlink:type y type preserveAspectRatio viewport-fill viewport-fill-opacity                                                                                                                                                                                                                                                                         |

In subclause 7.3 "SAF Packet", replace Figure 4, with:

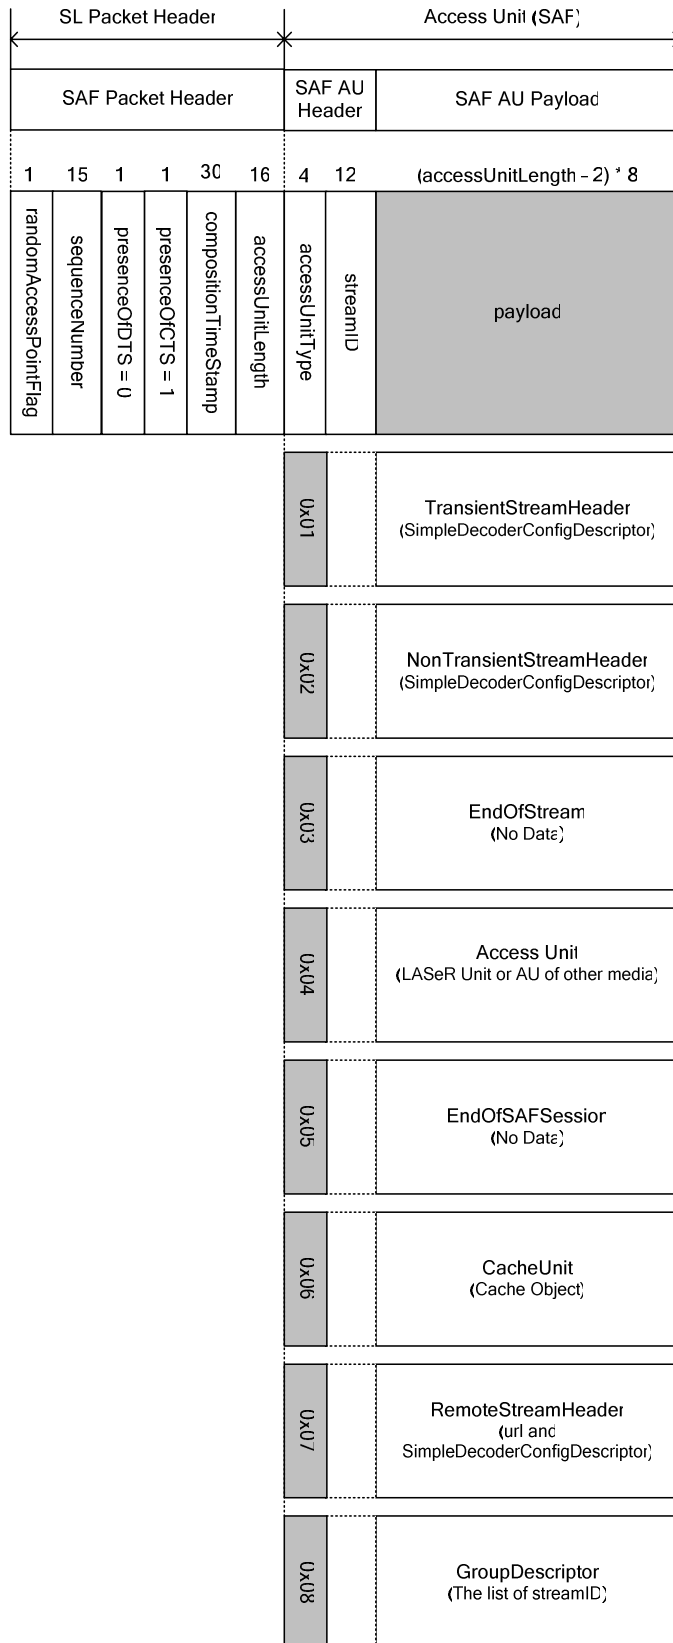

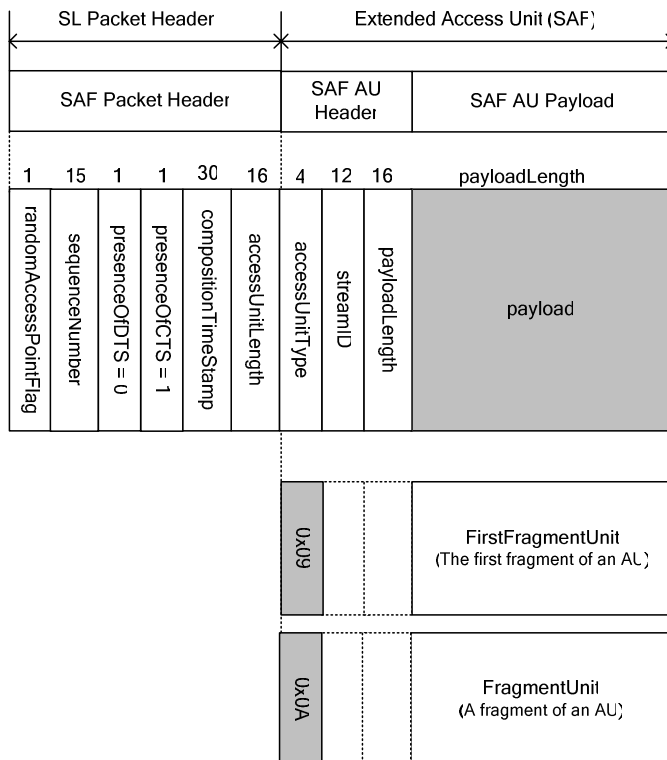

Replace subclause 7.4.1 SAF Packet Header syntax with the following:

```

class SAF_PacketHeader {
    bit(1) randomAccessPointFlag;
    bit(15) sequenceNumber;
    const bit(1) presenceOfDTS = 0;
    const bit(1) presenceOfCTS = 1;
    bit(30) compositionTimeStamp;
    uint(16) accessUnitLength;
}

```

Replace subclause 7.4.2 "SAF Packet Header semantics" with the following:

**sequenceNumber** – if present, successive packets shall either have the same sequence number or the value be continuously incremented as a modulo counter. Note – when two packets have the same sequence number, one can be ignored. Sequence numbers are incremented per SAF packet.

**randomAccessPointFlag** – when set to one indicates that random access to the content of this elementary stream is possible here. For SAF packets of type *TransientStreamHeader*, *NonTransientStreamHeader* or *RemoteStreamHeader*, the value of this flag shall be ignored.

**compositionTimeStamp** – is a composition time stamp.

For SAF packets of type *AccessUnit*, the composition time  $t_c$  of the first composition unit resulting from this packet is reconstructed from this composition time stamp according to the formula:

$$t_c = (\text{compositionTimeStamp} / \text{timeStampResolution} + k * 2^{30} / \text{timeStampResolution})$$

where  $k$  is the number of times that the **compositionTimeStamp** counter has wrapped around. The value of this field from two different packets may be same, if their **streamIDs** are different.

For streams which would require a different decoding time stamp and composition time stamp, such as MPEG-4 Part 10 (AVC) streams, the packets shall be provided in decoding order with composition time stamps, which means that time stamps may not be monotonically growing.

For SAF packets of type `cacheUnit`, this field specifies the validity period in second. In this case, the value 0 is reserved and the value 0x3FFFFFFF means that the Cache Unit never expires.

For SAF packets of type `TransientStreamHeader`, `NonTransientStreamHeader` or `RemoteStreamHeader`, this field specifies when the packet shall be processed.

When `TransientStreamHeader`, `NonTransientStreamHeader` or `RemoteStreamHeader` using a stream ID already in use are received, they shall be ignored by the terminal.

`accessUnitLength` – is the length in bytes of the SAF access unit conveyed in the SAF packet. The value of this field shall be at least 2. Value 1 is reserved for future ISO use. Value 0 signals that the payload of this SAF Packet is a SAF extended AU, as specified in subclause 7.6.

*Replace subclause 7.5.2 "SAF Access Unit Semantics" with the following:*

### 7.5.2 Semantics

`accessUnitType` – an indication about the type of the payload. Detailed values of `accessUnitType` and the data corresponding to each type are defined in Table 8

**Table 8 — `accessUnitType` values and corresponding data in the payload**

| Value       | Type of access unit payload           | Data in payload                                         |
|-------------|---------------------------------------|---------------------------------------------------------|
| 0x00        | Reserved                              | -                                                       |
| 0x01        | <code>TransientStreamHeader</code>    | A <code>SimpleDecoderConfigDescriptor</code>            |
| 0x02        | <code>NonTransientStreamHeader</code> | A <code>SimpleDecoderConfigDescriptor</code>            |
| 0x03        | <code>EndofStream</code>              | (no data)                                               |
| 0x04        | <code>AccessUnit</code>               | An Access Unit                                          |
| 0x05        | <code>EndOfSAFSession</code>          | (no data)                                               |
| 0x06        | <code>CacheUnit</code>                | A cache object                                          |
| 0x07        | <code>RemoteStreamHeader</code>       | An url and a <code>SimpleDecoderConfigDescriptor</code> |
| 0x08 ~ 0x0F | Reserved                              | -                                                       |

`streamID` – the reference of the media stream this AU belongs to. This identifier is local to the current SAF session.

`payload` – the data part of the access unit. The size of the payload is signalled by the `accessUnitLength` field in the packet header as specified in 7.4. The type of data in this field is varied by `accessUnitType` as defined in Table 8.

For values of `safAU.accessUnitType` that refer to `TransientStreamHeader` and `NonTransientStreamHeader`, the `payload` shall convey a `SimpleDecoderConfigDescriptor` whose syntax and semantics is specified in 7.6.

A `TransientStreamHeader` shall be used to indicate that the stream shall be used once and by only one media element. Continuous media should be marked as transient.

NOTE Implementations may optimize the resources for a stream using `TransientStreamHeader` as soon as no more media element references the stream.

For values of `safAU.accessUnitType` that refer to LAsER access unit or cache unit, the `payload` shall convey a access unit or cache unit which syntax and semantics are specified in this clause.

For values of `safAU.accessUnitType` that refer to an access unit, the `payload` shall convey an access unit for specific media whose syntax and semantics is opaque to this standard.

*In subclause 7.8.2, change the style of "with the addition of an url" to normal.*

*In subclause 7.9 Cache Unit, replace:*

After the end time, the cache object is expired and its SAF content cannot be executed.

*with:*

After the end time, the cache object is expired and its content cannot be executed.

*In subclause 7.9.2 Cache Unit Semantics, remove:*

The payload data shall replace the stored presentation referenced by the url of this cache unit when the `safAU.accessUnitType` is 0x06. Otherwise, the payload data shall be appended to the existing presentation.

*Create subclause 7.12 "SAF Extended Access Unit":*

## 7.12 SAF Extended Access Unit

### 7.12.1 Syntax

```
class safXAU {  
    bit(4) accessUnitType;  
    bit(12) streamID;  
    bit(16) payloadLength;  
    byte(8)[payloadLength] payload;  
}
```

### 7.12.2 Semantics

The value `accessUnitLength` in SAF Packets containing Extended Access Units shall be 0.

`accessUnitType` – the semantic is the same as in subclause 7.5.2.

`streamID` – the semantic is the same as in subclause 7.5.2.

`payload` – the data part of the access unit. The size of the payload is signalled in `payloadLength`. The type of data in this field is varied by `accessUnitType` as defined in Table 8 and in subclause 7.5.2.

*Add to subclause 7.11 EndOfSAFSession:*

When a SAFSession is closed (either by *EndOfSAFSession*, or by other means), all unused transient media stream originated in this SAF session may be discarded.

We call an unused media stream a stream that has no elements in the scene tree that reference the streamID of this media stream. For efficiency the content of `<Isr:conditional>` shall not be taken into account regarding streamID references.

*In subclause 8.1 "LASER Mini Overview", add the following paragraph:*

The purpose of LASER mini is to allow very constrained implementations of LASER, including J2ME implementations. One specific feature of mini is that the implementation does not need to implement 2 trees, one DOM tree and one composition tree, or otherwise keep the memory of the decoded value for each attribute.

*In subclause 8.2.2.5 "LASER Mini animations", add the following paragraph:*

Any content requiring the restoration of a DOM value of an attribute after it has been animated is non conformant. Authors shall make sure that, when deleting an animation or replacing an `xlink:href`, any previously animated value is made irrelevant by any appropriate mean (e.g. deletion of the target element, replacement of the animated value, etc.).

Create subclause 8.2.2.7 "LAsER Mini LAsER Commands" with:

#### 8.2.2.7 LAsER Commands

color-rendering, shape-rendering, text-rendering, image-rendering are not updatable in this profile.

In subclause 8.2.4 « Profile Definition », replace table with:

| Element name     | Attributes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a                | id externalResourcesRequired display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform xlink:href                                                                                                                                                                                                                                                                                                                                                          |
| animate          | id lsr:enabled begin end dur repeatCount repeatDur restart <b>attributeName fill="freeze" to xlink:href(no replace)</b> from by values calcMode keyTimes keySplines <b>additive="replace"</b> accumulate                                                                                                                                                                                                                                                                                         |
| animateColor     | id lsr:enabled begin end dur repeatCount repeatDur restart <b>attributeName fill="freeze" to xlink:href(no replace)</b> from by values calcMode keyTimes keySplines <b>additive="replace"</b> accumulate                                                                                                                                                                                                                                                                                         |
| animateMotion    | id path keyPoints rotate lsr:enabled begin end dur repeatCount repeatDur restart <b>fill="freeze" to xlink:href(no replace)</b> from by values calcMode keyTimes keySplines <b>additive="replace"</b> accumulate                                                                                                                                                                                                                                                                                 |
| animateTransform | id type lsr:enabled begin end dur repeatCount repeatDur restart <b>attributeName fill="freeze" to xlink:href(no replace)</b> from by values calcMode keyTimes keySplines <b>additive="replace"</b> accumulate                                                                                                                                                                                                                                                                                    |
| audio            | id externalResourcesRequired begin end clipBegin clipEnd repeatCount repeatDur syncBehavior syncTolerance audio-level syncReference requiredFeatures requiredExtensions systemLanguage requiredFormats xlink:href                                                                                                                                                                                                                                                                                |
| circle           | id cx cy r display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                        |
| conditional      | externalResourcesRequired id begin type lsr:enabled                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| cursorManager    | id x y xlink:href                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| defs             | id                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| desc             | id                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| ellipse          | id rx ry cx cy display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                    |
| foreignObject    | id externalResourcesRequired width height x y viewport-fill viewport-fill-opacity display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats                                                                                                                                                                                                                                                                                                                          |
| g                | id externalResourcesRequired display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                                                                     |
| image            | id externalResourcesRequired width height x y <b>transformBehavior(no geometric)</b> opacity display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform xlink:href                                                                                                                                                                                                                                                                                          |
| line             | id x1 y1 x2 y2 display stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                                                |
| linearGradient   | id gradient-units x1 x2 y1 y2 display visibility                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| ev:listener      | id lsr:enabled delay event observer timeAttribute handler propagate defaultAction target                                                                                                                                                                                                                                                                                                                                                                                                         |
| metadata         | id                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| mpath            | id xlink:href                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| path             | id d display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                              |
| polygon          | id points display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                         |
| polyline         | id points display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                         |
| radialGradient   | id gradient-units cx cy r display visibility                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| rect             | id width height x y rx ry display fill fill-opacity fill-rule stroke stroke-opacity stroke-width visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                         |
| rectClip         | id externalResourcesRequired size display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                                                                |
| selector         | id externalResourcesRequired choice display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                                                              |
| set              | id lsr:enabled begin end dur repeatCount repeatDur restart <b>attributeName fill="freeze" to xlink:href(no replace)</b>                                                                                                                                                                                                                                                                                                                                                                          |
| simpleLayout     | id externalResourcesRequired delta display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform                                                                                                                                                                                                                                                                                                                                                               |
| stop             | id offset display stop-color stop-opacity visibility                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| svg              | id externalResourcesRequired <b>width(not animatable if gradient with gradientUnits="userSpaceOnUse") height(not animatable if gradient with gradientUnits="userSpaceOnUse") viewBox(not animatable if gradient with gradientUnits="userSpaceOnUse")</b> preserveAspectRatio zoomAndPan viewport-fill viewport-fill-opacity syncBehavior syncBehaviorDefault syncTolerance syncToleranceDefault display pointer-events visibility color-rendering shape-rendering image-rendering text-rendering |
| switch           | id externalResourcesRequired display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats                                                                                                                                                                                                                                                                                                                                                                               |
| text             | id display display-align fill fill-opacity fill-rule font-family font-size font-style font-weight line-increment stroke stroke-opacity stroke-width text-anchor visibility requiredFeatures requiredExtensions systemLanguage requiredFormats editable x y transform text-decoration                                                                                                                                                                                                             |
| title            | id                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

|       |                                                                                                                                                                                                                                                                                                                                                               |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| tspan | id display fill fill-opacity fill-rule font-family font-size font-style font-weight line-increment stroke stroke-opacity stroke-width text-anchor visibility requiredFeatures requiredExtensions systemLanguage requiredFormats text-decoration                                                                                                               |
| use   | id externalResourcesRequired overflow x y display visibility requiredFeatures requiredExtensions systemLanguage requiredFormats transform xlink:href                                                                                                                                                                                                          |
| video | id externalResourcesRequired begin end clipBegin clipEnd repeatCount repeatDur syncBehavior syncBehaviorDefault syncTolerance syncToleranceDefault audio-level syncReference requiredFeatures requiredExtensions systemLanguage requiredFormats xlink:href width height x y <b>overlay="top   LAsER_fullscreen" transformBehavior(no geometric) transform</b> |

In subclause 12.1.4 "Animations and updates", replace Table 11 with the following:

| Type              | Encoded value |
|-------------------|---------------|
| ANIMTYPE_string   | 0             |
| ANIMTYPE_float    | 1             |
| ANIMTYPE_path     | 2             |
| ANIMTYPE_pointSeq | 3             |
| ANIMTYPE_fraction | 4             |
| ANIMTYPE_color    | 5             |
| ANIMTYPE_enum     | 6             |
| reserved          | 7             |
| ANIMTYPE_floats   | 8             |
| ANIMTYPE_point    | 9             |
| ANIMTYPE_id       | 10            |
| ANIMTYPE_font     | 11            |
| ANIMTYPE_uri      | 12            |

Replace Table 12 with the following:

| Attribute name  | Encoded type for animation | Attribute name        | Encoded type for animation |
|-----------------|----------------------------|-----------------------|----------------------------|
| a.target        | ANIMTYPE_string            | r                     | ANIMTYPE_float             |
| audio-level     | ANIMTYPE_fraction          | rotate                | ANIMTYPE_float             |
| choice          | ANIMTYPE_enum              | rx                    | ANIMTYPE_float             |
| color           | ANIMTYPE_color             | ry                    | ANIMTYPE_float             |
| color-rendering | ANIMTYPE_enum              | shape-rendering       | ANIMTYPE_enum              |
| cx              | ANIMTYPE_float             | size                  | ANIMTYPE_point             |
| cy              | ANIMTYPE_float             | stop-color            | ANIMTYPE_color             |
| d               | ANIMTYPE_path              | stop-opacity          | ANIMTYPE_fraction          |
| display         | ANIMTYPE_enum              | stroke                | ANIMTYPE_color             |
| display-align   | ANIMTYPE_enum              | stroke-dasharray      | ANIMTYPE_floats            |
| editable        | ANIMTYPE_enum              | stroke-dashoffset     | ANIMTYPE_float             |
| fill            | ANIMTYPE_color             | stroke-linecap        | ANIMTYPE_enum              |
| fill-opacity    | ANIMTYPE_fraction          | stroke-linejoin       | ANIMTYPE_enum              |
| fill-rule       | ANIMTYPE_enum              | stroke-miterlimit     | ANIMTYPE_float             |
| nav-next        | ANIMTYPE_id                | stroke-opacity        | ANIMTYPE_fraction          |
| nav-prev        | ANIMTYPE_id                | stroke-width          | ANIMTYPE_float             |
| nav-right       | ANIMTYPE_id                | target                | ANIMTYPE_string            |
| nav-up          | ANIMTYPE_id                | text-anchor           | ANIMTYPE_enum              |
| nav-up-right    | ANIMTYPE_id                | transform             | ANIMTYPE_floats            |
| nav-up-left     | ANIMTYPE_id                | type                  | ANIMTYPE_enum              |
| nav-down        | ANIMTYPE_id                | vector-effect         | ANIMTYPE_enum              |
| nav-down-right  | ANIMTYPE_id                | viewBox               | ANIMTYPE_floats            |
| nav-down-left   | ANIMTYPE_id                | viewport-fill         | ANIMTYPE_color             |
| nav-left        | ANIMTYPE_id                | viewport-fill-opacity | ANIMTYPE_fraction          |
| focusable       | ANIMTYPE_id                | visibility            | ANIMTYPE_enum              |
| font-family     | ANIMTYPE_font              | width                 | ANIMTYPE_float             |
| font-size       | ANIMTYPE_float             | x                     | ANIMTYPE_float             |
| font-style      | ANIMTYPE_enum              | x1                    | ANIMTYPE_float             |