



INTERNATIONAL STANDARD ISO/IEC 21000-4:2006
TECHNICAL CORRIGENDUM 1

Published 2012-03-15

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION
INTERNATIONAL ELECTROTECHNICAL COMMISSION • МЕЖДУНАРОДНАЯ ЭЛЕКТРОТЕХНИЧЕСКАЯ КОМИССИЯ • COMMISSION ÉLECTROTECHNIQUE INTERNATIONALE

Information technology — Multimedia framework (MPEG-21) —
Part 4:
Intellectual Property Management and Protection Components

TECHNICAL CORRIGENDUM 1

Technologies de l'information — Cadre multimédia (MPEG-21) —

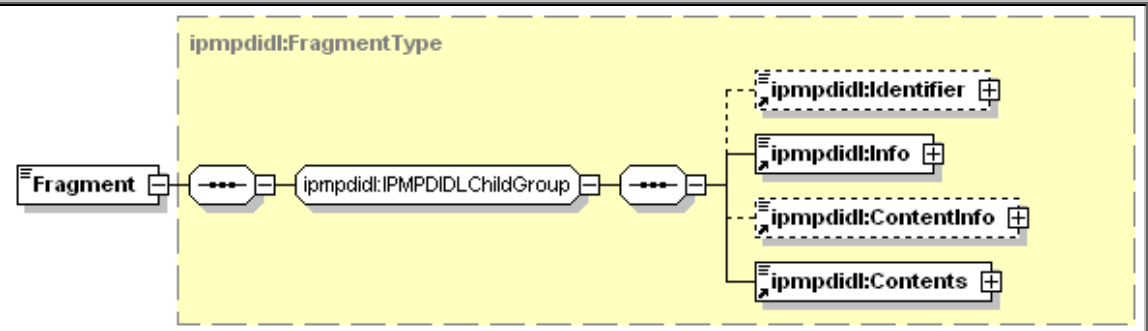
Partie 4: Composants de gestion et de protection de propriété intellectuelle

RECTIFICATIF TECHNIQUE 1

Technical Corrigendum 1 to ISO/IEC 21000-4:2006 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

Replace the contents of 6.2.7 with the following:

6.2.7.1 Syntax

Diagram				
Children	<Identifier> <Info> <ContentInfo> <Contents>			
Attributes	Name	Type	Use	Semantics
	fragmentId	String	Required	A string specifying a fragment identifier as defined in IETF RFC 3986 that locates the protected part within the associated <i>resource</i> .
Source	<pre><complexType name="FragmentType" mixed="true"> <complexContent mixed="true"> <extension base="didmodel:FragmentType"> <sequence> <group ref="ipmpdidl:IPMPDIDLChildGroup"/> </sequence> <attribute name="fragmentId" type="string"/> </extension> </complexContent> </complexType></pre>			

6.2.7.2 Semantics

The ipmpdidl:Fragment element is defined to provide for the communication of IPMP governance on a specific Fragment originally represented in DIDL. The fragment location where IPMP governance applies is described by the fragmentID attribute. The semantics of the fragmentID attribute is as defined in ISO/IEC 21000-17. The example of using ipmpdidl:Fragment is shown in Annex G.