PD ISO/TS 15926-11:2015



BSI Standards Publication

Industrial automation systems and integration — Integration of life-cycle data for process plants including oil and gas production facilities

Part 11: Methodology for simplified industrial usage of reference data

bsi.

...making excellence a habit.™

Document Sharing Hub

Full document details: PD ISO/TS 15926-11:2015

National foreword

This Published Document is the UK implementation of ISO/TS 15926-11:2015.

The UK participation in its preparation was entrusted to Technical Committee AMT/4, Industrial data and manufacturing interfaces.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015. Published by BSI Standards Limited 2015

ISBN 978 0 580 81382 5

ICS 25.040.40; 75.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 June 2015.

Amendments issued since publication

Date	Text affected

Documents
Document Sharing Hub

Full document details: PD ISO/TS 15926-11:2015

PD ISO/TS 15926-11:2015

TECHNICAL SPECIFICATION

ISO/TS 15926-11

First edition
2015-05-01

Industrial automation systems and integration — Integration of life-cycle data for process plants including oil and gas production facilities —

Part 11: Methodology for simplified industrial usage of reference data

Systèmes d'automatisation industrielle et intégration — Intégration de données de cycle de vie pour les industries de "process", y compris les usines de production de pétrole et de gaz —

Partie 11: Méthodologie pour un usage industriel simplifié des données de référence

Reference number
ISO/TS 15926-11:2015(E)

Documents
Document Sharing Hub
© ISO 2015

Full document details: PD ISO/TS 15926-11:2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Documents
Document Sharing Hub

© ISO 2015 – All rights reserved

Full document details: PD ISO/TS 15926-11:2015

Contents

Page

Foreword ... **iv**

Introduction ... **v**

1 Scope ... **1**

2 Normative references ... **1**

3 Terms, definitions and abbreviated terms ... **1**
3.1 Terms and definitions ... 1
3.2 Abbreviated terms ... 4

4 Fundamental concepts and assumptions ... **4**
4.1 Purpose and objectives ... 4
4.2 Positioning of this part of ISO 15926 ... 5
4.3 Use of statements within ISO 15926 ... 6
4.4 Requirements of statements ... 7
4.5 Representing statements in RDF triples ... 8
4.6 RDF Named Graph ... 11
4.7 Connecting RDF with a Reference Data Library (RDL) ... 13
4.8 Use of RDF with a RDL of relationships ... 15

5 Methodology for using Named Graphs ... **16**
5.1 Building constructs of the methodology ... 16
5.2 Named Graph methodology ... 17
5.3 Metadata of a Named Graph ... 19
5.4 Example Named Graph methodology within projects ... 19
5.4.1 Introducing the basic types of Named Graphs within this part of ISO 15926 ... 19
5.4.2 Introducing project specific individuals ... 21
5.4.3 Introducing project specific relationships ... 22
5.4.4 Introducing project specific statements ... 25
5.5 Example Named Graph methodology within product knowledge modelling ... 29
5.5.1 Introducing product specific individuals ... 29
5.5.2 Introducing project specific relationships ... 30
5.5.3 Introducing product specific statements ... 31

6 Reference Data ... **34**
6.1 Origin of the initial set of relationships ... 34
6.2 Reference information models representing Systems Engineering ... 37

7 Initial set of reference relationships ... **53**

8 Position of this part in relation with other parts and standards ... **54**
8.1 The relationship of this part of ISO 15926 with ISO 15926-2 and ISO/TS 15926-7 ... 54
8.2 The relationship of this part of ISO 15926 with ISO 10303-233 ... 56

Annex A (normative) **Initial set of relationships** ... **57**

Annex B (normative) **Possible syntax formats of Named Graphs** ... **58**

Annex C (informative) **Examples of application areas for this part of ISO 15926** ... **60**

Annex D (informative) **Origin of representation engineering data by triples** ... **64**

Bibliography ... **66**

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is Technical Committee ISO/TC 184, *Automation systems and integration*, Subcommittee SC 4, *Industrial data*.

ISO 15926 is organized as a series of parts, each published separately. The structure of ISO 15926 is described in ISO 15926-1.

ISO 15926 consists of the following parts, under the general title *Industrial automation systems and integration — Integration of life-cycle data for process plants including oil and gas production facilities*:

— *Part 1: Overview and fundamental principles;*

— *Part 2: Data model;*

— *Part 3: Reference data for geometry and topology* [Technical Specification]*;*

— *Part 4: Initial reference data* [Technical Specification]*;*

— *Part 6: Methodology for the development and validation of reference data* [Technical Specification]*;*

— *Part 7: Implementation methods for the integration of distributed systems: Template methodology* [Technical Specification]*;*

— *Part 8: Implementation methods for the integration of distributed systems: Web Ontology Language (OWL) implementation* [Technical Specification];

— *Part 11: Methodology for simplified industrial usage of reference data* [Technical Specification]

The following parts are under preparation:

— *Part 9: Implementation methods for the integration of distributed systems: Facade implementation* [Technical Specification]*;*

— *Part 10: Conformance testing* [Technical Specification]

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

Introduction

ISO 15926 is an International Standard for the representation of process industries facility life-cycle information. This representation is specified by a generic, conceptual data model that is suitable as the basis for implementation in a shared database or data warehouse. The model is designed to be used in conjunction with reference data, that is, standard instances that represent information common to a number of users, production facilities, or both. The support for a specific life-cycle activity depends on the use of appropriate reference data in conjunction with the model.

This part of ISO 15926 focuses on a simplified implementation of the afore mentioned data model in the context of engineering data in the area of the process industry, including the oil, gas, process and power industry and is intended for developers of configuration management processes and systems in general.

This part of ISO 15926 provides the capability to express a product model with RDF triples, RDF Named Graphs and a standardized set of natural language relationships resulting in a table that can be exchanged and shared easily in industry.

There is an industry need for this part of ISO 15926.

— The triple relationships are easy to understand by an engineer so that an engineer can understand the product model. This has been proven by the NL Ship Building group who developed a Gellish-RDF based implementation for standardized exchange of product data of HVAC equipment on a daily basis.

— The standard data sheets from API, NORSOK, etc. used in industry for pumps, compressors, instruments, etc. can be supported by a Gellish-RDF product model enabling industry to continue to work with their specific data sheets and yet exchanging the data in standardized way according this new standard. This has been proven by the ICAAMC compressor group in a pilot for the API 617 data sheet.

— It is used in some projects, e.g. in the Pearl project for oil and gas.

— This part of ISO 15926 can be used as a front end engineering layer for the template methodology used by ISO/TS 15926-7 and ISO/TS 15926-8, e.g. in the FIATECH project IIP. This will make the content of those projects easier to access by engineers.

— An EPC contractor has used the draft of this part of ISO 15926 in various tunnel projects for information modelling in the area of systems engineering which was required by the Dutch authority regulations. With this part of ISO 15926 enriched by the knowledge from ISO/IEC 15288, this became possible. They also built a performance measuring system for operational data in tunnel installations where the methodology of this part of ISO 15926 is used to justify the performance to the ministry of transportation in the Netherlands.

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

Documents
Document Sharing Hub

Full document details: PD ISO/TS 15926-11:2015

Industrial automation systems and integration — Integration of life-cycle data for process plants including oil and gas production facilities —

Part 11: Methodology for simplified industrial usage of reference data

1 Scope

This part of ISO 15926 enables a flexible creation of product knowledge models that can be exchanged in the plant engineering supply chain by combining RDF triples within named graphs, reference data dictionaries and a standardized set of relationships.

This part of ISO 15926 is appropriate for use with ISO 15926 reference data libraries, and it is applicable to the oil, gas, process and power industries.

The following are within the scope of this part of ISO 15926:

— process plants in accordance with ISO 15926-1;

— use of RDF triples representing statements as defined in the ISO 15926 series;

— an initial set of relationships required for process plant life cycle representation;

— rules for the use of RDF Named Graphs for product data representation and exchange;

— examples of possible implementations.

The following are outside the scope of this part of ISO 15926:

— definition of reference data libraries;

— the syntax and format of implementations of product data models and/or instance data using this part of ISO 15926;

— any specific methods and guidelines other than RDF Named Graphs for implementing ISO 15926-2.

2 Normative references

The following referenced documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/TS 15926-4, *Industrial automation systems and integration — Integration of life-cycle data for process plants including oil and gas production facilities — Part 4: Initial reference data*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub

Full document details: PD ISO/TS 15926-11:2015

3.1.1
class
category or division of things based on one or more criteria for inclusion and exclusion

Note 1 to entry: A class need not have any members (things that satisfy its criteria for membership).

[SOURCE: ISO 15926-1:2004, 3.1.1, modified]

3.1.2
characteristic data
description of an entity by the class to which it belongs and a set of property values

Note 1 to entry: ISO 13584, ISO 15926, ISO 22745, ISO 13399, and ISO/TS 29002 all include characteristic data in their data models.

[SOURCE: ISO 8000-2:2012, 7.2, modified]

3.1.3
data
representation of information in a formal manner suitable for communication, interpretation, or processing by human beings or computers

[SOURCE: ISO 10303-1:1994, 3.2.14]

3.1.4
formal syntax
specification of the valid sentences of a formal language using a formal grammar

Note 1 to entry: A formal language is computer-interpretable.

EXAMPLE 1 An XML document type definition (DTD) is a formal syntax.

EXAMPLE 2 ISO 10303-21, contains a formal syntax in WSN for ISO 10303 physical files.

[SOURCE: ISO 8000-2:2012, 6.1, modified]

3.1.5
information
facts, concepts, or instructions

[SOURCE: ISO 10303-1:1994, 3.2.20]

3.1.6
Named Graph
key concept of Semantic Web architecture in which a set of Resource Description Framework (RDF triples) statements (a graph) are identified using a unique URI

Note 1 to entry: Named Graphs is the idea that having multiple RDF graphs in a single document/repository and naming them with URIs provides useful additional functionality built on top of the RDF Recommendations

[SOURCE: W3C Recommendation 25 February 2014, modified]

3.1.7
N-Quad statement
N-Quad
sequence of RDF terms representing the subject, predicate, object and graph identifier of an RDF Triple and the graph it is part of in a dataset

Note 1 to entry: These may be separated by white space. This sequence is terminated by a '.' and a new line (optional at the end of a document).

EXAMPLE < http://one.example/subject1> < http://one.example/predicate1> < http://one.example/object1> < http://one.example/graph3> . # comments here.

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

[SOURCE: W3C Recommendation 25 February 2014, modified]

3.1.8
RDF graph
graph structure formed by a set of RDF triples

[SOURCE: W3C Recommendation 25 February 2014]

3.1.9
reference data
facility life-cycle data that represents information about classes or individual things which are common to many facilities or of interest to many users

[SOURCE: ISO 15926-1:2004, 3.1.18, modified]

3.1.10
reference data library
RDL
managed collection of reference data

[SOURCE: ISO 15926-1:2004, 3.1.19]

3.1.11
relationship
abstract object that indicates something that one thing has to do with another

[SOURCE: ISO 15926-2:2003, 4.6.4, modified]

3.1.12
semantic encoding
technique of replacing natural language terms in a message with identifiers that reference data dictionary entries

[SOURCE: ISO 8000-2:2012, 6.2]

3.1.13
statement
fact
information that is regarded as indivisible

Note 1 to entry: A statement can be recorded as an instance of the entity relationship in ISO 15926-2. A set of one or more statements can be recorded in shorthand form as a single item as an instance of a template, as defined in ISO/TS 15926-7.

[SOURCE: ISO/TS 15926-6:2013, 3.1.25]

3.1.14
thing
actual part of the real world, perceived part of the real world, or subject of thought

Note 1 to entry: A thing can be a material or non-material object, idea or action.

Note 2 to entry: This definition is adapted from ISO 15926-2, within which “thing” is an entity, but not a defined term.

[SOURCE: ISO/TS 15926-6:2013, 3.1.26]

3.1.15
triple
RDF-triple, representation of a relation between the objects or data that it links

Note 1 to entry: A triple comprises at least:

— an object called “subject”;

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

— a predicate (also called property) that denotes a relationship between a subject and an object;

— an object or data called "object".

[SOURCE: W3C Recommendation 25 February 2014]

3.1.16
product
thing or substance produced by a natural or artificial process

[SOURCE: ISO 10303-1:1994, 3.2.26]

3.1.17
product data
representation of information about a product in a formal manner suitable for communication, interpretation, or processing by human beings or by computers

[SOURCE: ISO 10303-1:1994, 3.2.27]

3.2 Abbreviated terms

IDM	Information Delivery Manual
RDL	Reference Data Library
RDF	Resource Description Framework
RDFS	Resource Description Framework Schema
SPARQL	Protocol and RDF Query Language
TriX	Triples in XML
URI	Uniform Resource Identifier
W3C	World Wide Web Consortium

4 Fundamental concepts and assumptions

4.1 Purpose and objectives

This part of ISO 15926 provides a semantic modelling methodology of engineering data that can be relatively "easily" understood by engineers and that is flexible in terms of tailoring the methodology for a specific domain or project. The provided modelling methodology is based on the existing parts ISO 15926-2 and ISO/TS 15926-4. To achieve this, the triple concept of the RDF standard of W3C supplemented with the Named Graph concept of W3C is adopted and augmented with a set of relationships further called the "initial set of relationships".

Reason for developing this methodology can be found in the fact that product specialists and engineers, especially within Small and Medium Enterprises (SMEs), who in general have limited skills in the area of information modelling and related techniques, and they should be supported in their product and or engineering knowledge modelling activities by a simple to use methodology, close to natural languages. Using this methodology will lead to models that are upgradable to full ISO 15926-2 compliant models. In other words this methodology provides a bridge to the much more complex ISO 15926-2 world and provide a low entry threshold to ISO 15926. Also the fact in development work is that humans like to work with simple table based structures rather than relatively complicated schemes should be respected if possible.

In line with this, this part of ISO 15926 offers a way to industry groups to set up and exchange their product model using a low level modelling methodology based on statements in a table manner. This part of ISO 15926 provides for that purpose a normative set of rules that allows engineers to build

© ISO 2015 – All rights reserved
AVA Documents Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

a product and plant lifecycle models using statements based on a normative set of relationships and normative reference data. A statement is: that which is the case, independent of natural language. A statement can be used to classify things as 'being the case'. Statements can be expressed in languages as relationships between two roles of things (respectively "thing playing role 1" and "thing playing role 2").

With the help of this part of ISO 15926, one is able to express any kind of product or engineering information and exchanging this information based on a managed set of reference data, including information concerning all relevant (system life cycle) processes to realize and maintain the product. This part of ISO 15926 provides a semantic modelling methodology for creating and exchanging engineering data, originating from Systems Engineering processes.

4.2 Positioning of this part of ISO 15926

Figure 1 shows the layers that can be distinguished looking at data exchange in general. Within this figure the upper layer represents the role that a specific organization or enterprise plays in the exchange of information. The origin and scope of the information is represented by the second layer. For this part of ISO 15926, the origin can be seen as applicable quality aspects of information as defined in ISO 8000-1, while the scope of the information exchange is ISO/IEC 15288, specific in the context of process industry.

The content layer represents the meaning of the objects that are exchanged as defined by the RDL ISO/TS 15926-4.

The semantic layer is the scope of this part of ISO 15926 and is represented by the RDF Named Graph methodology as described within this part of ISO 15926.

The syntax layer represents the technology that is used to physically exchange the data that represents the information to be exchanged. This part of ISO 15926 prescribes not a standard for any exchange syntax, only gives examples of possible syntax formats as given in Annex B.

The storage layer describes the technology that is used to store the information and can be done by means of a triple store, a graph database or a traditional relational database management system.

Within a specific project each layer can be specified by means of a project-specific "Information Delivery Manual".

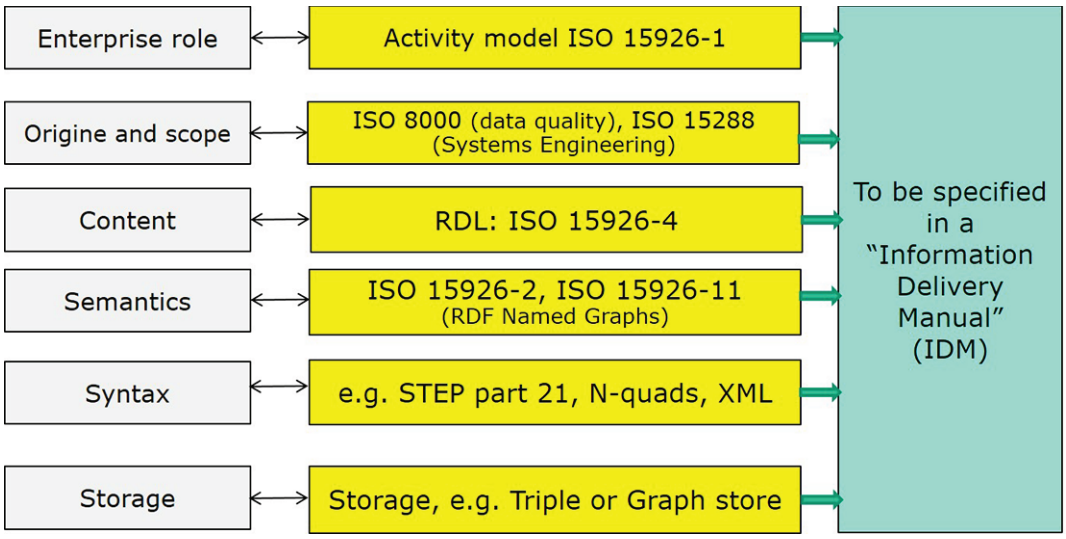


Figure 1 — Positioning of this part of ISO 15926 in a view on data exchange

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

4.3 Use of statements within ISO 15926

The aim of this part is to realize a human readable expression of engineering data that can be supported and managed by computers where the aim of ISO 15926-2 is a full understanding of engineering data by computers. Starting point of this part is that engineering data expressed according to this part can be (manually) transformed to the level of ISO 15926-2. For this reason some principles of ISO 15926-2 are respected and other are simplified by means of "short cut" relationships but anyway consistent with part ISO 15926-2

The expression of a statement consists of "object (playing a role 1) –> relationship –> object (playing a role 2)" following the simplest possible grammatical pattern: subject – > verb – > object. This is also called a triple in the context of Resource Description Framework (RDF) developed within the W3C community (see also Figure 4).

RDF is a language for expressing data models using statements in triple formats and sharing them with other people and machines. Since it is a W3C "Recommendation", large collections of tools and services are available. The principle of using statements describing a "specific world" (an ontology) can replace fixed data models and provides an extensible ontology with reference data with the aim to defining, customizing and harmonizing systems. For this aim, the methodology described in this part of ISO 15926 uses for this goal taxonomy of relationships and a taxonomy of "things" to be able to describe the world in a consistent and explicit way. This is provided by the rule that relevant things in the real world must be classified by a class in a reference data library.

In Figure 2, the principle of the object - relation - object mechanism is shown. The left side object (playing a role 1) "airco xyz" is classified as the right side object (playing a role 2) being an "air-conditioning unit". In the same way the "capacity airco xyz" is classified as a "nominal cooling capacity". The given information is for human explicit and readable and correspondents with the information that usually can be found in a datasheet. As example the "capacity airco xyz" is quantified in kW and has a magnitude of 100. Engineers are integrating the facts expressed in sentences with all that they already know such that engineers are able to utilize the meaning that they derived from the statements given to create new knowledge which can be easily communicated with colleagues resulting in actions.

While statements (data model expressed in triple formats) that RDF uses is very simple and easy to understand, but the serialized representation tends to get complicated for engineers to visualize the whole structure of knowledge and communicate it to colleagues. An RDF graphical representation of statements is here to help engineers since RDF also provides a standard way of expressing graphs of statements and sharing them with colleagues and computers on line and/or off line. Further ontologies provide engineers to express the rules for inference from statements. An engineer shares his ontology with his colleague it should have all knowledge he should have to draw same conclusions from statements on hands. And same thing will be true with machines if they commit to share the same ontologies.

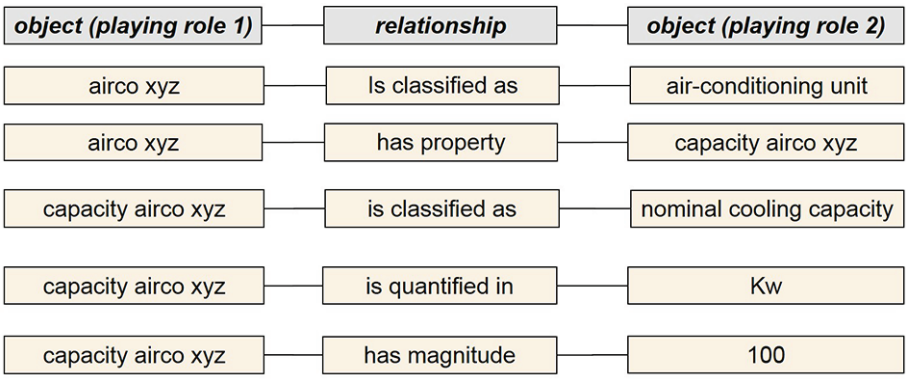


Figure 2 — Representation of a piece of product information in statements

Both objects in a statement have each a specific role, related to the meaning of the relationship. As a result of this a statement always must be readable in two directions, from left to right and from right to left. So each relationship as defined in the initial set has two names: the "prescribed" name reading

© ISO 2015 – All rights reserved
Documents Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

from an object playing a role 1 and an object playing a role 2 and the reverse name, reading from an object playing a role 2 to an object playing a role 1 (airco xyz has role 1 and capacity airco xyz has role 2 with respect to the relation). The reverse statements of Figure 2 are shown in Figure 3.

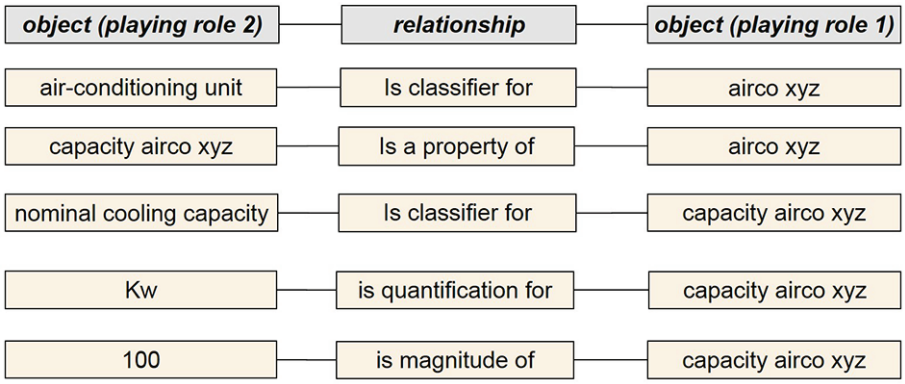


Figure 3 — Statements of Figure 2 in reverse direction

One of the advantages of using statements as shown in this clause is that one is able with one and the same methodology to describe product model data and create instance data in a repository as well but also exchange both kinds of data between parties and or configuration management systems.

4.4 Requirements of statements

In general there is, in the context of engineering data, a need to be able to make statements about statements. This ability is within in standard realized by identifying each statement by a unique identifier. Therefore each statement is provided with a Uniform Resource Identifier (URI). By referring to a specific URI one can make a statement about the statement that is represented by that URI.

EXAMPLE Who has stated a specific statement and when has he made that statement in time are examples of statement about statements.

When in industry parties communicate (exchanging statements) with each other in general there is a need for explicit statements about exchanged statements. These statements about statements support the workflow of processing industrial data along the supply chain. Together with providing provenance, these are fundamental requirements for exchanging as well as referencing and archiving industrial data electronically.

In this part the following statements about statements are recognized to facilitate engineering transactional usage:

— creator of a statement (party or role);

— date and time of creation of the statement;

— modifier of a statement (party or role);

— date and time of modification of a statement;

— certainty of a statement; possible values (instances) for certainty can be “estimated”, “calculated” or “as-build”), supporting of ranking the probability of the correct value of property values;

— modality of a statement; possible modal verbs to express the modus of a statement: possible values (instances) of modality are “Can be”, “Shall be” and “Shall have” supporting requirement management and modelling product knowledge. Default the modus of a statement will be “is the case”;

— intention of a statement, possible values (instances) of intention are: “requested”, “proposed”, “approved”. Supporting the workflow in the exchange process and change management, especially for property values;

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

— cardinality of an element (specific the “object playing role 2”) within a statement, supporting requirement management and product knowledge modelling;

— versioning of a statement, supporting library versioning and base lining in the context of configuration management;

— relating a statement to a specific system life cycle, making the difference between information that is relevant for the conceptual design, detailed design or the maintenance stage of a system;

— defining the “begin of life” and “end of life” of a statement in order to be able to pinpoint the period in time that the specific statement is valid.

In 5.4 and 5.5 the implementation of afore mentioned requirements is been made explicit by means of examples.

This method can define schemas as well as instances of the scheme defined in neutral format and can be implemented using any syntax layer, e.g. a spread sheet, XML, as shown in Annex B.

4.5 Representing statements in RDF triples

The Resource Description Framework (RDF) is a formal language from the W3C community that makes it possible to describe the semantics of information in similar way as the statement mechanism described in 4.3. RDF is a general-purpose language; originally meant for representing information on the Web. It defines a language for describing relationships among resources in terms of named properties and values. Properties in the context of RDF are instances of the class rdf:Property and describe a relationship between subject resources (left side of the relationship within a statement, the role 1 element) and object resources (right side of the relationship, the role 2 element within a statement). When used as such a property is a predicate in the context of RDF.

RDF provides no mechanisms for describing properties, nor does it provide any mechanisms for describing the relationships between properties and other resources. That is the role of the RDF vocabulary description language, RDF Schema (RDFS). RDFS defines classes and properties that may be used to describe classes, properties and other resources. These resources are used to determine characteristics of other resources, such as the domains and ranges of properties. RDFS vocabulary descriptions are written in RDF.

Most of the abstract model of RDF comes down to four simple rules:

— a statement is expressed as a Subject-Predicate-Object triple: this is similar to a (short) English sentence;

— subjects, predicates, and objects are given as names for entities, also called resources (dating back to the application of RDF to metadata for web resources) or nodes (from graph terminology): entities represent something, a person, website, or something more abstract like states and relations;

— names are URIs, which are global in scope, always referring to the same entity in any RDF document in which they appear;

— objects can also be given as text values, called literal values, which may or may not be typed using XML Schema data types.

The simplicity and flexibility of the triple in combination with the use of URIs for globally unique names for subjects, predicates and objects makes RDF unique, and very powerful. It is a specification that fills a very particular niche for decentralized, distributed knowledge and provides a framework to enable computer applications to answer complex questions.

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

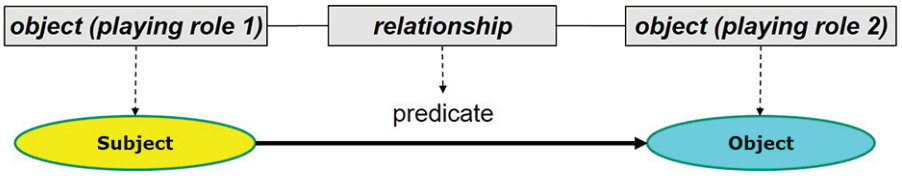


Figure 4 — Adopt RDF triple principle to represent a statement

The design of RDF can be characterized as:

— is based on a simple data model;

— enables a certain level of formal semantics and provable, traceable inference;

— uses an extensible URI-based vocabulary;

— uses an XML-based syntax, supporting XML schema data-types;

— allows anyone to make statements about any resource.

The underlying structure of any expression in RDF is a collection of triples, each consisting of a subject, a predicate and an object. A set of such triples is called an RDF graph. This can be seen in the diagram shown in Figure 4, a triple being described by as a node-arc-node link. An RDF triple is conventionally written in the order subject, predicate, object. The direction of the arc is significant: it always points toward the object by means of an arrow. This way of visualization of statements allows users to gain better grasps of models and instances of models they defined in table manner.

The assertion of an RDF triple says that some relationship, indicated by the predicate, holds between the things denoted by subject and object of the triple, in other words, visualization as an arc is useful to clearly identify the predicate (equal to a relationship) between two things. The assertion of an RDF graph amounts to asserting all the triples in it, so the meaning of an RDF graph is the conjunction (logical AND) of the statements corresponding to all the triples it contains:

— RDF provides a data model for objects and relations between them and provides a simple semantics for the data model;

— RDF Schema provides a vocabulary for describing properties and classes of RDF objects, with semantics for generalization-hierarchies of such properties and classes.

RDF is using the principle of Linked Data. Linked Data describes a method of publishing structured data so that it can be interlinked and become more useful. It enables integrating knowledge from other vocabularies into a product model making a formal reference to elements of those vocabularies in a way that can be read automatically by computer by means of SPARQL, the query language for RDF. Linked Data uses URIs to denote things. Specific HTTP URIs are used so that these things can be referred to and looked up ("dereferenced") by people and user agents.

In this part of ISO 15926, URIs are as follows:

— a URI (Uniform Resource Identifier) is a compact string of characters that is used to identify a subject, predicate, object or Named Graph;

— a hash (#) URI is used whenever one wants to refer to something that doesn't live on the web, with the base URI providing information about that thing;

— a slash (/) URI is used whenever one wants to refer to something that is live and addressable on the web;

— in general, a namespace is a container for a set of identifiers (names). Namespaces usually group names based on their functionality. A namespace can be part of a URI;

— an absolute URI reference consists of three parts: a scheme, a scheme-specific part and a fragment identifier.

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

EXAMPLE 1 http://standards.iso.org/iso/15926/-4/tech/reference-data#RDL7459 as an example of an hash URI of a class from ISO/TS 15926-4 is broken down as follows, where the first three parts are the name space of the URI:

http	:scheme
http://standards.iso.org/iso	:authority
/15926/-4/tech/reference-data	:path
RDL7459	:fragment

For the fragment part of a Named Graph, preferably a universally unique identifier, is used as defined in ISO/IEC 11578:1996.

EXAMPLE 2 Example of a universally unique identifier (UUID) according to ISO/IEC 11578:1996 is: http://example.com/myproject#40bb99c0-1f74-11e2-81c1-0800200c9a66

NOTE 1 For the naming of objects, this part of ISO 15926 uses the practice of CamelCase for writing compound words. When writing relationships each compound word starts with a lower case letter. Any object not being a relationship starts with a capital, a relationships start with a lower case.

In this part of ISO 15926, the used name spaces are:

— "www.example.com/myproject#" to identify project specific things where the namespace www.example.com/myproject#" is represented by the string "myproject:";

— "www.example.com/part2#" to identify concepts derived from ISO 15926-2 where the namespace "www.example.com/part2#" is represented by the string "part2:";

— "www.example.com/part4#" to identify concepts derived from ISO/TS 15926-4 where the namespace "www.example.com/part4#" is represented by the string "part4:";

— "www.example.com/part11#" to identify relationships and types of Named Graph, where the namespace "www.example.com/part11#" is represented by the string "part11:";

— "www.example.com/library#" for things that comes from a private library where the namespace "www.example.com/library#" is represented by the string "library:".

EXAMPLE 3 Figure 5 shows an example of a set of graphs that represents a set of statements about the specification of a property "nominal load weight" of a typical pedestal crane, including the classification of a pedestal crane. The used namespace is "library:". The statements represented by Figure 5 are:

— "pedestal crane" is a subclass of "crane";

— "crane" has a property "nominal load weight";

— "nominal load weight" is a subclass of property "weight";

— "nominal load weight" has an upper boundary of "440";

— "nominal load weight" is quantified using the UOM "tonnes".

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

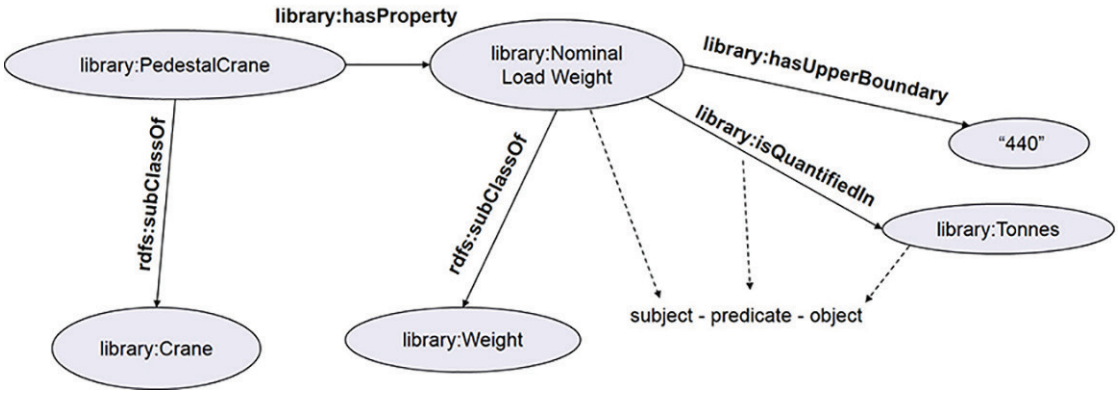


Figure 5 — RDF Example of a specification of a property of a crane

EXAMPLE 4 Figure 6 shows an example of a set of graphs that represents a set of statements about the specification of a property "nominal load weight" of a specific pedestal crane ("deck crane B710" which is an individual) as an instantiation of a typical pedestal crane. The instances are defined in the namespace "myproject:", the classes are defined in the namespace "library:". The statements represented by Figure 6 are:

— "deck crane B710" is an instance of a "pedestal crane";

— "deck crane B710" has a property "nominal load weight deck crane B710";

— "nominal load weight deck crane B710"is an instance of "normal load weight";

— "nominal load weight deck crane B710" is quantified in "tonnes";

— "nominal load weight deck crane B710" has a magnitude of "400".

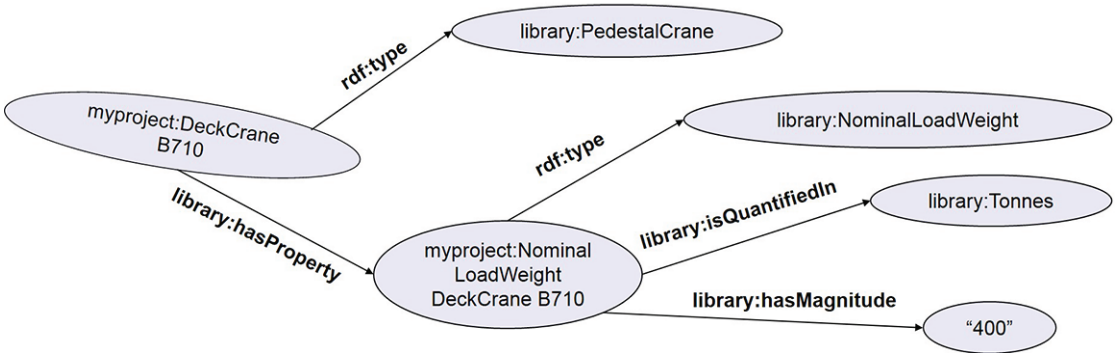


Figure 6 — RDF Example of an instantiation of a "nominal weight" property as defined in Figure 5

NOTE 2 Application software can check if the magnitude of "400" as used in Figure 6 fits in the given upper boundary of "440" defined in the typical of a "Pedestal Crane" as defined in Figure 5.

4.6 RDF Named Graph

Named Graphs are a key concept of Semantic Web architecture in which a set of Resource Description Framework (RDF triples) statements (a graph) are identified using a unique URI. So a statement can be optionally explicit accompanied with additional information. This is necessary to be able to pinpoint the characteristic, context or metadata of a statement.

EXAMPLE 1 An example of information explicit accompanied with a statement is the intention of that statement which states that the statement is required, proposed or approved.

Named Graphs are an easy enhancement of the abstract RDF syntax. Named Graphs enables us to talk about RDF graphs using RDF statements (in other words: allows making statement about statements).

© ISO 2015 – All rights reserved

AVA Documents Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

The meta-data of a statement, e.g. source, modifier, modified, context, can be expressed in triples, each belonging to that statement. It is needed to be able to say that these extra triple belongs uniquely to the triple that represents the statement. Therefore the W3C version of RDF named graphs is used in this part. By putting the triple of a "main" statement in a RDF named graph, as many additional triples as needed can point to the first triple, representing metadata.

EXAMPLE 2 A specific statement can define the cardinality of the object that is contained in another specific statement.

EXAMPLE 3 A specific statement can define the certainty of a property value that is defined as the magnitude of a property in another specific statement.

The concept of RDF Named Graphs offers flexibility in modelling products and plants. Also this concept provides the possibility to represent any work or product process in a graphical manner so that it becomes easier to extract required predicates (equal to a relationship). This method has been applied to ISO/IEC 15288 process to define statements in subject, predicate and object so that it becomes possible to bring in systems engineering aspect into the ISO 15926 world.

EXAMPLE 4 Figure 7 shows an example with three Named Graphs that are representing three statements given in Figure 6. The first Named Graph states that DeckCraneB710 is an instance of a "PedestalCrane". The second Named Graph states that DeckCraneB710 has a property "NominalLoadWeightDeckCraneB710" and the third Named Graph states that the magnitude of this property is equal to "400". Each triple is accompanied with metadata such as "isCreated by", "isCreated at" and "isModifiedAt".

NOTE For reason of readability, Named Graphs in the examples used in this part of ISO 15926 have logical names and not a formal UIDD.

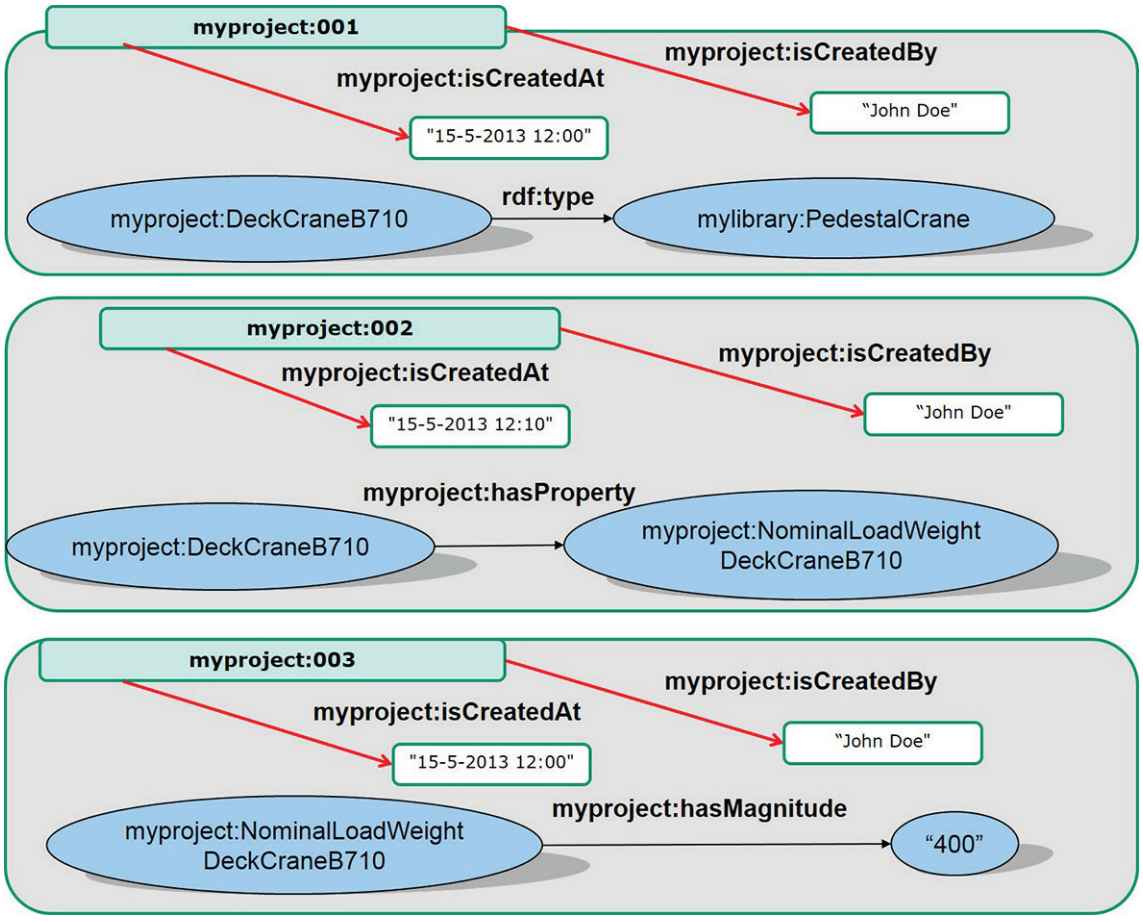


Figure 7 — Named Graph principle applied on three triples taken from Figure 6

In Table 1, the Named Graphs shown in Figure 7 are captured in the N-Quad format of W3C.

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

Table 1 — W3C N-Quad representation of Named Graphs

Triple			
Subject	**Predicate**	**Object**	**UID Named Graph**
myproject:DeckCraneB710	rdf:type	library:PedestalCrane	myproject:001
myproject:001	library: isCreatedBy	"John Doe"	myproject:001
myproject:001	library: isCreatedAt	"15-5-2013 12:00"	myproject:001
myproject:DeckCraneB710	library: hasProperty	myproject: NominalLoadWeightDeckCraneB710	myproject:002
myproject:002	library: isCreatedBy	"John Doe"	myproject:002
myproject:002	library: isCreatedAt	"15-5-2013 12:11"	myproject:002
myproject: NominalLoadWeightDeckCraneB710	library: hasMagnitude	"400"	myproject.003
myproject:003	library: isCreatedBy	"John Doe"	myproject.003
myproject:003	library: isCreatedAt	"15-5-2013 12:15"	myproject.003

4.7 Connecting RDF with a Reference Data Library (RDL)

An essential part of the methodology is identifying reference data items in the context on the application area of ISO 15926 as well as that of Systems Engineering then to extend a managed set of existing RDLs. In order to build such a set of reference data items, from the RDF namespace this part of ISO 15926 uses:

— rdf:type;

— rdf:Property;

— rdfs:Class;

— rdfs:subClassOf;

— rdfs:subPropertyOf.

The relationship "is a specialization of" is within this part of ISO 15926 identical to "rdfs:subClassOf", the relationship "is an instance of" is within this part of ISO 15926 identical to "rdf:type".

To be able to use ISO/TS 15926-4 in combination with this part of ISO 15926 in the context of a RDF environment, there is a class "thing" defined as a rdf:type of rdfs:Class. In a simplified way, ISO 15926-2 "thing" can be seen as the root classes for all object classes of this part of ISO 15926 (see Figure 8). The root classes of this part of ISO 15926 are specialized in Figure 8 to sub classes in order to describe the information models as shown in Clause 6.

Figure 8 shows how the root element "thing" is a generalization of an initial set of basic classes, known by this part of ISO 15926 which are derived from ISO 15926-2 entities which on their turn refer to classes within the RDL ISO/TS 15926-4.

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

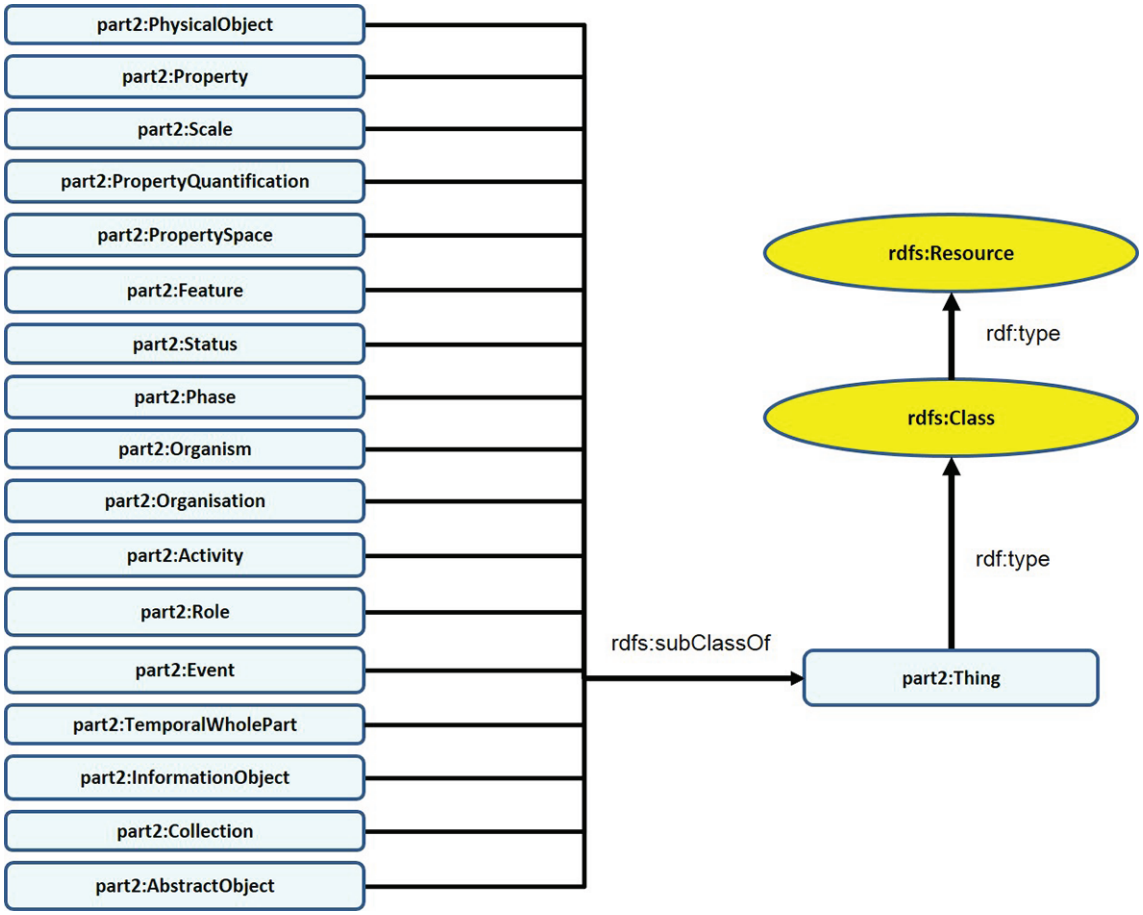


Figure 8 — Expanding RDF with basic classes of an RDL by mapping rdfs:class to part2:thing

The methodology described in this part allows defining private classes as specializations of classes in the Reference Data Library. These specializations then are part of the product, project and or process model and refer to a class in the Reference Data Library by means of the UID of the applicable class within ISO/TS 15926-4.

EXAMPLE Figure 9 shows an example of how an individual (instance of a RDL class) is related to rdfs:Resource.

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

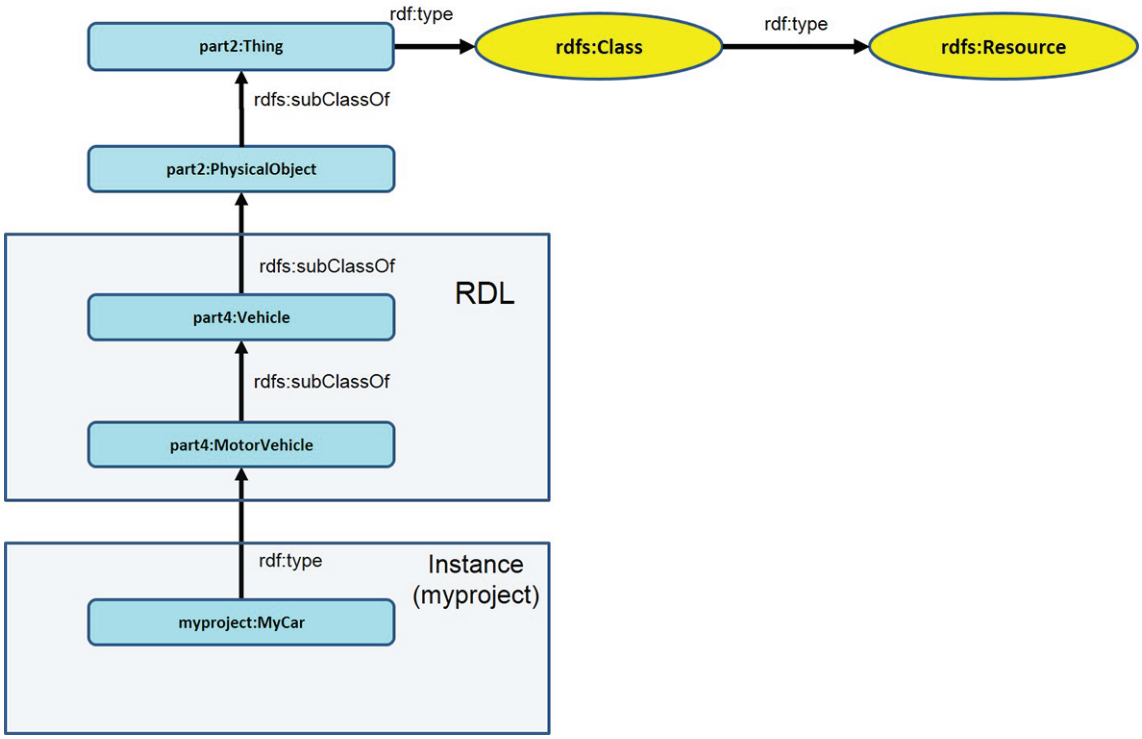


Figure 9 — Example of how an individual "myproject:MyCar" being an instance of a motor vehicle as defined in the library ISO/TS 15926-4 is related to rdfs:Resource

4.8 Use of RDF with a RDL of relationships

To expand RDF within this part of ISO 15926, a reference data library of relationships is incorporated. The root of this reference data library of relationships is "part11:relationship" which is defined as a rdf:type of rdf:Property. All relationships within the initial set of this part of ISO 15926 are a rdfs:subPropertyOf of part11:relationship.

© ISO 2015 – All rights reserved

Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015

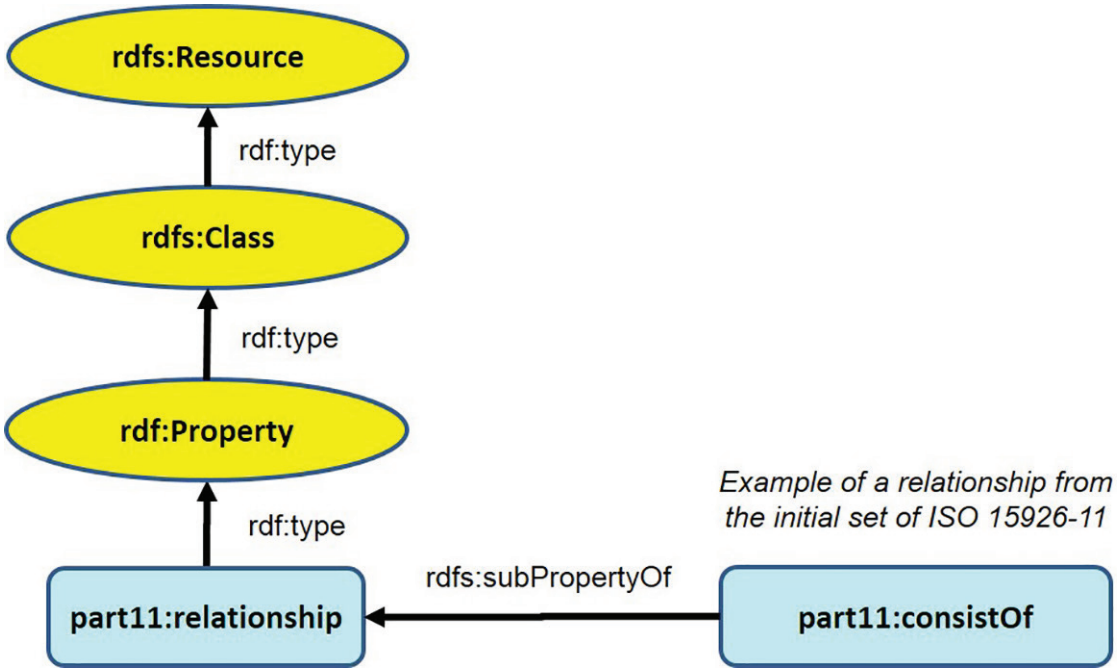


Figure 10 — Expanding RDF with a defined set of relationships with root element part11:relationship

There are two kinds of relationships defined in this part of ISO 15926:

— relationships in the context of making statements about Systems Engineering data;

EXAMPLE 1 "Objective A is threatened by risk B" is a statement in the context of Systems Engineering.

— relationships in order to make statements about statements (metadata).

EXAMPLE 2 "Statement A is created by person B" is a statement about a statement.

Both kinds of relationships are defined in the initial set of relationships as given in Annex A.

Rules:

— when statements are exchanged in the supply chain, only relationships in the prescribed direction shall be used. The inverse name of the relationship shall only be used in end-user application combined by changing the subject and object from position in the statement;

— when implementing this part of ISO 15926, each relationship can be specialized by means of domain and range relationships in order to select the right set of objects (on class level or on instance level) to connect with (see as example Figure 21).

By implementing this functionality within a configuration management environment will improve the semantic quality of statements and thus of information modelling.

NOTE For "part11:relationship" the same definition is valid as the entity "relationship" defined in ISO 15926-2.

5 Methodology for using Named Graphs

5.1 Building constructs of the methodology

In this clause, a semantic modelling methodology is described at logical level, consisting of a set of rules allowing users to combine RDF triples, RDF Named Graphs, set of relationships and RDL classes to build

© ISO 2015 – All rights reserved
Documents
Document Sharing Hub
Full document details: PD ISO/TS 15926-11:2015