


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. E	FEDERAL SUPPLY CLASS 4720	
	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE G-3, AEROSPACE COUPLINGS, FITTINGS, HOSE, TUBING ASSEMBLIES COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.	
AS1633™	SAE values your input. To provide feedback on this Technical Report, please visit http://standards.sae.org/AS1633E THIRD ANGLE PROJECTION 	
CUSTODIAN: G-3/G-3D		PROCUREMENT SPECIFICATION: AS620 /2/
	AEROSPACE STANDARD HOSE ASSEMBLY, CONVOLUTED, POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED CONDUCTIVE, FLARELESS, STRAIGHT TO STRAIGHT	AS1633™ REV. E Documents

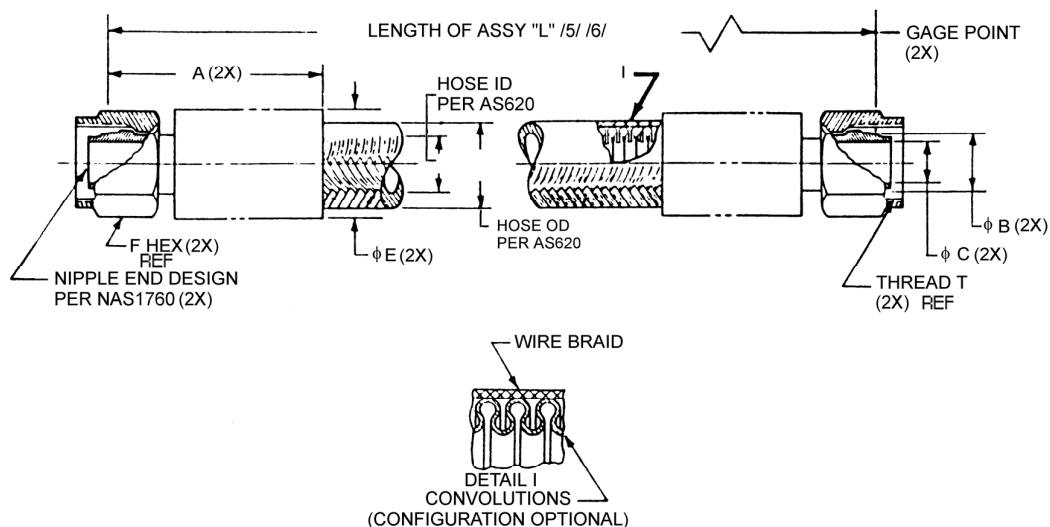


FIGURE 1 - HOSE ASSEMBLY

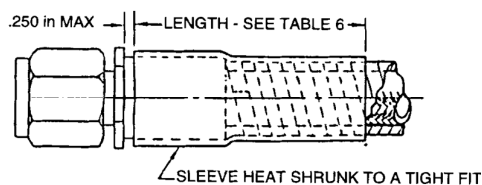


FIGURE 2 - SPIRAL AND POYESTER ABRASION COVER /7/, /8/

TABLE 1 - ASSEMBLY DIMENSIONS

HOSE ASSEMBLY AS1633 SIZE CODE	HOSE ASSEMBLY SIZE REF	THREAD T PER AS8879 REF	A MAX	Ø B GAGE BASIC	Ø C /9/ MIN	Ø E /10/ MAX WITHOUT SLEEVEING	F HEX REF
04	.250	.4375-20 UNJF-3B	1.26	.2930	.132	.55	.56
06	.375	.5625-18 UNJF-3B	1.34	.4120	.256	.68	.69
08	.500	.7500-16 UNJF-3B	1.52	.5600	.345	.86	.88
10	.625	.8750-14 UNJF-3B	1.71	.6730	.430	.95	1.00
12	.750	1.0625-12 UNJ -3B	1.89	.8100	.635	1.28	1.25
16	1.000	1.3125-12 UNJ -3B	2.00	1.0620	.835	1.47	1.50
20	1.250	1.6250-12 UNJ -3B	2.53	1.3160	1.085	1.70	1.81
24	1.500	1.8750-12 UNJ -3B	2.69	1.5650	1.310	2.00	2.12
32	2.000	2.5000-12 UNJ -3B	3.40	2.0680	1.780	2.56	2.75



AEROSPACE STANDARD

HOSE ASSEMBLY, CONVOLUTED,
POLYTETRAFLUOROETHYLENE, METALLIC REINFORCED
CONDUCTIVE, FLARELESS, STRAIGHT TO STRAIGHT

AS1633™
SHEET 1 OF 5

REV.



Documents

Document Sharing Hub