

FED. SUPPLY CLASS

5930

NAS PART NUMBER TO
BE RUBBER STAMPED

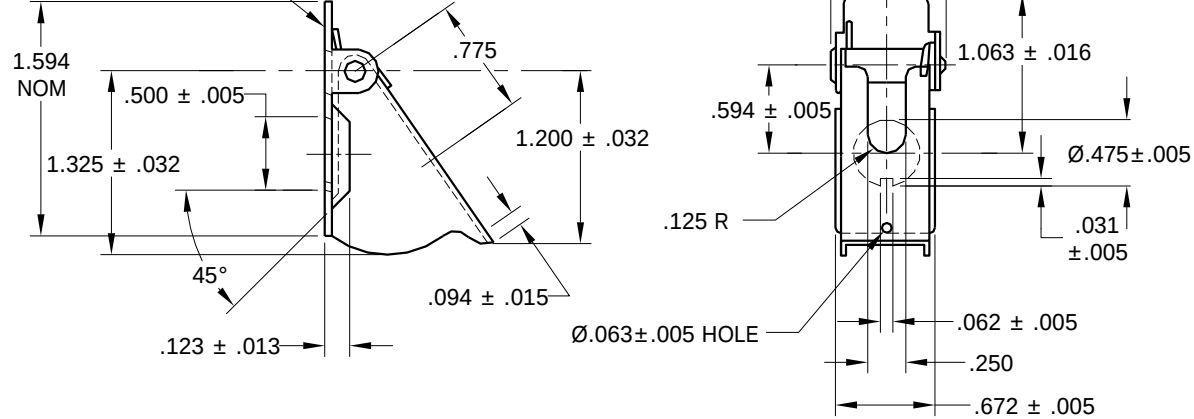


TABLE I – WEIGHT

PART NUMBER	WEIGHT
NAS1073-1	.042 LBF MAX

MATERIAL:

STEEL, COMMERCIAL; MUST BE SMOOTH AND FREE FROM BURRS.

FINISH:

- ③ ZINC PLATE PER SPECIFICATION ASTM B633, CLASS Fe/Zn 5, TYPE IV, AND BLACK ENAMEL PER MASTER PAINTERS INSTITUTE, REFERENCE #9 AND #94, EXCEPT COVER SHALL BE DULL RED ENAMEL.

EXAMPLE OF PART NUMBER:

- ③ NAS1073-1 = A SWITCH GUARD FOR TWO-POSITION TOGGLE SWITCHES TO LOCK THE TOGGLE LEVER IN THE EXTREME POSITION OPPOSITE THE SWITCH KEYWAY.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

REVISION DATE: MAY 31, 2016

ISSUE DATE: JUNE 1957

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 3
PROCUREMENT SPECIFICATION MIL-DTL-7703	TITLE GUARD, TWO-POSITION, TOGGLE-SWITCH, LOCK	CLASSIFICATION PART STANDARD NAS1073
		SHEET 1 OF 2



Documents
SHEET 1 OF 2

Document Sharing Hub

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (3) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (4) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (5) REMOVE ALL BURRS AND SHARP EDGES.
- (6) THIS GUARD IS INTENDED TO PREVENT INADVERTENT ACTUATION OF TWO-POSITION TOGGLE SWITCHES.
- (7) THE COVER SHALL REMAIN IN ONLY THE CLOSED POSITION.
- (8) OPENING THE GUARD SHALL NOT CHANGE THE POSITION OF THE TOGGLE LEVER.
- (9) TOLERANCES UNLESS OTHERWISE SPECIFIED, DECIMALS $\pm .010$, ANGLES ± 10 DEGREES.
- ③ (10) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1982.

REVISION

3

NAS1073

SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY
CONFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
ITEMS FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY OF PATENT OR TRADEMARK RIGHTS.
Copyright Aerospace Industries Association of America, Inc. Provided by IHS Market under license with AIA/NAS. No reproduction or networking permitted without license from IHS. Not for Resale.