


FED. SUPPLY CLASS

5340

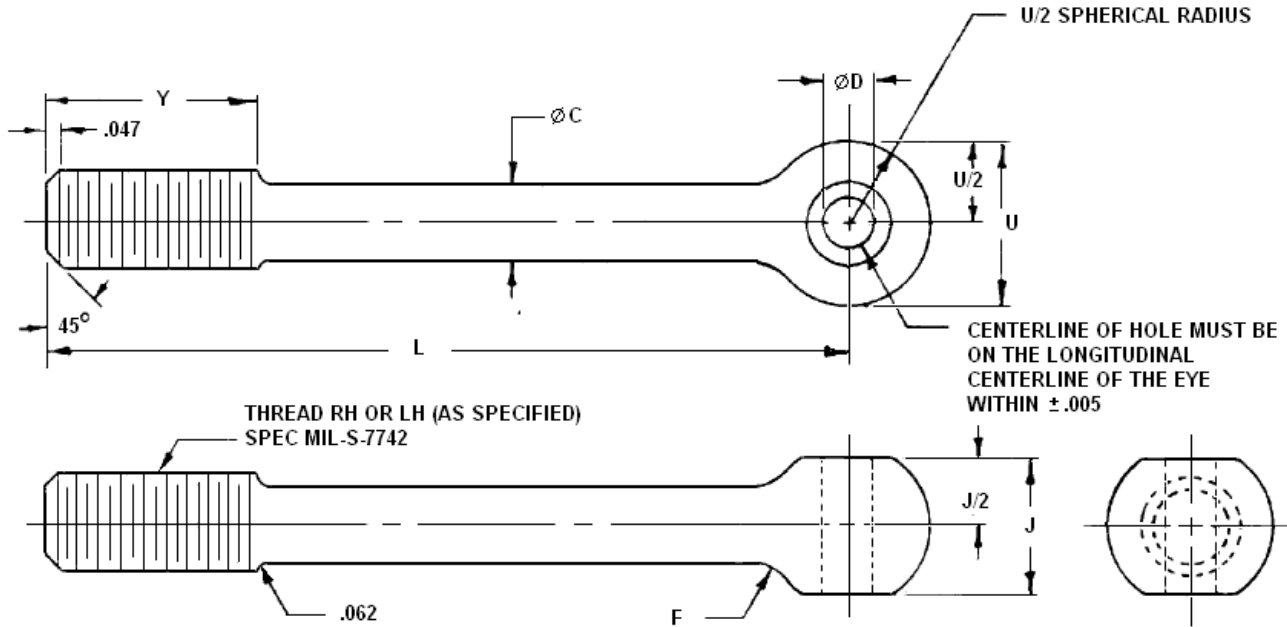

DASH NO	MIN STR TERM	THR'D UNF-3A	ØC +.006 -.000	ØD ±.002	F RAD	J +.000 -.003	L +.030 -.000	U +.010 -.000	Y +.030 -.000	WT LBS (REF)	USED WITH ASA CHAIN NO. OR EQ
25	1600	.190-32	.133	.094	.15	.186	1.600	.230	.500	.008	25 & 516 (a)
35	2200	.250-28	.155	.144	.15	.293	1.700	.340	.600	.015	35 & 195 (b)
41	2200	.250-28	.155	.144	.20	.355	1.700	.410	.600	.019	41
40	4600	.312-24	.243	.159	.20	.436	1.900	.500	.750	.040	40
50	8000	.375-24	.306	.203	.25	.540	2.900	.620	.900	.070	50
N50	8000	.375-24	.306	.203	.30	.415	2.900	.560	.900	.068	N50

(a) SIMILAR TO BRITISH CHAIN (8MM)

(b) BALDWIN-DUCKWORTH CHAIN

CODE: ③ DASH NUMBERS LISTED ARE FOR CARBON STEEL TURNBUCKLE EYES.

PART NUMBER CODE: DASH NUMBERS LISTED ARE FOR CARBON AND CORROSION RESISTANT STEELS. ADD "C" BEFORE DASH NUMBER FOR CORROSION RESISTANT STEEL.

EXAMPLE:

NAS288 - 35 - LH

NAS288 C 35 - LH

③ LH THREADS
TERMINAL FOR #35 CHAIN
CARBON STEEL

③ LH THREADS
TERMINAL FOR #35 CHAIN
CORROSION RESISTANT STEEL

INACTIVE FOR DESIGN AFTER OCTOBER 15, 1993. NO SUPERSEDING STANDARD. FOR DESCRIPTION OF STATUS NOTES SEE NAS380.

AEROSPACE INDUSTRIES ASSOCIATION OF AMERICA, INC.
1000 WILSON BLVD.
ARLINGTON, VA 22209

THIS DRAWING SUPERSEDES ALL ANTECEDENT STANDARD DRAWINGS FOR THE SAME
PRODUCT AND SHALL BECOME EFFECTIVE NO LATER THAN SIX MONTHS FROM THE LAST
REVISION DATE.

REVISION DATE: AUGUST 31, 2010

ISSUE DATE: MAY 1945

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 3
③ PROCUREMENT SPECIFICATION MIL-DTL-8878	TITLE TERMINAL - CHAIN TO TURNBUCKLE	CLASSIFICATION PART STANDARD NAS288 SHEET 1 OF 2

MATERIAL: STEEL IN ACCORDANCE WITH MIL-T-5685 MIL-DTL-8878

TENSILE STRENGTH: 125,000 P.S.I. MIN. (3)

FINISH: (3) IN ACCORDANCE WITH MIL-T-5685 MIL-DTL-8878.

TOLERANCE: DIMENSIONS ARE IN INCHES. DECIMALS $\pm .010$, ANGLES $\pm 3^\circ$, UNLESS OTHERWISE SPECIFIED.

ENG. REFERENCE: THIS DRAWING AND SPECIFICATION MIL-T-5685 MIL-DTL-8878 COMPLEMENT ONE ANOTHER, AND, TOGETHER COMPLETELY DEFINE THIS PRODUCT. (3)

NOTES:

(3)

- (1) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (2) REMOVE ALL BURRS AND SHARP EDGES.
- (3) REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.

REVISION

3

NAS288
SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS OR APPLICATION OR (2) THE EXISTENCE OF OR APPLIC Not for Resale, 01/04/2016 22:38:01 MST TRADEMARKS RIGHTS.