

FED. SUPPLY CLASS

5340

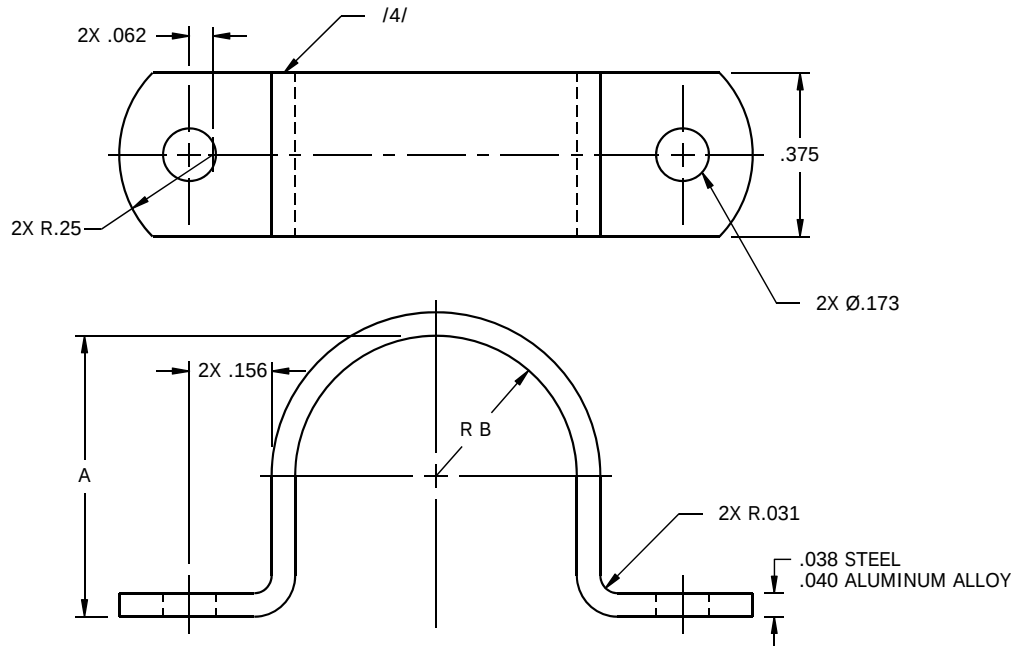



TABLE I – DIMENSIONS

DASH NUMBER		NOMINAL TUBE SIZE	A	B RADIUS
STEEL	ALUMINUM			
1	2	.125	.109	.062
3	4	.188	.172	.094
5	6	.250	.234	.125
7	8	.312	.297	.156
9	10	.375	.359	.188
11	12	.438	.422	.219
13	14	.500	.484	.250
15	16	.562	.547	.281
17	18	.625	.609	.312
19	20	.688	.672	.344
21	22	.750	.734	.375
23	24	.812	.797	.406
25	26	.875	.859	.438
27	28	.938	.922	.469
29	30	1.000	.984	.500
31	32	1.250	1.234	.625
33	34	1.500	1.484	.750
35	36	1.750	1.734	.875
37	38	2.000	1.984	1.000

③ COMPLETELY REVISED

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21315, REVISION A. PART NUMBERS REMAIN MS21315.

THIRD
ANGLE
PROJECTION



CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION

3

PROCUREMENT
SPECIFICATION

NASM760

TITLE

**STRAP, RETAINING, TWO HOLE,
FOR TUBING**

CLASSIFICATION
PART STANDARD

NASM21315
SHEET 1 OF 2

MATERIAL:

CARBON STEEL, SHEET OR STRIP, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
ALUMINUM ALLOY, PLATE OR SHEET, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

FINISH:

STEEL: CADMIUM PLATE IN ACCORDANCE WITH AMS-QQ-P-416, TYPE II, CLASS 3.
ALUMINUM: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE II, CLASS 1.

EXAMPLE OF PART NUMBER:

MS21315 - 1 = STRAP, STEEL, CADMIUM PLATED, .125 NOMINAL TUBE SIZE.
DASH NUMBER FROM TABLE I
BASIC MS NUMBER

NOTES:

- (1) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (2) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (3) REMOVE ALL BURRS AND SHARP EDGES, .010 RADIUS MAXIMUM.
- (4) INSIDE EDGES SHALL BE ROLLED.
- (5) RETAINING STRAP SHALL BE TYPE III, STYLE A OR STYLE B, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
- (6) DIMENSIONS IN INCHES.
- (7) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS $\pm .010$.
- (8) DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (9) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
- (10) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.

③ COMPLETELY REVISED

REVISION

3

NAS Documents

SHEET 2



Document Sharing Hub

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY

Copyright Aerospace Industries Association of America Inc. MS PRODUCED UNDER NATIONAL AEROSPACE STANDARD: AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF
Provided by IHS under license with AIA/NAS. ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLIC Licensee= www.sepana.ir/5991803002, User=sam, albert
No reproduction or networking permitted without license from IHS. Not for Resale, 01/04/2016 15:52:10 MST TRADEMARKS RIGHTS.

Full document details: AIA NASM21315 2011