

FED. SUPPLY CLASS

5340

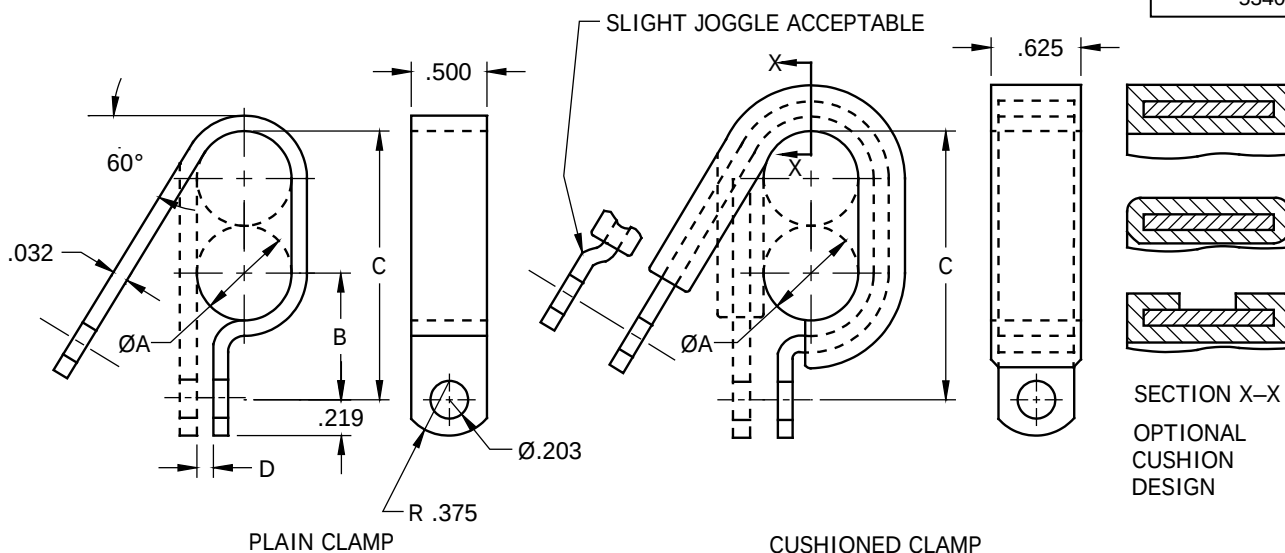


TABLE I – DASH NUMBERS AND DIMENSIONS

DASH NUMBER		ØA NOM	B		C		D
PLAIN	CUSHIONED		PLAIN	CUSHIONED	PLAIN	CUSHIONED	
1	22	.125	.344	.406	.531	.594	.062
2	23	.188	.375	.438	.637	.719	
3	24	.250	.406	.469	.781	.844	
4	25	.312	.438	.500	.906	.969	
5	26	.375	.469	.531	1.031	1.094	
6	27	.438	.500	.562	1.157	1.219	
7	28	.500	.531	.594	1.281	1.344	
8	29	.562	.562	.625	1.404	1.469	
9	30	.625	.594	.656	1.531	1.594	
10	31	.688	.625	.688	1.657	1.719	
11	32	.750	.656	.719	1.761	1.844	.094
12	33	.875	.719	.781	2.031	2.094	
13	34	1.000	.781	.844	2.281	2.344	
14	35	1.125	.844	.906	2.531	2.594	
15	36	1.250	.906	.969	2.761	2.844	
16	37	1.375	.969	1.031	3.031	3.094	
17	38	1.500	1.031	1.094	3.281	3.344	
18	39	1.625	1.094	1.156	3.531	3.594	
19	40	1.750	1.156	1.219	3.761	3.844	
20	41	1.875	1.219	1.281	4.031	4.094	
21	42	2.000	1.261	1.344	4.251	4.344	

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MS21334, REVISION B. PART NUMBERS REMAIN MS21334.

THIRD
ANGLE
PROJECTION

CUSTODIAN
NATIONAL AEROSPACE STANDARDS COMMITTEE

REVISION
2

PROCUREMENT
SPECIFICATION

TITLE

CLASSIFICATION
PART STANDARD

NONE

**CLAMP, LOOP, DOUBLE, CABLE OR TUBE,
STEEL, PLAIN AND CUSHIONED**

MS21334

SHEET 1 OF 2



Document Sharing Hub

MATERIAL:

- BASE - STEEL, CARBON IN ACCORDANCE WITH ~~FED. STD. NO. 66~~ AIR 4127, AISI 1005 THRU AISI 1020. TEMPER HALF-HARD, QUARTER-HARD, SKIN-PASSED OR DEAD-SOFT.
- CUSHION - SYNTHETIC RUBBER IN ACCORDANCE WITH ~~MIL-R-3065~~ GRADE SC515 A-B₁-E₃-F₂
ASTM D2000 BC515 A14 B24 EO34 F19OR PLASTISOL IN ACCORDANCE WITH ~~MIL-P-20689~~
A-A-59464, 0.062 THICK.

FINISH:

- STEEL - CADMIUM PLATED IN ACCORDANCE WITH AMS-QQ-P-416, TYPE II, CLASS 3,
OR ZINC COATED IN ACCORDANCE WITH ASTM B633, Fe/Zn 5, TYPE II.

CODE:

THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS21334-1.

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- ② (3) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (4) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (5) REMOVE ALL BURRS AND SHARP EDGES, R .010 MAX.
- (6) TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS ± .010; ANGLES ± 5°.
- (7) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

REVISION

2

NAS **ASM21334**

SHEET 2

Document Sharing Hub