

FED. SUPPLY CLASS

5310

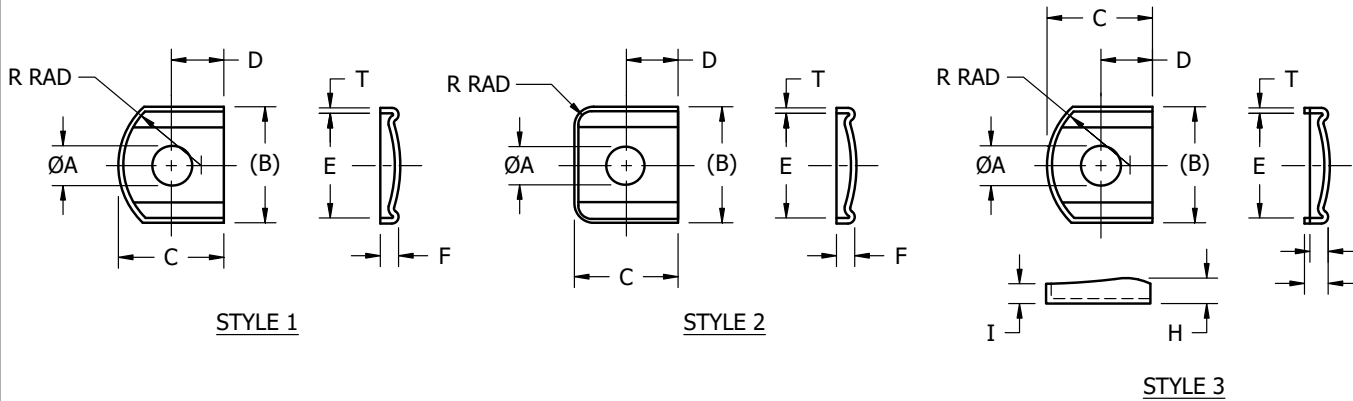


TABLE I – DASH NUMBERS AND DIMENSIONS

DASH NUMBER	STYLE	ØA ID ±.016	(B)	C ±.016	D ±.016	E ±.016	F ±.016	G ±.016	H ±.016	I ±.016	T THICKNESS ±.005	R RAD ±.016
01	1	.128	.578	.516	.250	.516	.094	–	–	–	.025	.406
02		.140	.578	.516	.250	.516	.094	–	–	–	.025	.406
03		.167	.578	.516	.250	.516	.094	–	–	–	.025	.406
04		.191	.578	.516	.250	.516	.094	–	–	–	.025	.406
05	2	.128	.422	.406	.200	.391	.094	–	–	–	.020	.094
06		.140	.422	.406	.200	.391	.094	–	–	–	.020	.094
07		.167	.422	.406	.200	.391	.094	–	–	–	.020	.094
08	3	.128	.578	.516	.250	.516	.125	.094	.125	.094	.025	.406
09		.140	.578	.516	.250	.516	.125	.094	.125	.094	.025	.406
10		.167	.578	.516	.250	.516	.125	.094	.125	.094	.025	.406
11		.191	.578	.516	.250	.516	.125	.094	.125	.094	.025	.406

MATERIAL:

ALUMINUM ALLOY, 2024-T4 (UNS A92024) OR 7075-T6 (UNS A97075).

FINISH:

ANODIZED.

THE INITIAL RELEASE OF THIS DOCUMENT SUPERSEDES MIL-W-45595/5. PART NUMBERS REMAIN M45595/5.

THIRD ANGLE PROJECTION	CUSTODIAN NATIONAL AEROSPACE STANDARDS COMMITTEE	REVISION 2
PROCUREMENT SPECIFICATION NASM45595	TITLE WASHER, SADDLE, ALUMINUM ALLOY	CLASSIFICATION PART STANDARD NASM45595/5

USE OF OR RELIANCE UPON THIS DOCUMENT OR ANY NATIONAL AEROSPACE STANDARD IS ENTIRELY VOLUNTARY. AIA DOES NOT QUALIFY SUPPLIERS OR CERTIFY THE PERFORMANCE OF ITEMS PRODUCED UNDER NATIONAL AEROSPACE STANDARDS. AIA MAKES NO REPRESENTATION OR CLAIM RESPECTING (1) THE SUITABILITY OF THE DOCUMENT FOR ANY PARTICULAR APPLICATION OR (2) THE EXISTENCE OF OR APPLICABILITY OF PATENT OR TRADEMARKS RIGHTS.

CODE:

THE PART NUMBER CONSISTS OF THE LETTER "M" AND THE BASIC PART NUMBER, FOLLOWED BY A NUMBER AND A STYLE CODE NUMBER TAKEN FROM TABLE I.

EXAMPLE OF PART NUMBER:

M45595/5-01 = WASHER, SADDLE, ALUMINUM ALLOY; INSIDE DIAMETER .128; THICKNESS .025; ANODIZED

└─── DASH NUMBER

└─── BASIC PART NUMBER

NOTES:

- (1) DIMENSIONS IN INCHES AND APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.
- (2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- (3) UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.
- (4) UNLESS OTHERWISE SPECIFIED HEREIN, REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF MANUFACTURE. HOWEVER, EXISTING MATERIAL INVENTORY CERTIFIED TO A PREVIOUS REVISION OF THE APPLICABLE MATERIAL SPECIFICATION(S) IS ACCEPTABLE FOR USE UNTIL DEPLETION.
- (5) DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.

REVISION

2

NASM45595/5

SHEET 2