



BSI Standards Publication

Gaseous hydrogen — Fuelling stations

Part 7: Rubber O-rings

National foreword

This British Standard is the UK implementation of ISO 19880-7:2025.

The UK participation in its preparation was entrusted to Technical Committee GSE/6.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

© The British Standards Institution 2025
Published by BSI Standards Limited 2025

ISBN 978 0 539 19429 6

ICS 43.060.40; 71.100.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2025.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------



**International
Standard**

ISO 19880-7

**Gaseous hydrogen — Fuelling
stations —**

**Part 7:
Rubber O-rings**

*Carburant d'hydrogène gazeux — Stations-service —
Partie 7: Joints toriques en caoutchouc*

**First edition
2025-08**

Reference number
ISO 19880-7:2025(en)

© ISO 2025  **Documents**
Document Sharing Hub



COPYRIGHT PROTECTED DOCUMENT

© ISO 2025

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Inside diameters, cross-section diameters and tolerances	2
4.1 Configuration	2
4.2 Inside diameters, d_1 , cross-section diameter, d_2 , and tolerances	3
4.3 Methods of measuring for receiving inspection	3
5 Housing dimensions	3
5.1 O-ring housings	3
5.2 Requirements	3
5.2.1 Housing dimensions	3
5.2.2 Determining O-ring size for custom housing dimensions	3
5.2.3 Determining housing fill in design of housing	4
5.2.4 Determining temperature in design of housings	4
6 Inspection and quality acceptance criteria	4
7 Anti-extrusion rings (back-up rings)	4
8 Specification of rubber materials	4
8.1 Rubber materials	4
8.2 Curing systems	5
8.3 O-ring requirements	5
8.4 Detailed requirements of O-ring materials	7
9 Designation system	17
9.1 General	17
9.2 Designation codes	17
9.3 Identification statement	18
10 Instruction manual	18
10.1 General	18
10.2 Verification prior to use	18
Annex A (normative) Exposure test in hydrogen gas	19
Annex B (normative) Criteria for appearance of exposed test pieces	21
Annex C (informative) O-ring stress/strain and compression set testing	22
Bibliography	23

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement. For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 197, *Hydrogen technologies*.

A list of all parts in the ISO 19880 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Gaseous hydrogen — Fuelling stations —

Part 7: Rubber O-rings

1 Scope

This document specifies the requirements for rubber O-rings and their housing dimensions, which seal gaseous hydrogen, in high-pressure hydrogen devices for gaseous hydrogen fuelling stations, such as valves, filters, joints, breakaways and other such devices. This document is applicable to O-rings suitable for sealing hydrogen gas of up to 70 MPa nominal working pressure, in the operating temperature range of $-40\text{ }^{\circ}\text{C}$ to $65\text{ }^{\circ}\text{C}$.

This document contains safety requirements for the design of O-rings and their housing dimensions, compound design, and test methods for seal systems. This document applies to newly manufactured O-rings for hydrogen gas seal in high-pressure hydrogen devices used in hydrogen fuelling stations.

NOTE 1 This document was developed using the ISO 3601 series.

NOTE 2 This document was developed based on several temperature classes of rubber O-rings suitable for use with high-pressure hydrogen seals in devices for gaseous hydrogen stations.

NOTE 3 The operating temperature is not a temperature of the hydrogen gas to be sealed by the O-ring gas seal system. Regardless of the operating temperature, the hydrogen gas temperature to be sealed can rise up to $180\text{ }^{\circ}\text{C}$.

NOTE 4 The O-ring seal system for the high-pressure hydrogen devices are designed by the device manufacturers. The detailed specifications of the O-rings and design of static or non-static high-pressure hydrogen seal systems for the high-pressure hydrogen devices are determined as agreed upon between the interested parties by referring to this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 37, *Rubber, vulcanized or thermoplastic — Determination of tensile stress-strain properties*

ISO 48-2:2018, *Rubber, vulcanized or thermoplastic — Determination of hardness — Part 2: Hardness between 10 IRHD and 100 IRHD*

ISO 188, *Rubber, vulcanized or thermoplastic — Accelerated ageing and heat resistance tests*

ISO 815-1:2019, *Rubber, vulcanized or thermoplastic — Determination of compression set — Part 1: At ambient or elevated temperatures*

ISO 1382, *Rubber — Vocabulary*

ISO 1629, *Rubber and latices — Nomenclature*

ISO 2921, *Rubber, vulcanized — Determination of low-temperature characteristics — Temperature-retraction procedure (TR test)*

ISO 3601-1:2012, *Fluid power systems — O-rings — Part 1: Inside diameters, cross-sections, tolerances and designation codes*

ISO 3601-1, *Fluid power systems — O-rings — Part 1: Inside diameters, cross-sections, tolerances and designation codes*

ISO 3601-2:2016, *Fluid power systems — O-rings — Part 2: Housing dimensions for general applications*

ISO 3601-2, *Fluid power systems — O-rings — Part 2: Housing dimensions for general applications*

ISO 3601-3, *Fluid power systems — O-rings — Part 3: Quality acceptance criteria*

ISO 3601-4, *Fluid power systems — O-rings — Part 4: Anti-extrusion rings (back-up rings)*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 14687:2019, *Hydrogen fuel quality — Product specification*

ISO 18899, *Rubber — Guide to the calibration of test equipment*

ISO 19880-1, *Gaseous hydrogen — Fuelling stations — Part 1: General requirements*

ASTM D1414, *Standard Test Methods for Rubber O-Rings*

ASTM D1414-15, *Standard Test Methods for Rubber O-rings*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1382, ISO 5598 and ISO 19880-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

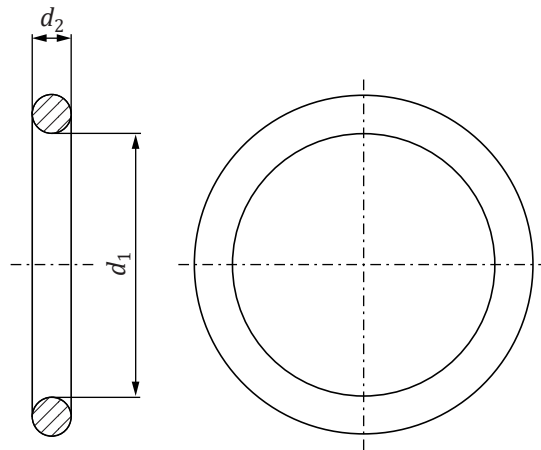
operating temperature

environmental temperature in which a device equipped with an O-ring gas seal system operates

4 Inside diameters, cross-section diameters and tolerances

4.1 Configuration

The shape of the O-ring shall be toroidal, as shown in [Figure 1](#).

**Key**

d_1	inside diameter
d_2	cross-section diameter

Figure 1 — Typical O-ring configuration**4.2 Inside diameters, d_1 , cross-section diameter, d_2 , and tolerances**

The typical combinations of inside diameters, d_1 , cross-section diameters, d_2 are shown in ISO 3601-1:2012, Tables 1 - 11. The inside diameter and cross-section diameter of O-rings for the high-pressure hydrogen devices are determined by reference to ISO 3601-1:2012, Tables 1 - 11.

4.3 Methods of measuring for receiving inspection

When it is necessary to inspect O-rings that conform to this document at the time of customer receipt, it is the responsibility of the interested parties to decide the inspection procedure. ISO 3601-1:2012, Annex B provides possible methods for such a procedure for information.

5 Housing dimensions**5.1 O-ring housings**

O-ring housing shall be designed in accordance with ISO 3601-2.

NOTE The applicable International Standard for each high-pressure hydrogen device provides the requirements for the performance of seal systems of the device that incorporates the O-ring and its housing.

Rubber O-rings are sometimes used as a sealing material for the joint of two high-pressure hydrogen devices. In this case, the two devices are joined via an O-ring, and it is necessary for the O-ring groove at the joint to conform to this document when completed. If the devices to be joined cannot be specified, i.e. if the state in which the O-ring groove is completed cannot be defined, it is outside the scope of this document.

5.2 Requirements**5.2.1 Housing dimensions**

Housing dimensions shall be designed in accordance with ISO 3601-2:2016, 6.1.

5.2.2 Determining O-ring size for custom housing dimensions

For hardware dimensions not listed in ISO 3601-2:2016, Tables 1 - 7, ISO 3601-2:2016, Annex B provides a procedure for identifying the proper O-ring for use in housings for specific hardware.