
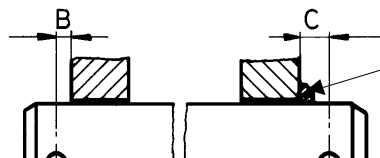


PERNI CON FORI PER COPIGLIE - LUNGHEZZA DEFINITA
DRILLED PINS FOR COTTER PINS - DEFINED LENGTH

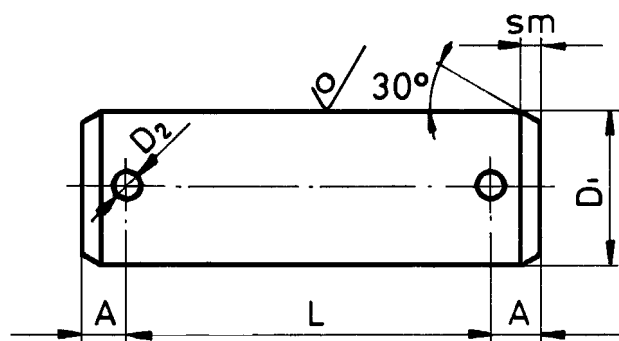

Rondella UNI 1750
Washer

Mat.: Trafilato h9 UNI 10233
C 40 Normalizzato

Mat.: Drawn h9 UNI 10233
C 40 Normalized

Es. di design.:

0.004348.R Perno con fori per copiglie

D = 40 h9; L = 100; d = 8
C 40 Norm. - N 7.100.121

Ex. of design.:

0.004348.R Drilled pin for cotter pins

D = 40 h9; L = 100; d = 8
C 40 Norm. - N 7.100.121

D ₁ h9	10	12	15	16	20	25	30	35	40	45	50	60	70	80	90	100
A	4,5	5,5	6	6	8	9	10	10	10	12	12	14	16	16	16	16
B	2,7	3,2	3,2	3,2	4	4,5	4,5	5,5	5,5	5,5	6,5	6,5	8	8	8	8
C	5,2	6,2	6,2	6,2	8	8,5	9,5	11,5	11,5	12,5	14,5	15,5	16,5	20	20	22
D ₂	3,2	3,2	4	4	5	6,3	8	8	8	10	10	10	13	13	13	13
sm	2	2	2	2	2	3	3	3	3	3	3	4	4	4	4	4
Mass Kg/m	0,62	0,89	1,39	1,58	2,47	3,85	6,31	7,55	9,86	12,5	15,4	22,2	30,4	39,5	49,9	61,1
Copiglia D	3,2	3,2	4	4	5	6,3	8	8	8	10	10	10	13	13	13	13
Cotter pin L	20	20	25	25	32	40	50	50	63	63	71	80	90	100	125	125

D		CODICE CODE							
h9		10	12	15	16	20	25	30	35
LUNGHEZZA LENGTH L	20	0.004271.P	0.004280.M						
	25	0.004272.Q	0.004281.A						
	30	0.004273.H	0.004282.B	0.004290.P	0.004298.K				
	35	0.004274.K	0.004283.C	0.004291.C	0.004299.L				
	40	0.004275.L	0.004284.D	0.004292.D	0.004300.S	0.004306.L	0.004314.B		
	45	0.004276.M	0.004285.E	0.004293.E	0.004301.N	0.004307.M	0.004315.C		
	50	0.004277.N	0.004286.F	0.004294.F	0.004302.P	0.004308.V	0.004316.D	0.004324.D	
	60	0.004278.W	0.004287.G	0.004295.G	0.004303.Q	0.004309.W	0.004317.E	0.004325.E	0.004334.F
	70	0.004279.X	0.004288.Q	0.004296.A	0.004304.H	0.004310.K	0.004318.N	0.004326.F	0.004335.G
	80	0.011971.R	0.004289.H	0.004297.B	0.004305.K	0.004311.F	0.004319.P	0.004327.G	0.004336.A
	90		0.011972.V	0.011974.X	0.011978.B	0.004312.G	0.004320.M	0.004328.Q	0.004337.B
	100		0.011973.W	0.011975.Z	0.011979.C	0.004313.A	0.004321.A	0.004329.H	0.004338.K
	110			0.011976.S	0.011980.S	0.011983.Q	0.004322.B	0.004330.P	0.004339.L
	120			0.011977.T	0.011981.N	0.011984.H	0.004323.C	0.004331.C	0.004340.Z
	130				0.011982.P	0.011985.K	0.011989.W	0.004332.D	0.004341.M
	140					0.011986.L	0.011990.R	0.004333.E	0.004342.N
	150					0.011987.M	0.011991.Q	0.011995.M	0.012000.F
	160					0.011988.V	0.011992.H	0.011996.N	0.004343.P
	180						0.011993.K	0.011997.P	0.012001.R
	200						0.011994.L	0.011998.X	0.012002.V
	220							0.011999.Z	0.012003.W
	240								0.012004.X
	260								0.012005.Z