

INTERNATIONAL STANDARD

ISO
10294-1

First edition
1996-12-15

Fire resistance tests — Fire dampers for air distribution systems —

Part 1: Test method

*Essais de résistance au feu — Clapets résistant au feu pour des systèmes
de distribution d'air —*

Partie 1: Méthode d'essai

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License number IHS/ICC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval system or otherwise, except as allowed in the copyright law of the country of use, or with the prior written consent of ISO (Case postale 56, 1211 Geneva 20, Switzerland, Fax +41 22 734 10 79), IHS or the ISO Licensor's members.



Reference number
ISO 10294-1:1996(E)
Documents



Document Sharing Hub

Contents		Page
1	Scope	1
2	Normative references	1
3	Definitions	2
4	Principles of test.....	2
5	Apparatus	3
6	Test construction.....	12
7	Determination of leakage of connecting duct and measuring station.....	16
8	Determination of leakage at ambient temperature	16
9	Fire test	17
10	Test report.....	18

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 10294-1 was prepared by Technical Committee ISO/TC 92, *Fire safety*, Subcommittee SC 2, *Fire resistance*.

Preparation of this test was necessary because of problems arising from the spread of fire and smoke in buildings through ventilation ducts and other openings in fire-separating walls and floors.

This test should be read in conjunction with ISO 834-1.

ISO 10294 consists of the following parts, under the general title *Fire resistance tests — Fire dampers for air distribution systems*:

- *Part 1: Test method*
- *Part 2: Classification, criteria and field of application of test results*
- *Part 3: Explanatory document*

Fire resistance tests — Fire dampers for air distribution systems —

Part 1:

Test method

SAFETY WARNING — In order that suitable precautions may be taken to safeguard health, the attention of all concerned in fire testing is drawn to the possibility that toxic or harmful gases may be evolved during the conduct of this test.

1 Scope

This part of ISO 10294 specifies a test method for the determination of the resistance of a fire damper to heat and the passage of smoke and gases at high temperatures.

The general purpose of the test is to evaluate the ability of a damper to prevent fire and smoke spreading from one fire compartment to another through an air distribution system.

NOTE — For classification, criteria and field of application of test results, see ISO 10294-2. For an explanatory document, see ISO 10294-3.

The test method described in this part of ISO 10294 is applicable to fire dampers. It is not intended to be used for dampers used only in smoke control systems.

The method is primarily intended for tests of mechanical devices.

Without modification it is not suitable for testing dampers in suspended ceilings.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 10294. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 10294 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 834-1:—¹⁾, *Fire resistance tests — Elements of building construction — Part 1: General requirements.*

ISO 5167-1:1991, *Measurement of fluid flow by means of pressure differential devices — Part 1: Orifice plates, nozzles and Venturi tubes inserted in circular cross-section conduits running full.*

1) To be published.

ISO 5221:1984, *Air distribution and air diffusion — Rules to methods of measuring airflow rate in an air handling duct*.

ISO 10294-2:—¹⁾, *Fire resistance tests — Fire dampers for air distribution systems — Part 2: Classification, criteria and field of application of test results*.

ISO 10294-3:—¹⁾, *Fire resistance tests — Fire dampers for air distribution systems — Part 3: Explanatory document*.

3 Definitions

For the purposes of this part of ISO 10294, the following definitions apply:

3.1 test construction: The complete assembly, consisting of the separating element, damper and duct sections and penetration seals (if any).

3.2 supporting construction: The wall, partition or floor into which the damper and duct section is installed for the test.

3.3 separating element: The wall, partition or floor into which the damper and duct is installed in the building.

3.4 connecting duct: The duct section between the damper or separating element and the measuring station.

3.5 measuring station: The equipment consisting of pipe system with an orifice plate or venturi and an air flow straightener (if any), installed between the connecting duct and the exhaust equipment to determine the volume flow rate of gases passing through the damper under test.

3.6 exhaust equipment: The equipment consisting of a fan and balancing or dilution dampers (if any), to apply and maintain the underpressure in the connecting duct.

3.7 fire damper: A mobile closure within a duct which is operated automatically or manually and is designed to prevent the passage of fire.

3.8 damper actuating mechanism: Mechanism, integral or directly associated with the damper which, when initiated by the damper triggering device, causes the movable component of the damper to change from the "open" to the "closed" position.

3.9 insulated damper: A damper which satisfies the integrity, leakage and insulation requirements of ISO 10294-2.

3.10 uninsulated damper: A damper which satisfies the integrity and leakage requirements of ISO 10294-2.

4 Principles of the test

The damper with its fixing device is built into, or attached directly to, or remotely via a section of ducting to, a fire-separating building element in a manner representative of practice. Tests are performed starting with the damper in the open position so as to expose the actuating mechanism of the damper to furnace conditions. Temperature and integrity measurements are carried out in various parts of the test construction during the test. The tightness of the damper system is measured by direct flow measurements whilst maintaining a constant pressure differential across the closed damper of 300 Pa. For special applications, higher underpressures may be employed. The tightness of the damper in the closed position is also measured at ambient temperature prior to the start of the furnace test.

1) To be published.

As the test conditions and tolerances for the beginning of the fire test are not specified in detail, the fire test enables only a limited assessment of the actuating mechanism to be carried out.

5 Apparatus

The test apparatus specified in 5.1 to 5.8, including the instrumentation, shall be in accordance with ISO 834-1 except where specifically stated otherwise.

An example of a test arrangement is shown in figure 1.

5.1 Furnace, capable of achieving the heating and pressure conditions specified in ISO 834-1.

The damper being tested shall be attached to the connecting duct in accordance with the manufacturers instructions. The connecting duct shall be of all welded construction fabricated from $(1,5 \pm 0,1)$ mm thick steel with a width and height appropriate to the size of the damper being tested. The duct shall have a length of $2 \times$ the diagonal dimension of the damper up to a maximum of 2 m. The connecting duct shall be provided with a gas-tight observation port.

5.2 Measuring station, consisting of an orifice plate, venturi, or other suitable device, an air flow straightener (if required) and straight lengths of pipe sized in accordance with ISO 5167-1 and ISO 5221 installed between the connecting duct and the exhaust fan to determine the volume flow rate of gases passing through the damper under test. When testing dampers installed in floors it is still possible to use the measuring station horizontally and a suitable mounting detail is shown in figure 2.

5.3 Exhaust fan system, capable of controlling flow rates and maintaining a pressure difference between the connecting duct and the furnace of the required pressure when the damper is closed.

Regardless of what test pressure is chosen the fan should be capable of achieving a 200 Pa pressure difference higher than the test pressure difference chosen for the test.

Regulation of the 300 Pa (or higher pressure differential) may be by means of a dilution damper installed just before the fan inlet. The pressure must be controlled to within $\pm 5\%$ of the required pressure. A balancing damper shall be fitted at the outlet of the fan to adjust the pressure range of the systems to suit the damper under test. A variable speed fan may be used instead of the dilution damper.

5.4 Instrumentation for measuring and recording the furnace temperature, in accordance with ISO 834-1. Locations of the furnace thermocouples for a number of different test arrangements are shown in figures 3, 4, 5, 6, 7 and 8.

The gas temperature adjacent to the flow measuring device shall be measured by a 0,25 mm bare wire thermocouple enclosed in a 6 mm diameter porcelain twin wall tube with its measuring junction located at the centreline of the measuring duct and at a distance equal to twice the diameter of the measuring duct downstream from the flow measuring device. A similar thermocouple shall be located at the exit from the connecting duct plenum (see figures 1 and 2). Alternative thermocouples may be used provided it can be shown that they have equivalent response time.

5.5 Instrumentation for measuring and recording surface temperature, in accordance with ISO 834-1.

It shall be located, depending on the method of mounting the damper selected, in the positions shown in either figures 3, 4, 5, 6, 7 or 8.

5.6 Instrumentation for measuring pressure differential between the furnace and the connecting duct.

A pressure tapping shall be located on the centreline of one vertical side wall of the connecting duct. Instrumentation shall have a 300 Pa measurement capacity higher than the test pressure chosen for the test. Instrumentation shall also be provided for measuring the pressure difference between inside and outside (ambient) of the furnace.

5.7 Timing device, capable of running throughout the test period.

5.8 Gap gauges and cotton pad, according to ISO 834-1, to judge the integrity of the joints between the damper and its connecting duct and the damper assembly and the supporting construction of the test arrangement.

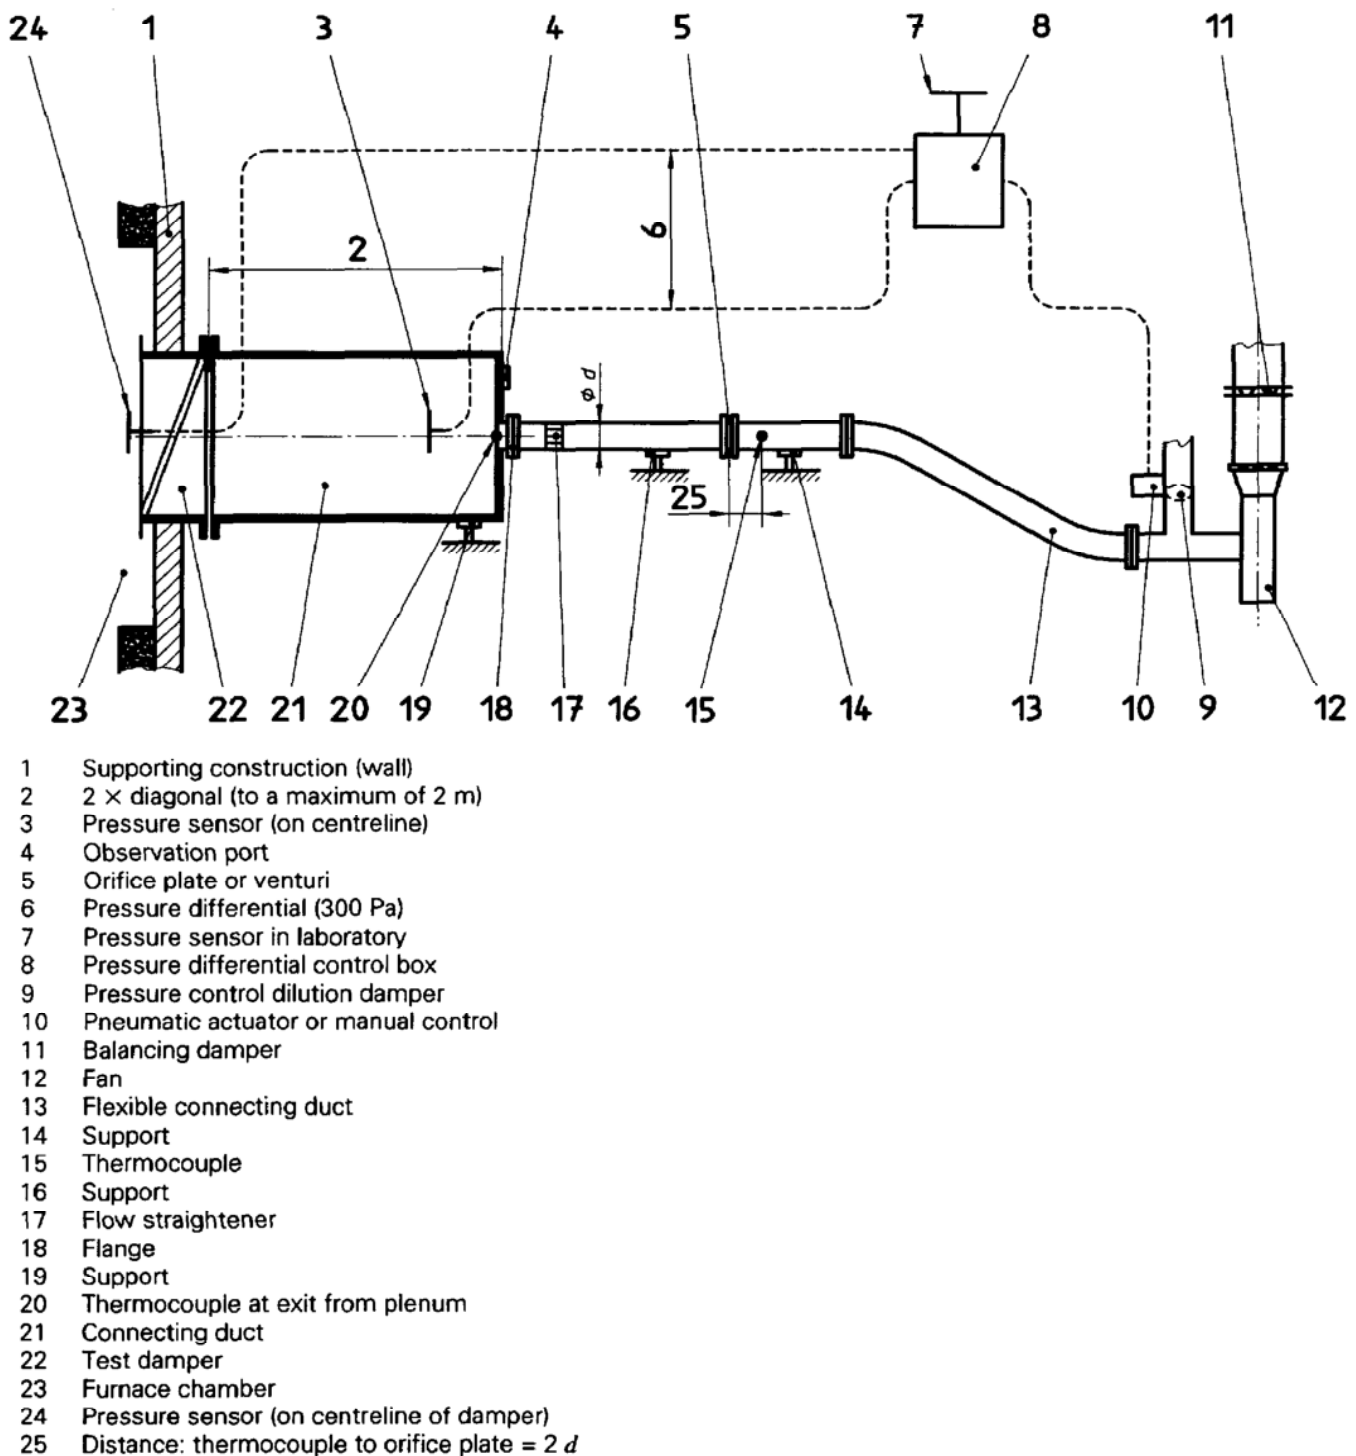


Figure 1 — Example of general test arrangement