
**Information technology — Open Systems
Interconnection — Virtual Terminal Basic
Class Protocol —**

Part 1:
Specification

*Technologies de l'information — Interconnexion de systèmes ouverts
(OSI) — Protocole de classe de base de terminal virtuel —*

Partie 1: Spécification



Contents

1 Scope 1

2 Normative references 1

3 Definitions..... 2

 3.1 Global OSI definitions 2

 3.2 Association Control Service Element definitions..... 2

 3.3 Presentation Layer Service Element definitions 2

 3.4 Virtual Terminal Service definitions..... 2

 3.5 Virtual Terminal Protocol definitions 2

4 Abbreviations..... 3

 4.1 Virtual Terminal Service abbreviations 3

 4.2 Miscellaneous 3

 4.3 VT Protocol elements 3

5 Overview 3

 5.1 Virtual Terminal Service summary 3

 5.2 Model..... 6

 5.3 Service assumed from the Presentation Layer 6

 5.4 Service assumed from ACSE 6

 5.5 Functions of the VT Protocol..... 7

 5.6 Protocol Functional Units..... 8

 5.7 Modes of Operation..... 8

 5.8 Access Control 8

6 Protocol elements 8

 6.1 APQ (VT-P-ABORT) 9

 6.2 ASQ (VT-ASSOCIATE-REQ) 9

 6.3 ASR (VT-ASSOCIATE-RESP) 9

 6.4 AUQ (VT-U-ABORT) 10

 6.5 BKQ (VT-BREAK-REQ)..... 10

 6.6 BKR (VT-BREAK-RESP)..... 10

 6.7 DAQ (VT-ACK-RECEIPT) 10

© ISO/IEC 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

- 6.8 DLQ (VT-DELIVER) 10
 - 6.9 ENQ (VT-END-NEG-REQ) 10
 - 6.10 ENR (VT-END-NEG-RESP) 10
 - 6.11 GTQ (VT-GIVE-TOKEN) 10
 - 6.12 HDQ (VT-HIGH-PRI-DATA) 10
 - 6.13 NAQ (VT-NEG-ACCEPT) 10
 - 6.14 NDQ (VT-DATA) 11
 - 6.15 NIQ (VT-NEG-INVITE) 11
 - 6.16 NJQ (VT-NEG-REJECT) 11
 - 6.17 NOQ (VT-NEG-OFFER) 11
 - 6.18 RLQ (VT-RELEASE-REQ) 11
 - 6.19 RLR (VT-RELEASE-RESP) 11
 - 6.20 RTQ (VT-REQUEST-TOKEN) 11
 - 6.21 SNQ (VT-START-NEG-REQ) 11
 - 6.22 SNR (VT-START-NEG-RESP) 11
 - 6.23 SPQ (VT-SWITCH-PROFILE-REQ) 12
 - 6.24 SPR (VT-SWITCH-PROFILE-RESP) 12
 - 6.25 UDQ (VT-URGENT-DATA) 12
 - 6.26 EXQ (VT-P-EXCEPTION-REQ) 12
 - 6.27 EXR (VT-P-EXCEPTION-RESP) 12
- 7 Procedures 12
- 8 Primary procedures 13
 - 8.1 Association Establishment 13
 - 8.2 Agreed Release 13
 - 8.3 Unconditional Termination 13
 - 8.4 Negotiation 13
 - 8.5 Data Transfer 13
 - 8.6 Delivery Control 14
 - 8.7 Token Management 14
 - 8.8 Break 14
- 9 Switch Profile procedures 21
 - 9.1 Association Establishment 21
 - 9.2 Agreed Release 21
 - 9.3 Unconditional Termination 21
 - 9.4 Negotiation 21
 - 9.5 Data Transfer 21
 - 9.6 Delivery Control 21
 - 9.7 Token Management 22
 - 9.8 Break and Exception 22
- 10 Multiple Interaction Negotiation procedures 22
 - 10.1 Association Establishment 22
 - 10.2 Agreed Release 23
 - 10.3 Unconditional Termination 23
 - 10.4 Negotiation 23
 - 10.5 Data Transfer 23
 - 10.6 Delivery Control 24
 - 10.7 Token Management 24
 - 10.8 Break and Exception 24

11 Mapping of protocol elements 24

 11.1 Mapping to Association Control Services 25

 11.2 Use of Presentation Services 27

12 Protocol data unit structure 28

 12.1 General format. 28

 12.2 General definitions. 34

 12.3 Conceptual Data Store definitions. 40

 12.4 Control, Signal and Status definitions 44

 12.5 Device Object definitions. 47

13 Conformance 50

 13.1 Dynamic conformance requirements. 50

 13.2 Static conformance requirements 50

 13.3 Protocol Implementation Conformance Statement (PICS) 50

Annex A State Tables 51

 A.1 General 51

 A.2 Parameters, VTPM rights and variables. 51

 A.3 Conventions for use of state tables 53

 A.4 Actions to be taken by the VTPM 53

Annex B Defined OBJECT IDENTIFIER names 69

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO and IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO 9041-1 was prepared by Joint Technical Committee ISO/IEC JTC1, *Information technology*, Subcommittee SC21, *Open systems interconnection, data management and open distributed processing*.

This second edition cancels and replaces the first edition (ISO/IEC 9041-1:1990), which has been technically revised. It also incorporates Amendment 2:1992, Technical Corrigendum 1:1992 and Technical Corrigendum 2:1993.

ISO/IEC 9041 consists of the following parts, under the general title *Information technology – Open Systems Interconnection – Virtual Terminal Basic Class Protocol*:

- *Part 1: Specification*
- *Part 2: Implementation Conformance Statement (PICS) Proforma*

Annexes A and B form an integral part of this part of ISO/IEC 9041.

Introduction

ISO/IEC 9041 is one of a set of International Standards produced to facilitate the interconnection of computer systems. It is related to other International Standards in the set as defined in the Reference Model for Open Systems Interconnection (ISO/IEC 7498-1). The Reference Model subdivides the area of standardization for interconnection into a series of layers of specification, each of manageable size.

This part of ISO/IEC 9041 defines the manner in which two protocol machines (called Virtual Terminal Protocol Machines or VTPMs) in the Application Layer of the Reference Model for Open Systems Interconnection communicate in order to provide the Virtual Terminal Basic Class Service defined in ISO/IEC 9040 making use of the Presentation Layer and of the association control service of ACSE within the Application Layer.

Part 2 of ISO/IEC 9041 includes the Protocol Implementation Conformance Statement (PICS) proforma for the Virtual Terminal Basic Class Protocol as defined in this part of ISO/IEC 9041.

Information technology – Open Systems Interconnection – Virtual Terminal Basic Class Protocol – Part 1: Specification

1 Scope

This part of ISO/IEC 9041 specifies:

- a) a set of procedures for the connection-oriented transfer of data, control and reference information between protocol machines which implement the functions of a provider of the Basic Class Virtual Terminal Service;
- b) the two modes in which those procedures operate;
- c) the structure of protocol elements used for the transfer of data and control information and the mapping of these protocol elements onto ACSE and lower layer services;
- d) the means of negotiating the functional units to be used by the protocol machines and the parameters of the service;
- e) the structure and mapping of protocol elements used for the transfer of data and control information.

The procedures are defined in terms of:

- f) the interactions between Virtual Terminal Protocol Machines through the exchange of Virtual Terminal protocol elements;
- g) the interactions between a Virtual Terminal Protocol Machine and the Virtual Terminal service user in the same system through the exchange of Virtual Terminal service primitives;
- h) the interactions between a Virtual Terminal Protocol Machine and the ACSE and Presentation Service providers through the exchange of service primitives.

This part of ISO/IEC 9041 also specifies conformance requirements (see clause 13) for systems implementing these procedures. It does not contain tests which can be used to demonstrate this conformance.

These procedures are applicable to instances of communication between systems that support the Basic Class Virtual Terminal Service in the Application Layer of the Reference Model for Open Systems Interconnection and which wish to interconnect in an open systems environment.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO/IEC 9041. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO/IEC 9040 are encouraged to investigate the possibility of applying the most recent editions of the standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 2022:1994, *Information technology – Character code structure and extension techniques (fourth edition)*.

ISO/IEC 6429:1992, *Information technology – Control functions for coded character sets (third edition)*.

ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*.

ISO/IEC 7498-3:1997, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*.

ISO/IEC 8326:1996, *Information technology – Open System Interconnection – Session service definition (second edition)*.

ISO/IEC 8649:1996, *Information technology – Open Systems Interconnection – Service definition for the Association Control Service Element (second edition)*.

ISO/IEC 8822:1994, *Information technology – Open Systems Interconnection – Presentation service definition*.

ISO/IEC 8824-1:1995, *Information technology – Abstract Syntax Notation One (ASN.1): Specification of basic notation*.

ISO/IEC 8825-1:1994, *Information technology – ASN.1 encoding rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER)*.

ISO/IEC 9040:1997, *Information technology – Open Systems Interconnection – Virtual Terminal Basic Class Service*.

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Basic Reference Model – Conventions for the definition of OSI services*.

The International Register of Coded Character Sets to be used with Escape Sequences. ¹⁾

3 Definitions

3.1 Global OSI definitions

This part of ISO/IEC 9041 is based on the concepts developed in ISO/IEC 7498, and makes use of the following terms defined in it:

- 1) application entity;
- 2) application layer;
- 3) protocol data unit;
- 4) user element.

Definitions of the following terms are given in ISO/IEC 10731:

- 5) primitive;
- 6) confirm (primitive);
- 7) indication (primitive);
- 8) request (primitive);
- 9) response (primitive);
- 10) service provider;
- 11) service user.

3.2 Association Control Service Element definitions

This part of ISO/IEC 9041 makes use of the following terms defined in ISO/IEC 8649:

- 1) application association;
- 2) application context.

3.3 Presentation Layer Service Element definition

This part of ISO/IEC 9041 makes use of the term abstract syntax which is defined in ISO/IEC 8822.

3.4 Virtual Terminal Service definitions

This part of ISO/IEC 9041 uses the following definitions contained in ISO/IEC 9040:

- 1) A-mode, Asynchronous Mode;
- 2) access-rule;
- 3) Application VT-user;
- 4) Block;
- 5) character-box graphic element;
- 6) Context Control Object (CCO);
- 7) current-VTE;
- 8) draft-VTE;
- 9) Field;

- 10) Field Definition Control Object (FDCO);
- 11) Field Definition Record (FDR);
- 12) Field Element;
- 13) Field Entry Condition (FEC);
- 14) Field Entry Event (FEE);
- 15) Field Entry Instruction (FEI);
- 16) Field Entry Instruction Control Object (FEICO);
- 17) Field Entry Instruction Record (FEIR);
- 18) Field Entry Pilot Control Object (FEPCO);
- 19) Field Entry Pilot Record (FEPR);
- 20) Field Entry Reaction (FER);
- 21) full-VTE;
- 22) Initial Facility Set;
- 23) net-effecting;
- 24) Reference Information Object (RIO);
- 25) repertoire;
- 26) ripple.
- 27) S-mode, Synchronous Mode;
- 28) Terminal VT-user;
- 29) Transmission Policy Control Object (TPCO);
- 30) VT-association;
- 31) VT-context-value;
- 32) VT-environment (VTE);
- 33) VT-user;
- 34) VTE-parameter;

3.5 Virtual Terminal Protocol definitions

For the purposes of this part of ISO/IEC 9041 the following definitions apply.

3.5.1 protocol element: An abstract unit of information, defined in clause 6, communicated between peer VTPMs, that maps

- a) directly to an ACSE or presentation service primitive; and/or
- b) to a PDU type that is conveyed by a user information parameter of ACSE or a user data parameter of the presentation service.

3.5.2 initiating VTPM: The VTPM that initiates an individual procedure.

3.5.3 target VTPM: The VTPM to which the protocol element initiating a procedure is directed.

3.5.4 sending VTPM: The initiating VTPM for a data transfer procedure.

3.5.5 receiving VTPM: The target VTPM for a data transfer procedure.

¹⁾ Available from the European Computer Manufacturers Association (ECMA), 114 Rue du Rhône, CH 1204 Genève, Switzerland.

3.5.6 dynamic conformance requirements: All those requirements (and options) which determine what observable behaviour is permitted in instances of communication.

3.5.7 static conformance requirements: Constraints which facilitate interworking by defining the requirements for kernel sets of capabilities of an implementation.

3.5.8 protocol implementation conformance statement (PICS): A statement made by the supplier of an implementation which states the capabilities and options which have been implemented, and any features which have been omitted.

3.5.9 VT-token: A single entity which maps onto all of the available session tokens provided by the Presentation Layer. If there are no session tokens available then both sides are considered to hold this token.

4 Abbreviations

4.1 Virtual Terminal Service abbreviations

A-mode	Asynchronous Mode
ACS	Access Control Store
CCA	Conceptual Communication Area
CCO	Context Control Object
CDS	Conceptual Data Store
CO	Control Object
CSS	Control, Signal and Status Store
DO	Display Object
DSD	Data Structure Definition
FDCO	Field Definition Control Object
FDR	Field Definition Record
FEC	Field Entry Condition
FEE	Filed Entry Event
FEI	Field Entry Instruction
FEICO	Field Entry Instruction Control Object
FEIR	Field Entry Instruction Record
FEPCO	Field Entry Pilot Control Object
FEPR	Field Entry Pilot Record
FER	Field Entry Reaction
MIN	Multiple Interaction Negotiation
RIO	Reference Information Object
S-mode	Synchronous Mode
TPCO	Transmission Policy Control Object
VT	Virtual Terminal
VTE	Virtual Terminal Environment
VTs	Virtual Terminal Service

4.2 Miscellaneous

ACSE	Association Control Service Element
------	-------------------------------------

ASN.1	Abstract Syntax Notation One
PAB	Provider Abort
PDU	Protocol Data Unit
PICS	Protocol Implementation Conformance Statement
TWA	Two-Way Alternate
TWS	Two-Way Simultaneous
VTP	Virtual Terminal Protocol
VTPM	Virtual Terminal Protocol Machine

4.3 VT Protocol elements

APQ	VT-P-ABORT
ASQ	VT-ASSOCIATE-REQ
ASR	VT-ASSOCIATE-RESP
AUQ	VT-U-ABORT
BKQ	VT-BREAK-REQ
BKR	VT-BREAK-RESP
DAQ	VT-ACK-RECEIPT
DLQ	VT-DELIVER
ENQ	VT-END-NEG-REQ
ENR	VT-END-NEG-RESP
EXQ	VT-P-EXCEPTION-REQ
EXR	VT-P-EXCEPTION-RESP
GTQ	VT-GIVE-TOKEN
HDQ	VT-HIGH-PRI-DATA
NAQ	VT-NEG-ACCEPT
NDQ	VT-DATA
NIQ	VT-NEG-INVITE
NJQ	VT-NEG-REJECT
NOQ	VT-NEG-OFFER
RLQ	VT-RELEASE-REQ
RLR	VT-RELEASE-RESP
RTQ	VT-REQUEST-TOKEN
SNQ	VT-START-NEG-REQ
SNR	VT-START-NEG-RESP
SPQ	VT-SWITCH-PROFILE-REQ
SPR	VT-SWITCH-PROFILE-RESP
UDQ	VT-URGENT-DATA

5 Overview

5.1 Virtual Terminal Service summary

The protocol specified in this part of ISO/IEC 9041 provides the Basic Class Virtual Terminal Service defined in ISO/IEC 9040. The VT-service primitives are listed in table 1.

Table 1 - Virtual Terminal Service Primitives

Service Primitive		Service Parameters
VT-ASSOCIATE	request indication	Called Application Entity Title Calling Application Entity Title VT-class VT-functional-units VT-mode VT-WAVAR-owner VT-profile-name VT-profile-arg-offer-list
	response confirm	Responding Application Entity Title VT-functional-units VT-WAVAR-owner VT-profile-arg-value-list VT-result VT-user-failure-reason (confirm only)
VT-P-ABORT	indication	VT-reason
VT-RELEASE	request indication	
	response confirm	VT-result VT-user-failure-reason VT-provider-failure-reason (confirm only)
VT-U-ABORT	request indication	VT-user-failure-reason
VT-DATA (excluding the two following cases)	request indication	VT-echo-now VT-start-entry VT-object-update VT-object-descriptor VT-object-data
VT-DATA (high priority Control Objects only)	request indication	VT-object-update VT-object-descriptor VT-object-data
VT-DATA (urgent priority Control Objects only)	request indication	VT-object-update VT-object-descriptor VT-object-data
VT-DELIVER	request indication	VT-ack-request
VT-ACK-RECEIPT	request indication	
VT-GIVE-TOKEN	request indication	
VT-REQUEST-TOKEN	request indication	

Table 1 (concluded)

Service Primitive		Service Parameters
VT-SWITCH-PROFILE	request indication	VT-profile-name VT-profile-arg-offer-list VT-object-retention-list
	response confirm	VT-profile-arg-value-list VT-result VT-user-failure-reason VT-provider-failure-reason (confirm only) VT-object-retention-list
VT-START-NEG	request indication	VT-profile-name VT-profile-arg-offer-list
	response confirm	VT-profile-arg-value-list VT-result VT-user-failure-reason VT-provider-failure-reason (confirm only)
VT-END-NEG	request indication	VT-vte-choice VT-vte-failure-allowed VT-object-retention-list
	response confirm	VT-vte-choice VT-result VT-user-failure-reason VT-provider-failure-reason (confirm only) VT-object-retention-list
VT-NEG-INVITE	request indication	VT-param-ident-list
VT-NEG-OFFER	request indication	VT-param-offer-list
VT-NEG-ACCEPT	request indication	VT-param-value-list
VT-NEG-REJECT	request indication	VT-param-ident-list
VT-BREAK	request indication	VT-token VT-information
	response confirm	VT-token VT-information
VT-P-EXCEPTION	indication	VT-exception-source VT-exception-type VT-information

5.2 Model

The Basic Class Virtual Terminal Protocol operates between two Virtual Terminal Protocol Machines (VTPMs) in the Application layer of the OSI model. Protocol elements are exchanged between these, using the services of Association Control and of the Presentation layer as defined in ISO/IEC 8649 and ISO/IEC 8822.

The VT service is modelled as a single Conceptual Communication Area which is accessible to two communicating service users and which contains all the necessary information to allow these VT-users to derive a consistent view of the Virtual Devices which constitute the Virtual Terminal. The CCA is partitioned into four sub-areas:

- a) a conceptual data store (CDS) containing one or more display objects;
- b) a control, signaling and status store (CSS) containing a number of control objects;
- c) an access control store (ACS);
- d) a data structure definition (DSD) which parametrically defines the structure of the CDS and CSS.

The CCA is conceptually accessed by VT-users via service primitives in which information is transferred to or from the VT-users. Each VTPM is modelled as having its own CCA, see figure 1. These two CCAs constitute the VT context referred to in the Basic Class VTS definition. Each VTPM may also maintain a reset context which preserves the contents of all DOs and COs as they existed at the time the current VTE was established. This is used to provide the VT-context-value after completion of the break procedure, see 8.8.

5.3 Service assumed from the Presentation Layer

The protocol specified in this part of ISO/IEC 9041 assumes the use of the Presentation Service defined in ISO/IEC 8822. Information is transferred to and from the Presentation service provider in the primitives listed in table 2.

5.4 Service assumed from ACSE

The protocol specified in this part of ISO/IEC 9041 assumes the use of the Association Control service defined in ISO/IEC 8649. Information is transferred to and from ACSE in the service primitives listed in table 3.

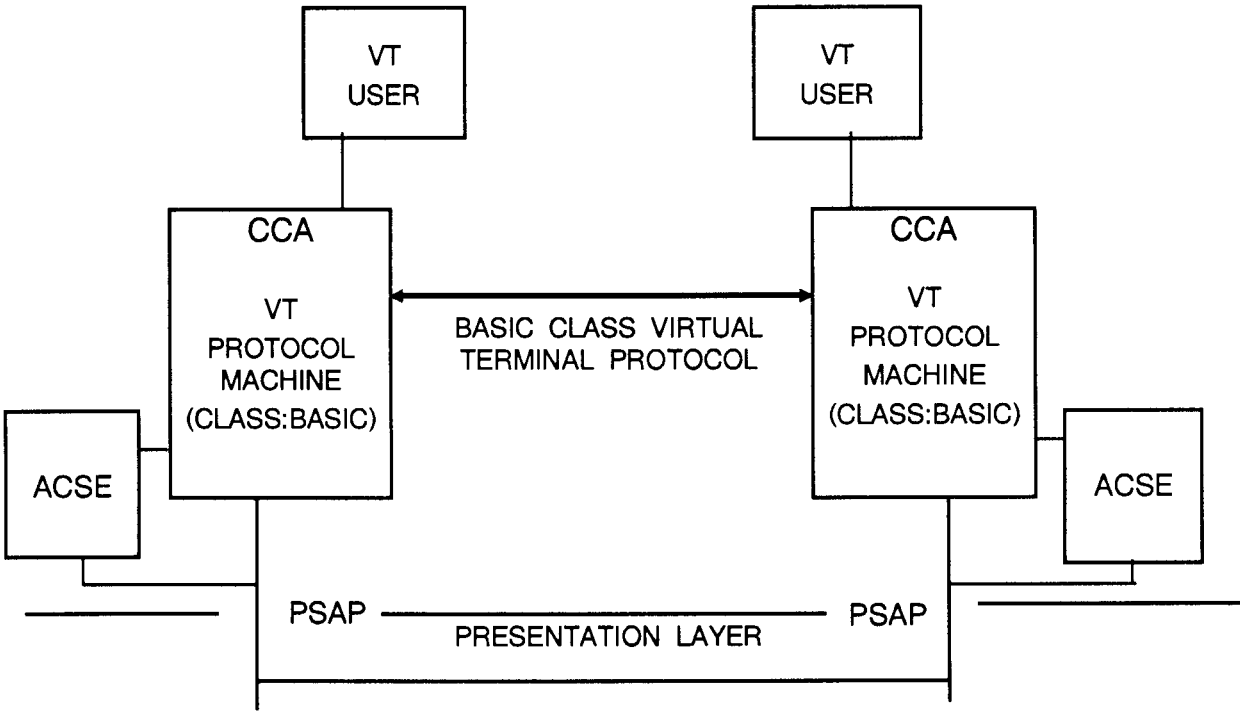


Figure 1 - Model

Table 2 - Presentation Service primitives

Presentation service	primitives
P-DATA	request indication
P-EXPEDITED-DATA	request indication
P-RESYNCHRONIZE	request indication response confirm
P-SYNCHRONIZE-MAJOR	request indication response confirm
P-TOKEN-GIVE	request indication
P-TOKEN-PLEASE	request indication
P-TYPED-DATA	request indication

Table 3 - ACSE service primitives

ACSE service	primitive
A-ASSOCIATE	request indication response confirm
A-RELEASE	request indication response confirm
A-ABORT	request indication
A-P-ABORT	indication

5.5 Functions of the VT Protocol

5.5.1 Association Establishment

The purpose of VT-association establishment is to establish a VT-association between two VT-users such that:

- a) the use of this VT-protocol is confirmed;
- b) the required dialogue discipline is agreed;
- c) a suitable transfer syntax is used;

d) either an initial VTE is agreed or it is agreed that the VT-environment will be negotiated later before any data is transferred.

5.5.2 Association Termination

The purpose of VT-association Termination is to cause the VT-association to cease to exist.

5.5.3 Negotiation

Negotiation provides a mechanism by which the VT-users and VTPMs can agree upon the VT-environment to be used. Two forms of negotiation are supported, a single interaction profile switch and a multiple interaction dialogue.

5.5.4 Data Transfer

The purpose of Data Transfer is the sending, from one VTPM to the other, of structured data representing operations upon an object or objects in the CCA defined in the virtual terminal model.

5.5.5 Delivery Control

The purpose of Delivery Control is:

- a) to allow the VT-user sending data to indicate points at which operations on VT objects conceptually take effect;
- b) to allow the receipt of such a delivery point indication to be acknowledged;
- c) to allow data which update objects with the same access rules to be grouped together and simultaneously be made available to the VT-user.

5.5.6 Dialogue Management

Dialogue Management provides the VT-users with access to the lower layer functions. This dialogue management enforces TWA discipline on the sending of some data and on the exercise of some control functions.

5.5.7 Error Handling

Error Handling permits detection of non-compliance with the protocol, reception of error indications from other service providers and the taking of appropriate action. The errors cause the association to be terminated with an appropriate error indication (identifying the source of error).

NOTE – The procedure for Error Handling is included with that for unconditional termination of an association.

5.5.8 Interrupt

Two interrupt functions are provided. The first is a non-destructive mechanism which allows priority information to be exchanged between the VT-users outside the normal data flow without disrupting that data flow. The second is a destructive mechanism which allows a VT-user unconditionally to bring the current dialogue to a halt. Information is exchanged between the VT-users to enable them to resynchronize their operations.

5.5.9 Exceptions Handling

Exceptions Handling permits the VT service provider to advise the VT-users of certain non-fatal exception conditions arising during the operation of a VT-association without terminating the VT-association.

5.6 Protocol functional units

This part of ISO/IEC 9041 defines the following functions which are available in the Basic Class Virtual Terminal Protocol independently of which functional units have been selected:

- a) Association Establishment;
- b) Association Termination;
- c) Data Transfer;
- d) Delivery Control (optional, see Note 1);
- e) Dialogue Management (S-mode only);
- f) Error Handling.

NOTE 1 – Use of delivery-control is controlled at the level of VTE-profile by a VTE-parameter.

This part of ISO/IEC 9041 also defines seven functional units of the Basic Class Virtual Terminal Protocol which correspond to the similarly named service functional units which are defined in ISO/IEC 9040. The following functions are available only if the corresponding functional unit has been selected:

- g) Switch Profile Negotiation;
- h) Multiple Interaction Negotiation;
- i) Negotiated Release;
- j) Break;
- k) Urgent Data;
- l) Reference Information Objects;
- m) Exceptions.

The Multiple Interaction Negotiation functional unit may only be selected if the Switch Profile functional unit is also selected. The Exceptions functional unit may only be selected if the Break functional unit is also selected.

NOTE 2 – Service functional units defined in ISO/IEC 9040 but not included above do not affect the protocol procedures but may affect the allowed content of some protocol elements as defined in later clauses.

5.7 Modes of operation

The protocol operates in two modes: Asynchronous and Synchronous. In the Synchronous mode (S-mode) the presentation connection supporting the VT communication is treated as a TWA connection, and the VTPMs send normal update data to each other alternately. In the Asynchronous mode (A-mode) the presentation connection is treated as a TWS connection, and the VTPMs are not restricted in the exchange of data.

5.8 Access control

The initiation and reception of some protocol elements by a VT-user is conditional upon the location of the token and upon

the access-rules associated with the objects affected by the elements.

6 Protocol elements

Table 4 lists the elements of the Virtual Terminal Basic Class protocol with the associated VT service and a cross reference to the clause where the protocol element is further described. The description includes, for each element, its purpose and a list of its parameters.

Table 4 - VT protocol elements

Protocol element	VT service	Cross reference
ASQ	VT-ASSOCIATE	6.2
ASR	VT-ASSOCIATE	6.3
APQ	VT-P-ABORT	6.1
AUQ	VT-U-ABORT	6.4
RLQ	VT-RELEASE	6.18
RLR	VT-RELEASE	6.19
HDQ	VT-DATA (high priority)	6.12
NDQ	VT-DATA (normal)	6.14
UDQ	VT-DATA (urgent priority)	6.25
DAQ	VT-ACK-RECEIPT	6.7
DLQ	VT-DELIVER	6.8
GTQ	VT-GIVE-TOKEN	6.11
RTQ	VT-REQUEST-TOKEN	6.20
BKQ	VT-BREAK	6.5
BKR	VT-BREAK	6.6
EXQ	VT-P-EXCEPTION	6.26
EXR	VT-P-EXCEPTION	6.27
SPQ	VT-SWITCH-PROFILE	6.23
SPR	VT-SWITCH-PROFILE	6.24
ENQ	VT-END-NEG	6.9
ENR	VT-END-NEG	6.10
NAQ	VT-NEG-ACCEPT	6.13
NIQ	VT-NEG-INVITE	6.15
NJQ	VT-NEG-REJECT	6.16
NOQ	VT-NEG-OFFER	6.17
SNQ	VT-START-NEG	6.21
SNR	VT-START-NEG	6.22

Procedures specifying the use of the elements are specified in clauses 7 through 10 and their mapping to the presentation service or ACSE and their ASN.1 structure are specified in clauses 11 and 12.

In some implementations it may not be possible to provide the parameters of the APQ and AUQ protocol elements. This is due to possible length limitations in the supporting services. Consequently, the decision whether to send these parameters is a local one based upon a knowledge of the capability of the supporting services. For the same reason the parameters of other protocol elements, while they may be sent, may be restricted as to their complexity. These latter are:

- a) ASQ;
- b) ASR;
- c) SNQ;
- d) SNR;
- e) SPQ;
- f) SPR;
- g) UDQ.

NOTE – In the following sub-clauses the prefix VT- is used where there is a service parameter in ISO/IEC 9040 with the same name.

6.1 APQ (VT-P-ABORT)

6.1.1 Purpose

To force unconditional termination of the VT-association (initiated by the VTPM).

6.1.2 Parameter

VT-reason: Optional, if present takes one of the values "local error" or "protocol error".

6.2 ASQ (VT-ASSOCIATE-REQ)

6.2.1 Purpose

To request establishment of a VT-association.

6.2.2 Parameters

- a) called-application-entity-title: Specifies the application entity with which a VT-association is to be established;
- b) calling-application-entity-title: Identifies the application entity initiating the VT-association;
- c) VT-class: Specifies the VT service class to be provided; takes the value "Basic" to invoke the service specified in ISO/IEC9040;

NOTE – The use of other values of this parameter for the invocation of other International Standards is outside the scope of ISO/IEC 9041.

- d) VT-mode: Specifies whether A-mode or S-mode will be in effect when the association is established and whether mode switching is to be permitted;
- e) VT-WAVAR-owner: Defines which side of the dialogue will initially own the WAVAR token if this exists; takes one of the values "initiator-side", "acceptor-side", or "acceptor-chooses"; omitted if WAVAR does not exist;
- f) VT-profile-name: If present, the name of the profile (see ISO/IEC 9040); if absent, the default profile defined in ISO/IEC 9040 for A-mode or for S-mode, as selected by the VT-mode parameter, is used;
- g) VT-profile-arg-offer-list: if present, a list of items in which each profile argument under negotiation is either a value, list of values or range of values; omitted if the profile identified by VT-profile-name has no profile arguments;
- h) VT-functional-units: If present, specifies the proposed functional units of the current VT service class; takes one or more values from the following list:
 - 1) Profile Switch,
 - 2) Multiple Interaction Negotiation,

- 3) Negotiated Release,
- 4) Urgent Data,
- 5) Destructive Break,
- 6) Enhanced Access-rules,
- 7) Structured Control Objects (Structured COs),
- 8) Blocks,
- 9) Fields,
- 10) Reference Information Objects (RIOs),
- 11) Ripple,
- 12) Exceptions,
- 13) Context Retention;

- i) protocol-version: For the initiating VTPM this is a variable length bit string where each bit set to one indicates that the corresponding version of the protocol is supported. Bit 0 represents the first version, bit 1 represents the second, etc. Multiple bits may be set indicating support of multiple versions. No trailing bits higher than the highest version of this standard that the VTPM supports shall be sent, i.e., the last bit of the string must be set to one. The receiving VTPM shall ignore trailing bits higher than the one indicating the latest version of this part of ISO/IEC 9041 that it supports;
- j) implementation-identifier: Optional, allows implementors to identify their implementation and its version for maintenance purposes.

6.3 ASR (VT-ASSOCIATE-RESP)

6.3.1 Purpose

To complete or refuse establishment of a VT-association.

6.3.2 Parameters

- a) responding-application-entity-title: Identifies the application entity which is responding to a VT-association request;
- b) VT-WAVAR-owner: As in 6.2 except that the value "acceptor chooses" is not allowed. Only present if the ASQ parameter was "acceptor chooses";
- c) VT-profile-arg-value-list: If present, a list of parameters with unique values of each parameter selected from the list or range of values in the profile argument offer list; not present if the value of VT-result is "failure", see also 6.2.2 g);
- d) VT-result: Takes one of the values "success", "success-with-warning" or "failure";
- e) failure-reason: Conveys either a text string supplied by the responding VT-user or one of the values "VTE-incomplete", "VTE-parameter-not-supported", "VTE-parameter-combination-not-supported", or "VTE-profile-not-supported";
- f) protocol-version: In the case of successful establishment this is similar to the corresponding item in 6.2.2 except that only a single bit may be set to one. This bit selects the version of the protocol which will be used during the association. If the VT-result value is "failure" this bit string indicates the protocol version(s) of this part of ISO/IEC 9041 that can be supported by the rejecting VTPM;
- g) VT-functional units: As in 6.2.2 h);
- h) implementation-identifier: As in 6.2.2 j).

6.4 AUQ (VT-U-ABORT)

6.4.1 Purpose

To force unconditional termination of the VT-association (initiated by the VT-user).

6.4.2 Parameters

VT-user-failure-reason: optional; user provided text string.

6.5 BKQ (VT-BREAK-REQ)

6.5.1 Purpose

To request a destructive priority interrupt to be indicated to the remote VT-user by the remote VTPM.

6.5.2 Parameters

- a) VT-WAVAR-owner: can take one of the values "initiator-side", "acceptor-side" or "acceptor-chooses"; omitted if WAVAR does not exist;
- b) VT-information: Items as defined in ISO/IEC 9040.

6.6 BKR (VT-BREAK-RESP)

6.6.1 Purpose

To acknowledge to the remote VTPM that a destructive priority interrupt was indicated to the local VT-user.

6.6.2 Parameters

- a) VT-WAVAR-owner: can take one of the values "initiator-side" or "acceptor-side"; omitted if WAVAR does not exist;
- b) VT-information: Items as defined in ISO/IEC 9040.

6.7 DAQ (VT-ACK-RECEIPT)

6.7.1 Purpose

To acknowledge a delivery point identified by the receipt of a DLQ.

6.7.2 Parameters

None.

6.8 DLQ (VT-DELIVER)

6.8.1 Purpose

To designate delivery points in the stream of NDQ PDUs and, if required, to request acknowledgement of receipt.

6.8.2 Parameters

VT-ack-request: A single boolean indicating whether or not an acknowledgement is explicitly required.

6.9 ENQ (VT-END-NEG-REQ)

6.9.1 Purpose

To request the synchronized termination of a multiple interaction negotiation and to cause a transition to the data handling phase.

6.9.2 Parameters

- a) VT-vte-choice: Takes one of the values "draft", "current" or "either";
- b) VT-failure-allowed: Optional, if present takes one of the values "yes" or "no";
- c) VT-object-retention-list: Optional, if present contains a list of DO and CO names whose contents are requested to be retained.

6.10 ENR (VT-END-NEG-RESP)

6.10.1 Purpose

To respond to a request to terminate negotiation.

6.10.2 Parameters

- a) VT-vte-choice: Optional, if present takes one of the values "draft" or "current";
- b) VT-result: Takes one of the values "success", "success-with-warning" or "failure";
- c) VT-user-failure-reason: Optional user provided text string;
- d) VT-provider-failure-reason: Optional, if present takes the value "VTE-incomplete";
- e) vt-object-retention-list: Optional, if present contains a list of DO and CO names whose contents are agreed to be retained.

6.11 GTQ (VT-GIVE-TOKEN)

6.11.1 Purpose

To pass all defined session tokens to the peer VTPM.

6.11.2 Parameters

None.

6.12 HDQ (VT-HIGH-PRI-DATA)

6.12.1 Purpose

To convey updates to Control Objects for which the CO-priority VTE-parameter has the value "high".

6.12.2 Parameters

object updates: A sequence of zero or more data items. Each data item is a (CO-name, object update) pair. Each CO-name identifies a Control Object; the corresponding object update identifies permitted updates to that object. The permitted updates to Control Objects are defined in ISO/IEC 9040.

6.13 NAQ (VT-NEG-ACCEPT)

6.13.1 Purpose

To select values for one or more of the VTE-parameters specified in a previous VT-NEG-OFFER protocol element.

6.13.2 Parameters

VT-param-value-list: A list of VTE-parameters and corresponding values for those parameters selected from the alternatives specified in a previous VT-NEG-OFFER.

6.14 NDQ (VT-DATA)

6.14.1 Purpose

To update objects in a "controlled" manner and, for A-mode, to indicate if echoing or data entry may take place following processing of a data item.

6.14.2 Parameters

- a) object updates: A sequence of zero or more data items. Each data item is a (object name, object update) pair. Each object name identifies a Display Object, Control Object or RIO; the corresponding object update identifies permitted updates to that object. The permitted updates to objects are defined in ISO/IEC 9040;
- b) echo-now: If present, takes the value "echo";
- c) start-entry: If present, takes the value "start-entry".

6.15 NIQ (VT-NEG-INVITE)

6.15.1 Purpose

To request the peer to provide values for specified VTE-parameters once an agreement to enter into multiple interaction negotiation has been reached.

6.15.2 Parameters

VT-param-ident-list: The names of VTE-parameters for which values are to be provided.

6.16 NJQ (VT-NEG-REJECT)

6.16.1 Purpose

To reject VTE-parameters contained in previous NOQs whose values and/or value ranges are unacceptable.

6.16.2 Parameters

VT-param-ident-list: The names of VTE-parameters whose values are being rejected.

6.17 NOQ (VT-NEG-OFFER)

6.17.1 Purpose

To pass a list of VTE-parameters and parameter values, lists of values, or value ranges to the peer once an agreement to enter into multiple interaction negotiation has been reached.

6.17.2 Parameters

VT-param-offer-list: A list of VTE-parameters and corresponding values, lists or ranges for those parameters.

6.18 RLQ (VT-RELEASE-REQ)

6.18.1 Purpose

To request the orderly termination of a VT-association.

6.18.2 Parameters

None.

6.19 RLR (VT-RELEASE-RESP)

6.19.1 Purpose

To accept or reject a request for orderly termination of a VT-association.

6.19.2 Parameters

- a) VT-result: Takes one of the values "success" or "failure". The value "failure" may only be used if the Negotiated Release Session functional unit was successfully negotiated in the Session Requirements parameter of the A-ASSOCIATE, see 11.1.1;
- b) failure-reason: Conveys either a text string provided by the responding VT-user or the value "collision-detected" when the failure is determined by the VTPM.

6.20 RTQ (VT-REQUEST-TOKEN)

6.20.1 Purpose

To request possession of all defined Session tokens.

6.20.2 Parameters

None.

6.21 SNQ (VT-START-NEG-REQ)

6.21.1 Purpose

To request the establishment of the Negotiation Active phase.

6.21.2 Parameters

- a) VT-profile-name: As in 6.2.2 f);
- b) VT-profile-arg-offer-list: As in 6.2.2 g).

6.22 SNR (VT-START-NEG-RESP)

6.22.1 Purpose

To indicate success or failure of the attempt to establish the Negotiation Active phase.

6.22.2 Parameters

- a) VT-profile-arg-value-list: As in 6.3.2 c);
- b) VT-result: Takes one of the values "success" or "failure";
- c) failure-reason: Conveys either a text string supplied by the responding VT-user or one of the values "collision-detected" or "profile-not-supported".

6.23 SPQ (VT-SWITCH-PROFILE-REQ)

6.23.1 Purpose

To negotiate a switch to a new full-VTE constructed from a named VTE profile.

6.23.2 Parameters

- a) VT-profile-name: As in 6.2.2 f);
- b) VT-profile-arg-offer-list: As in 6.2.2 g);
- c) VT-object-retention-list: if present contains a list of DO and CO names whose contents are requested to be retained.

6.24 SPR (VT-SWITCH-PROFILE-RESP)

6.24.1 Purpose

To indicate success or failure of the negotiation attempt.

6.24.2 Parameters

- a) VT-profile-arg-value-list: As in 6.3.2 c);
- b) VT-result: Takes one of the values "success" or "failure";
- c) failure-reason: Conveys either a text string supplied by the responding VT-user or one of the values "collision-detected", "parameter-not-supported", "parameter-combination-not-supported" or "profile-not-supported";
- d) VT-object-retention-list: if present contains a list of DO and CO names whose contents are agreed to be retained.

6.25 UDQ (VT-URGENT-DATA)

6.25.1 Purpose

To convey updates to Control Objects for which the CO-priority VTE-parameter has the value "urgent".

This protocol element is always available but its mapping onto lower layer services is dependent on the final value of the Session Requirements parameter, see 11.1.1.

6.25.2 Parameters

As in 6.12.2.

6.26 EXQ (VT-P-EXCEPTION-REQ)

6.26.1 Purpose:

To signal exception conditions between VTPMs.

6.26.2 Parameters

- a) VT-exception-type: Takes one of the following symbolic values:
 - "RIO or temporary buffer full";
 - "too many fields";
 - "too many field elements";
 - "too many FERs";
 - "too many FEIs";
 or a profile defined value of the form tag,value (INTEGER).

- b) VT-information: Takes a value as defined in ISO/IEC 9040.

6.27 EXR (VT-P-EXCEPTION-RESP)

6.27.1 Purpose

To acknowledge an EXQ.

6.27.2 Parameters

None.

7 Procedures

The procedures of the Basic Class VTP are specified in Clauses 8 to 10 as sequences of actions performed by the peer VTPMs. The sequences are presented in tabular form, indicating

- a) Step: numerical order in the sequence; when a sequence branches, the first step in each branch is suffixed with a different letter and subsequent steps in each branch retain this suffix (for example, if a branch occurs after step 4, the next steps are numbered 5a and 5b; 6a then follows 5a and 6b follows 5b);
- b) VTPM: distinguishes the VTPM by its role in the procedure concerned (i.e., initiating-I, target-T, either-E, sending-S, or receiving-R);
- c) Event: one of
 - 1) receipt of the named service primitive from the VT-user,
 - 2) receipt of the named protocol element from the peer VTPM,
 - 3) the event PAB (see note 1)
 - 4) an exception event internal to a VTPM (see note 2);
- d) Action: specifies the action to be taken by the VTPM in response to the event.

NOTES

1 – The failure of some lower layer or some other service of the OSI model, which results in the loss of the VT-association, will be signaled to both VTPMs. Since such a signal is not passed between VTPMs it is not identified as a protocol element; it is however, a significant event and is identified by the name Provider Abort (PAB).

2 – An exception event internal to one VTPM is not inherently known to the other VTPM and is handled as defined in 8.8.

Conditions causing branches are included in the description of the event. Where an action concludes the sequence for an individual branch but is not the last one tabulated, the phrase "sequence ends" is appended. Information that is neither an event nor an action is placed within parentheses.

Each VTPM maintains a reset-context which was set from the current-VTE when it was established and from the initial CO and DO contents as defined in ISO/IEC 9040. This is used to provide the VT-context-value after completion of the break procedure, see 8.8 and table 15.

NOTES

- 3 – The value of reset-context is determined by the values negotiated for various VTE-parameters as defined in ISO/IEC 9040. No extra values need be explicitly stored.
- 4 – The reset-context is only used by the break procedure; it need not be maintained if the Break functional unit is not selected.

8 Primary procedures

This clause specifies the procedures to be used in terms of the sequences of actions to be performed by the communicating VTPMs. The procedures of this clause are to be used when no negotiation is permitted.

8.1 Association Establishment

Establishment of a VT-association, as required by a VT-ASSOCIATE request primitive, is effected by the procedures defined in table 5. On successful completion, any of the available facilities (i.e., data transfer, delivery control, token management and termination) may be used.

Table 6 defines the procedures for association refusal in terms of variant actions in place of those of table 5.

8.2 Agreed Release

The procedures defined in table 7 are used to release the VT-association. In S-mode a VTPM initiating a release action must hold the tokens. In A-mode collisions may occur between an attempted release and another attempted release or between an attempted release and a delivery action requiring confirmation. The refusal and collision portions of the table are each in the form of variations to be applied to the first portion.

8.3 Unconditional Termination

Unconditional termination of a VT-association may be initiated by a VT-user, a VTPM or by some supporting service. The procedures are defined in table 8.

8.4 Negotiation

The primary procedures do not include Negotiation.

8.5 Data Transfer

The Data Transfer procedures are defined in tables 9, 10, 11, 12, and 13. The procedures differ according to the type of data and the direction of transfer relative to the position of the tokens.

Table 5 - Association Establishment procedures

Step	VTPM	Event	Action
1	I	VT-ASSOCIATE request acceptable to initiating VTPM	Send ASQ.
2a	T	ASQ acceptable to target VTPM	Issue VT-ASSOCIATE indication
3aa	T	VT-ASSOCIATE response with VT-result = "success"	Send ASR with VT-result "success". Establish the "reset-context" according to the current contents of all COs and DOs.
4aaa	I	ASR with VT-result = "success" and ASR contents acceptable to initiating VTPM	Issue VT-ASSOCIATE confirm with VT-result="success". Establish the "reset-context" according to the current contents of all COs and DOs.

Table 6 - Association Refusal procedures

Step	VTPM	Event	Action
2b	T	ASQ not acceptable to target VTPM	Send ASR with VT-result="failure".
3ab	T	VT-ASSOCIATE response with VT-result = "failure"	Send ASR with the same VT-result value.
4ab/3b	I	ASR with VT-result = "failure"	Issue VT-ASSOCIATE confirm with the same VT-result value. Sequence ends.
4aab	I	ASR with VT-result = "success" and ASR contents not acceptable to initiating VTPM	Issue VT-ASSOCIATE confirm with VT-result="failure". Send APQ. Sequence ends.

8.6 Delivery Control

The Delivery Control procedures defined in table 13 apply if Simple Delivery Control or Quarantine Delivery Control has been negotiated for the current-VTE. The acknowledgement procedures only apply if specifically requested in the VT-DELIVER primitive.

Other service elements cause the forwarding and delivery actions to occur but do not cause a VT-DELIVER indication to be issued. The tables appropriate to these elements specify when this is to occur.

8.7 Token Management

The Token Management procedures allow a VTPM to pass the data token to the peer VTPM or to request the tokens from

the peer VTPM. They apply to S-mode only. These procedures are defined in table 14.

8.8 Break and Exception

The VT-BREAK procedures provide the protocol facilities to support the VT-BREAK service, which is a destructive interrupt service available to either VT-user independently of the mode of operation or the ownership of access-rights.

The VT-EXCEPTION procedures provide the protocol facilities to support the VT-EXCEPTION service, which is a destructive interrupt service available to either VTPM independently of the mode of operation or the ownership of access-rights.

These procedures take precedence over other procedures and are defined in table 15.

Table 7 - Agreed Release procedures

Step	VTPM	Event	Action
<u>Agreed Release with Tokens</u>			
1a	I	VT-RELEASE request while holding tokens	Forward data as specified in table 9 or 10. Send RLQ.
2aa	T	RLQ without collision	Perform data delivery as specified in table 9 or 10. Issue a VT-RELEASE indication.
3aaa	T	VT-RELEASE response with VT-result = "success"	Forward data as specified in table 9 or 10. Send RLR with VT-result = "success".
4aaa	I	RLR with VT-result = "success"	Deliver data as specified in table 9 or 10. Issue VT-RELEASE confirm with VT-result = "success". Sequence ends.
<u>Refusal of Release</u>			
3aab	T	VT-RELEASE response with VT-result = "failure"	Send an RLR with VT-result = "failure".
4aab	I	RLR with VT-result = "failure"	Issue a VT-RELEASE confirm with VT-result = "failure". Do not perform data delivery. Sequence ends.
<u>Release Collision</u>			
2ab	T	RLQ when delivery acknowledgement is pending and negotiated release is available	Send RLR with VT-result="failure" and failure-reason = "collision-detected". Continue to await DAQ.
2ac	T	RLQ when delivery acknowledgement is pending and negotiated release is not available	Deliver data as specified in table 9 or 10. Issue VT-RELEASE indication. Sequence ends.
3ab	I	DLQ with request for acknowledgement instead of RLR	None.
4ab	I	RLR with VT-result = "failure"	Issue VT-RELEASE confirm with VT-result = "failure" and failure-reason = "collision-detected". Perform normal delivery action. Issue VT-DELIVER indication with request for acknowledgement. Proceed at step 3 of table 13 as the target VTPM.
<u>Agreed Release without Token</u>			
1b	I	VT-RELEASE, when tokens not held	Send RTQ.
2ba	T	RTQ, holding tokens	Send GTQ.
3baa	I	GTQ	Forward data. Send RLQ.
4baaa	T	RLQ without collision	Perform data delivery as specified in table 9 or 10. Issue VT-RELEASE indication.
5baaaa	T	VT-RELEASE response with VT-result = "success"	Forward data as specified in table 9 or 10. Send RLR with VT-result = "success".
6baaaa	I	RLR with VT-result = "success"	Deliver data as specified in table 9 or 10. Issue VT-RELEASE confirm with VT-result = "success". Sequence ends.

Table 7 (concluded)

Step	VTPM	Event	Action
<u>Refusal of Release</u>			
5baaab	T	VT-RELEASE response with VT-result = "failure"	Send RLR with VT-result = "failure".
6baaab	I	RLR with VT-result = "failure"	Issue VT-RELEASE confirm with VT-result = "failure" (take no action in respect of data in transit). Sequence ends.
<u>Release Collision</u>			
2bb	T	RTQ and tokens not held (because of collision with token passing procedure)	None.
3bb	I	GTQ	Proceed with step 3baa of table 7.
2bc	T	RTQ when awaiting RLR	None (continue to await RLR)
3bab	I	RLQ instead of GTQ	Issue VT-RELEASE confirm with VT-result = "failure" and failure-reason = "collision-detected". Proceed with step 2aa of table 7 as the target VTPM.
4baab	T	RLQ when delivery acknowledgement is pending	Send RLR with VT-result = "failure".
5baab	I	DLQ with request for acknowledgement instead of RLR	None.
6baab	I	RLR with VT-result = "failure"	Issue VT-RELEASE confirm with VT-result = "failure" and failure-reason = "collision-detected". Perform normal delivery action. Issue VT-DELIVER indication with request for acknowledgement. Proceed at step 3 of table 13 as the target VTPM.

Table 8 - Unconditional Release procedures

Step	VTPM	Event	Action
<u>User Initiated Termination</u>			
1	I	VT-U-ABORT request	Send AUQ with VT-user-failure-reason taken from the VT-U-ABORT request (any data in transit or other actions in progress are abandoned).
2	T	AUQ and VT-ASSOCIATE indication has been issued by the VTPM and the VT-User has issued neither a VT-U-ABORT request nor a VT-RELEASE response with VT-result = "success"	Issue a VT-U-ABORT indication with VT-user-failure-reason parameter from AUQ.

Table 8 (concluded)

Step	VTPM	Event	Action
VTPM Initiated Termination			
1	I	Some internal problem which prevents the VTPM from continuing normally	Send APQ with VT-reason = "local-error". Issue a VT-P-ABORT indication with appropriate VT-reason (data in transit or other actions in progress are abandoned).
2	T	APQ with VT-reason = "local-error" and VT-ASSOCIATE indication has been issued by the VTPM and VT-User has issued neither a VT-U-ABORT request nor a VT-RELEASE response with VT-result = "success"	Issue a VT-P-ABORT indication with appropriate VT-reason parameter.
Supporting Service Initiated Termination			
1	E	PAB	Abandon any data in transit and actions in progress. Issue VT-P-ABORT indication with VT-reason information as provided by the supporting service.

Table 9 - S-mode Normal Data Transfer procedures

Step	VTPM	Event	Action
1	S	VT-DATA request addressing a control object with CO-priority = "normal" or a display object. At the convenience of the VTPM	Send NDQ containing the updates in a manner so as to maintain the relative sequence of CCA object updates.
2a	S	VT-DELIVER, VT-GIVE-TOKEN or VT-RELEASE request	Send any NDQs not yet forwarded. Take action appropriate to primitive.
2b	S	VT-DATA request addressing a control object for which CO-trigger = "selected"	Send any NDQs not yet forwarded. Send GTQ.
3aa/3ba	R	NDQ when no-delivery-control or simple-delivery-control is in effect	Process the updates so as to maintain the order of updates. Issue VT-DATA indication maintaining the 1:1 relation of requests and indications.
3ab/3bb	R	DLQ, GTQ, or RLQ	Process the updates so as to maintain the order of updates. Issue VT-DATA indication maintaining the 1:1 relation of requests and indications. Sequence ends.
3ac/3bc	R	NDQ when quarantined delivery control is in effect	Store updates in NDQ (the number of indications may in effect not be 1:1 with the number of VT-DATA requests due to possible net effecting. For the timing of this see events for DLQ, RLQ, and GTQ).

Table 10 - A-mode Normal Data Transfer procedures

Step	VTPM	Event	Action
1	S	VT-DATA request to a control object for which CO-priority = "normal", or a Display Object. At the convenience of the VTPM	Send NDQ expressing the updates and maintaining the relative sequence of display and control object updates. (If quarantine-delivery-control is in effect there need not be a 1:1 correspondence between VT-DATA requests and NDQs (net effecting).)
2a	R	NDQ when no-delivery-control is in effect	Process updates so as to maintain the order of updates. Issue VT-DATA indication maintaining the 1:1 relation of requests and indications.
2b	R	NDQ when simple-delivery-control is in effect	Process updates in the NDQ so as to maintain the order of updates. Issue VT-DATA indication maintaining the 1:1 relation of requests and indications. (The receipt of other PDUs will cause the updates to be applied and will send NDQ actions as well, see DLQ and RLQ.)
2c	R	NDQ when quarantine-delivery-control is in effect	Store updates in NDQ. (The number of indications may not be 1:1 with the number of VT-DATA requests, due to possible net effecting. For the timing of this see events for DLQ.)
3	S	VT-DELIVER or VT-RELEASE request, or VT-RELEASE response with VT-result = "accepted", or a VT-DATA request addressing a control object for which CO-trigger = "selected"	Send NDQs in accordance with any CCA updates received in preceding VT-DATA requests but not yet forwarded by the VTPM, maintaining the relative sequence of display and control object updates. In the case of a "trigger" object, the update to that object is transmitted as the whole or part of a final NDQ.
4	R	RLQ, DLQ or RLR with VT-result = "accepted", or NDQ updating a control object for which CO-trigger = "selected"	Update the local CCA replica with any updates specified in previous NDQs but not yet implemented, maintaining the relative sequence of display and control object updates. Issue VT-DATA indications in accordance with updates to CCA specified in previous NDQs not yet notified to the VT-user and maintaining their relative sequence. (If quarantine-delivery-control is in effect, there is not necessarily a 1:1 correspondence between the VT-DATA indications and the originating VT-DATA requests (due to net effecting). Otherwise there is a 1:1 correspondence. In the case of RLR, RLQ and DLQ protocol data units, further action is specified under release and delivery, see tables 7, 8, & 13.)