


Patrol Route Plan

Central Line Route CD22: Northolt to Hanger Lane (Both Roads)



R2744, Issue: A1, January 2014

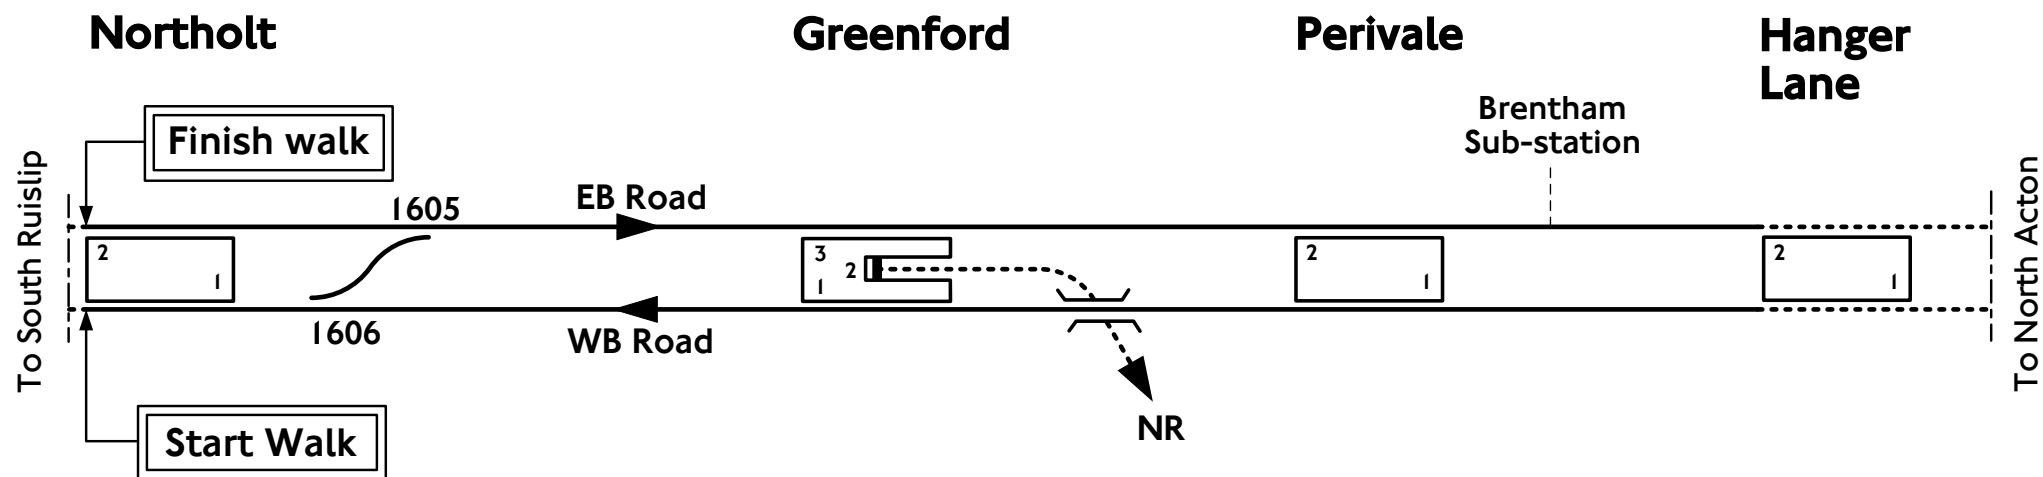

CD22 Patrol

Central Line Route CD22: Northolt to Hanger Lane (Both Roads)

Patrol starts at the west end of Northolt platform 1,
LCS C163/CWBFA 135m

Obtain briefing from supervisor and travel to Northolt Station.

Set up the protection arrangements and patrol the westbound road eastwards from the start to the west end of Hanger Lane platform 1, LCS C153/CWBFA 134m, via 1606 points, Greenford and Perivale platforms 1.

Inspect all P&C associated with 1606 points.

Cross to eastbound road at the west end of Hanger Lane platform 2, LCS C153/CEBFA 0m and patrol the eastbound road westwards to the west end of Northolt platform 2, LCS C163/CEBFA 0m via Perivale platform 2, Greenford platform 3 and 1605 points.

Inspect all P&C associated with 1605 points.

Finish the patrol at Northolt Station.

Complete the patrol reporting process as in W1328 Patrolling the track.

Items needing particular attention

Check for:

- Broken crossing bolts, broken chairs/baseplates, safety blocks, sidecut, wear and damage and wear to P&C on 1605 and 1606 points.
- Cracks on stretcher bars.
- Scrap and report .
- Junction plates, which should be clearly marked.
- Corrosion from dripping structures on rails.
- Debris and ballast in all fixtures and fittings.
- Any line side storage licences which must have correct date shown.
- Broken juice pots, anchors.
- Wet beds.
- Bad top and line, bad sleeper alignment, sidecut and wear.
- Vegetation problems.
- Drainage problems.
- Stability of the embankments between Greenford to Perivale.
- Ballast retention at run on/off at bridges.
- Red bonds on Network Rail overhead power cables.

Note:

Make sure you stay 2m away from Network Rail boundary at Greenford.