



BSI Standards Publication

Thermal standardization on semiconductor packages

Part 1: Thermal resistance and thermal parameter of
BGA, QFP type semiconductor packages

National foreword

This Published Document is the UK implementation of IEC TR 63378-1:2021.

The UK participation in its preparation was entrusted to Technical Committee EPL/47, Semiconductors.

A list of organizations represented on this committee can be obtained on request to its committee manager.

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient's own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

This publication is not to be regarded as a British Standard.

© The British Standards Institution 2022
Published by BSI Standards Limited 2022

ISBN 978 0 539 17152 5

ICS 31.080.01

Compliance with a Published Document cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 January 2022.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

TECHNICAL REPORT



**Thermal standardization on semiconductor packages –
Part 1: Thermal resistance and thermal parameter of BGA, QFP type
semiconductor packages**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.080.01

ISBN 978-2-8322-1062-3

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references	5
3 Terms and definitions	5
3.1 Terms and letter symbols related to temperature (unit [°C or K])	5
3.2 Terms and letter symbols related to thermal characteristics	6
4 Accuracy of θ_{JA}	10
4.1 Variation of θ_{JA}	10
4.1.1 General	10
4.1.2 Analysis model	10
4.1.3 Simulation conditions (typical values)	11
4.1.4 Evaluation items and standards	11
4.1.5 Evaluation results	12
4.1.6 Summary	17
4.2 Discrepancy of θ_{JA}	18
5 Guideline for thermal design	19
Bibliography.....	20
Figure 1 – Definition of temperature	6
Figure 2 – Definition of thermal resistance	7
Figure 3 – Thermal resistance.....	8
Figure 4 – Thermal resistance and thermal characterization parameter.....	9
Figure 5 – Thermal characterization parameter	10
Figure 6 – Simulation conditions	11
Figure 7 – θ_{JA} dependence on board remaining copper rate (BGA)	12
Figure 8 – θ_{JA} dependence on remaining copper rate (LQFP)	13
Figure 9 – θ_{JA} dependence on ambient air temperature T_A (BGA)	14
Figure 10 – θ_{JA} dependence on ambient air temperature T_A (LQFP)	15
Figure 11 – θ_{JA} dependence on power dissipation (BGA)	16
Figure 12 – θ_{JA} dependence on power dissipation (LQFP)	17
Figure 13 – Influence items and their impact on θ_{JA}	17
Figure 14 – The gap of θ_{JA} by the difference of the environment	19
Table 1 – Evaluation items and evaluation parameters.....	11

INTERNATIONAL ELECTROTECHNICAL COMMISSION

THERMAL STANDARDIZATION ON SEMICONDUCTOR PACKAGES –**Part 1: Thermal resistance and thermal parameter of BGA,
QFP type semiconductor packages**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TR 63378-1 has been prepared by subcommittee 47D: Semiconductor devices packaging, of IEC technical committee 47: Semiconductor devices. It is a Technical Report.

The text of this Technical Report is based on the following documents:

Draft	Report on voting
47D/928/DTR	47D/935/RVDTR

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Report is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 63378 series, published under the general title *Thermal standardization on semiconductor packages*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

THERMAL STANDARDIZATION ON SEMICONDUCTOR PACKAGES –

Part 1: Thermal resistance and thermal parameter of BGA, QFP type semiconductor packages

1 Scope

This part of IEC 63378 specifies the terms and definitions that are commonly used for thermal characteristics of BGA and QFP type semiconductor packages, and guidelines to use these thermal characteristics.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60191-4, *Mechanical standardization of semiconductor devices – Part 4: Coding system and classification into forms of package outlines for semiconductor device packages*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60191-4 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 Terms and letter symbols related to temperature (unit [°C or K])

3.1.1 ambient air temperature

T_A

temperature of ambient air at location adequately distant from the package (see Figure 1)

Note 1 to entry: Conceptually, it refers to an ambient air temperature at a location that is not affected by the semiconductor package to be measured.

3.1.2 junction temperature

T_J

temperature of at an arbitrary position of the chip (see Figure 1)

Note 1 to entry: Especially when there is no specification, it is considered as the centre of a chip.

Note 2 to entry: Junction refers to the junction area of a semiconductor. Assuming that heat is generated at the junction of p-type and n-type, temperature at the junction becomes high and is used as representing temperature for semiconductor devices. Because there are many junctions built into a real chip, the term junction is used synonymously as the chip. The location is commonly placed at the centre of the circuit surface of the chip, although location dependence may be taken into consideration for chips requiring high power consumption.

3.1.3 case temperature

T_C

temperature at an arbitrary position on the surface of a package (see Figure 1)

Note 1 to entry: Especially when there is no specification, it is considered as the centre of a chip upper part.

3.1.4 top temperature

T_T

temperature at the centre of the package's upper surface (see Figure 1)

Note 1 to entry: Defined as T_T due to T_C used as definition for special surface at back of package of power device, etc. For normal package such as BGA, T_C and T_T are used synonymously.

3.1.5 board temperature

T_B

temperature of the board which is distant from an arbitrary end of a package 1 mm (see Figure 1)

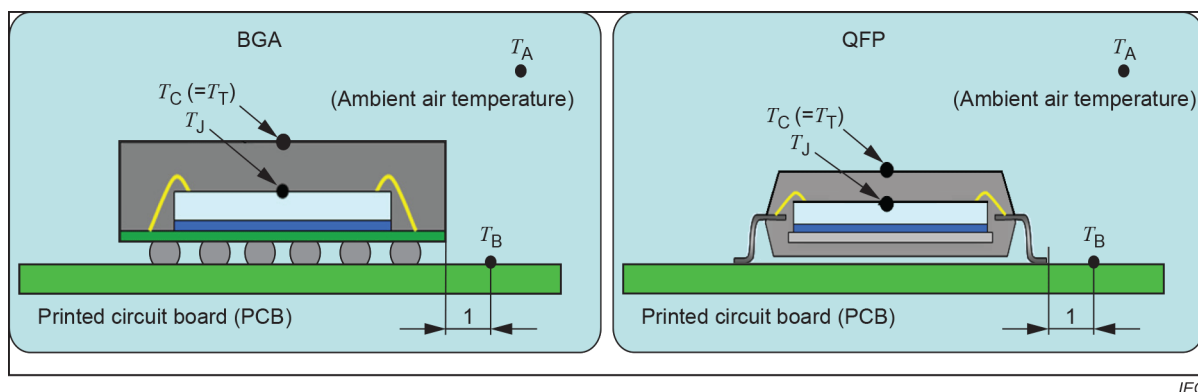


Figure 1 – Definition of temperature

3.2 Terms and letter symbols related to thermal characteristics

3.2.1 thermal resistance

quotient of the difference between the virtual temperature of the device and the temperature of a stated external reference point, by the steady-state power dissipation in the device (see Figure 2)