

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

**REV.
A**

AS25066™

FEDERAL SUPPLY CLASS
5975

RATIONALE


THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8A ELECTRICAL WIRING AND FIBER OPTIC INTERCONNECT SYSTEM INSTALLATION COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. THE CONDUIT IS A WELL ESTABLISH TECHNOLOGY WITH NO PROCUREMENT SPECIFICATION. REFER TO AS50881 FOR CONDUIT APPLICATIONS.

STABILIZED NOTICE

THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE AE-8A ELECTRIC WIRING AND FIBER OPTIC INTERCONNECT SYSTEMS INSTALL COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.

For more information on this standard, visit
<https://www.sae.org/standards/content/AS25066A>

THIRD ANGLE PROJECTION



CUSTODIAN:AE-8A

PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

CONDUIT ASSEMBLY, NUT, FLEXIBLE,
RADIO FREQUENCY SHIELDING

AS25066™

**REV.
A**



Copyright © 2021 SAE International
 All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
 Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
 Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 2011-07 REAFFIRMED 2016-11 STABILIZED 2021-11

NOTICE

AS25066 PROVIDE NUTS FOR AS25065 COLLAR AND AS20567 CONDUIT ASSEMBLY, REQUIRES NO QUALIFICATION, AND HAS NO PROCUREMENT SPECIFICATION

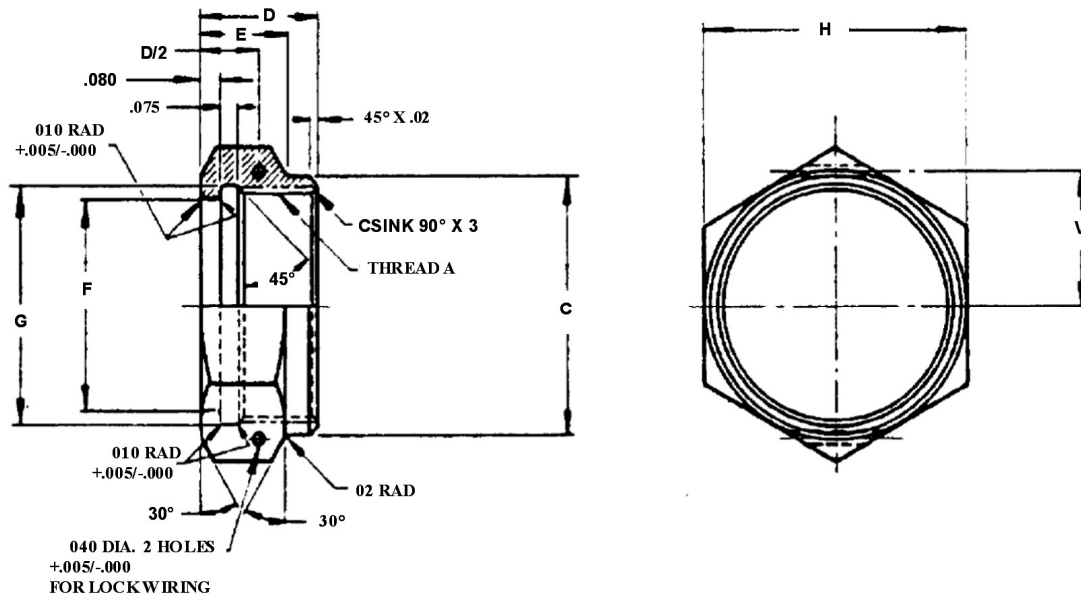


FIGURE 1 – AS25066 NUT

TABLE 1 – AS25066 DIMENSIONS

PART NO. MS25066	THREAD A (UNEF-3B)	B DIA.	C DIA.	D	E	F DIA.		G DIA.		H	V
						MAX	MIN	MAX	MIN		
-8 1/	.500-28	.513	.605	.50	.38	.396	.391	.513	.503	.625	.297
-10	.625-24	.639	.730			.521	.516	.639	.629	.750	.375
-11	.675-24	.701	.740			.584	.579	.701	.691	.750	.375 (+.010 -.000)
-12	.750-20	.765	.855			.646	.641	.761	.755	.875	.438
-14	.875-20	.891	.980			.773	.770	.891	.881	1.000	.500
-16	1.000-20	1.016	1.105			.898	.895	1.016	1.005	1.125	.562

1/ -8 NUT SHALL BE STOCK FOR U.S. GOVERNMENT ACTIVITIES ONLY AS A PART OF MS25065-2 ASSEMBLY.



AEROSPACE STANDARD

CONDUIT ASSEMBLY, NUT, FLEXIBLE,
RADIO FREQUENCY SHIELDING

AS25066™
SHEET 1 OF 2

REV.
A



Documents

Document Sharing Hub